

7/8"-T-COUPLER

T-coupler

Female straight – female/male straight

7/8" – 7/8", 5-pole




Parallel circuit

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

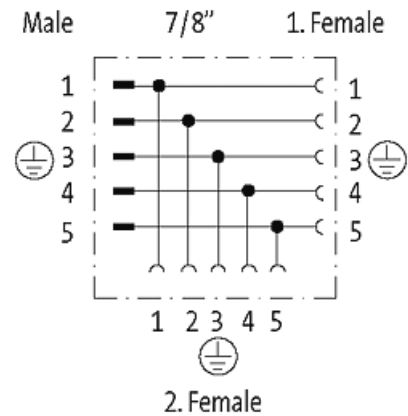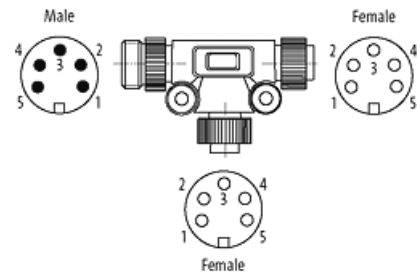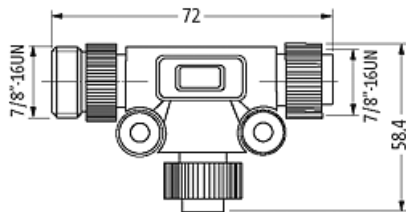

Product may differ from Image

Form

Form 50061

Technical Data

Operating voltage	max. 50 V AC/DC
Operating current per contact	max. 8 A
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting

General data

Mounting method	inserted, tightened
Temperature range	-20...+80 °C

Commercial data

country of origin CN

customs tariff number	85366990
EAN	4048879138130
eClass	27143423
Packaging unit	1