



## MIRO TR 70-130VAC/DC FK OPTO-COUPLER MODULE

IN: 130 VAC/DC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A  
110 V AC/DC  
Spring clamp terminals

### [Link to Product](#)

#### Illustration

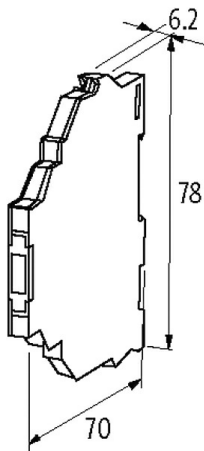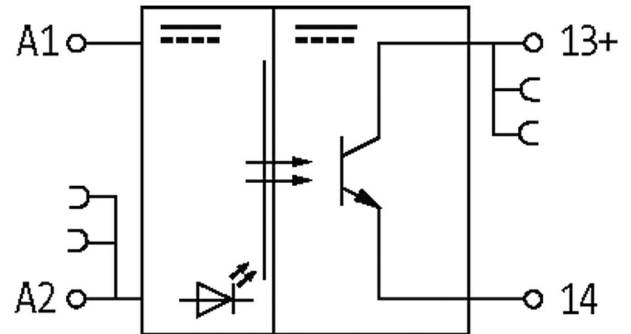

Product may differ from Image



#### General data

|                        |                                |
|------------------------|--------------------------------|
| Mounting method        | DIN-rail mountable (EN 60715)  |
| Temperature range      | -20...+60 °C                   |
| Test isolation voltage | 3.75 kV                        |
| Housing                | Black plastic, flame retardant |
| Dimensions HxWxD       | 78x6.2x70 mm                   |

#### Output

|                                    |                               |
|------------------------------------|-------------------------------|
| Leakage current (output is open)   | max. 0.3 mA                   |
| Switching time ON/OFF              | 100/700 µs                    |
| Saturation voltage (across output) | max. 1.2 V DC                 |
| Switching voltage                  | 5...48 V DC                   |
| Switching frequency                | max. 500/30 Hz (resist./ind.) |
| Switching current per output       | 0.1 mA...0.5 A                |

**Input**

|                   |                  |
|-------------------|------------------|
| Control current   | 6 mA             |
| Voltage range OFF | 0...30 V AC/DC   |
| Voltage range ON  | 70...130 V AC/DC |
| LED display       | LED (yellow)     |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85414900      |
| EAN                   | 4048879021838 |
| eClass                | 27371601      |
| Packaging unit        | 1.000         |