

**M12 female 0° D-cod. / RJ45 male 0° shielded**

PUR 1x4xAWG22 shielded gn UL/CSA 28m

Ethernet CAT5

Female straight – male straight

M12 – RJ45, 4-pole

D-coded

shielded

Transmission properties with channel transmission up to 100 m


Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Female



Male

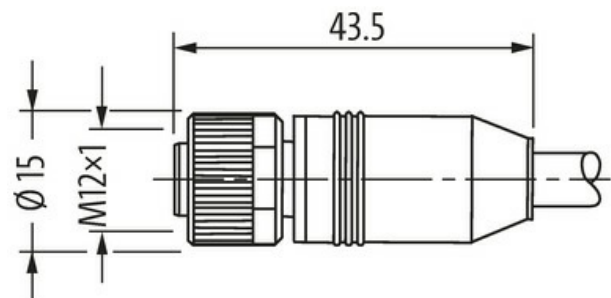



Product may differ from Image



\* only for products with UL/CSA approved cable

| Form                                      |  |
|---|--|
| Form                                      | 44621  |
| Technical Data                            |  |
| Operating voltage                         | max. 60 V DC   |
| Operating voltage (only UL listed)        | 30 V DC  |
| Rated surge voltage                       | 1.0 kV   |
| Operating current per contact             | max. 1.5 A   |
| Transfer parameters                       | CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)                 |
| Transfer rate                             | up to 100 Mbit/s full duplex                                     |
| Material group                            | IEC 60664-1, category I  |
| Coding                                    | D-coded  |
| LED display                               | no   |
| Locking of ports                          | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Compression gland                         | M12 (SW13)   |
| Protection                                | IP67 (M12) - IP20 (RJ45)   |
| Material                                  | PUR  |
| Locking material                          | Zinc die casting, matte nickel plated                            |
| suitable for corrugated tube (internal Ø) | without  |
| General data                              |  |
| Standards                                 | DIN EN 61076-2-101 (M12)   |
| Mounting method                           | inserted, tightened  |
| Material (gasket)                         | FKM  |
| Pollution Degree                          | 3  |
| Temperature range                         | -25...+85 °C, depending on cable quality                         |
| Cables                                    |  |
| Cable identification                      | 794  |
| Approval (cable)                          | cURus (AWM-Style 20549/10578), CE-conform                        |
| Cable weight [g/m]                        | 75,87 g  |
| Material (wire)                           | Cu wire, bare  |
| Resistor (core)                           | max. 55 Ω/km (20 °C)   |
| Construction (core)                       | 7 × 0.254 mm   |
| Diameter (core)                           | 1 × 4 × AWG22/7  |
| AWG                                       | similar to AWG 22  |
| Material (wire isolation)                 | PE   |
| Wire-Ø incl. isolation                    | 1.55 mm ±5%  |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

|                            |   |
|----------------------------|---|
| Color/numbering of wires   | wh, ye, bl, or  |
| Shield                     | yes   |
| optical shield cover       | min. 85%  |
| Material (jacket)          | PUR   |
| Outer-Ø (jacket)           | 6.7 mm ±5%  |
| Color (jacket)             | green   |
| chemical resistance        | Oil resistance according to IEC 60811-2-1, ASTM IRM 901, ICEA S-82-552 Std.               |
| thermal resistance         | flame-retardant according to UL 1581 section 1090, section 1100 (FT2), IEC 60332-1-2 Std. |
| Nominal voltage            | 300 V   |
| Temperature range (fixed)  | -40...+80 °C  |
| Temperature range (mobile) | -30...+70 °C  |
| Bend radius (fixed)        | 6× outer Ø  |
| Bend radius (moving)       | 12× outer Ø   |

#### Commercial data

|                       |               |
|-----------------------|---------------|
| country of origin     | DE            |
| customs tariff number | 85444290      |
| EAN                   | 4048879782951 |
| eClass                | 27061801      |
| Packaging unit        | 1.000         |