

MIRO BT DP 0,1875 S-4 - phasing out of this product

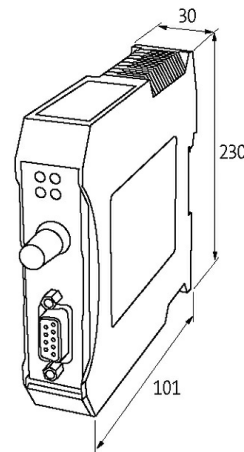
Bluetooth Slave Profibus-DP 0,1875 MBit/s max. 4 participants

PROFIBUS

Radio Slave Module

187.5 kbit/s

Connection cables are in the online shop under "Connection Technology".

Link to Product**Illustration**

Product may differ from Image

Technical Data

Operating voltage	9...33 V DC
Transfer rate	187.5 kbit/s
Frequency	2.4 GHz Bluetooth
Current consumption	200 mA (24 V DC)

General data

Standards	approved in: BE, DK, DE, EE, FI, FR (restricted), GB, IE, IS, IT, CA, LV, LT, LU, MT, NL, NO (without Spitzbergen), AT, PL, PT, SE, CH, SK, SI, EL, ES, CZ, HU, US, CY
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+75 °C)
Housing	Black plastic
Protection	IP54
Connection	Screw terminals: max. 2.5 mm ² (AWG 14)
Dimensions H×W×D	230×101×30 mm

Connections

Fieldbus	SUB-D, 9-pole
----------	---------------

Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879365147
Packaging unit	1.000