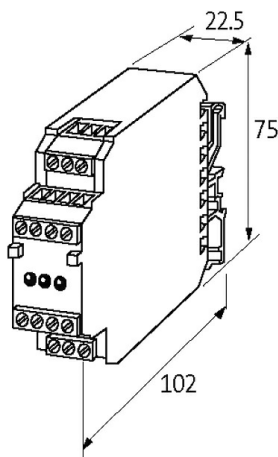
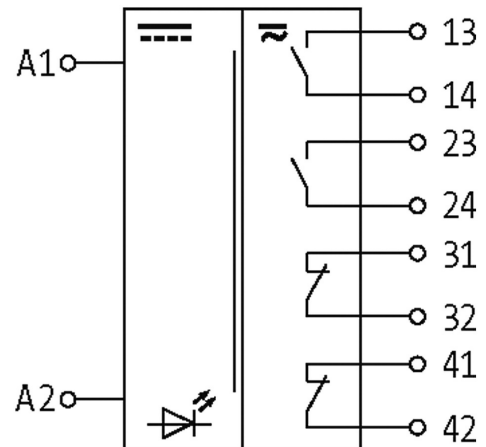


RM 122/24 OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 5 A

1 relay; 2 NO contacts/2 NC contacts
5 A
24 V DC
with force guided contacts
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+50 °C
Test isolation voltage	2.5 kV
Mech./ elect. life	1 000 000 switching cycles/load dependent
Dimensions HxWxD	75x22.5x85 mm

Output

Min. load current	300 mA
Contact material	Ag Ni 10 hv
Energize/release/contact bounce time	15/15/2 ms

Switching voltage	max. 250 V AC/DC
Switching frequency	max. 0.1 Hz (with load)
Power rating (voltage dependent)	max. 1000 VA/50 W
Switching current per output	max. 5 A

Input

Connection voltage - current	24 V DC (21.6...28 V DC) - 29 mA
LED display	LED (red)

Utilization category

AC-15	4 A (24 V AC); 3 A (110 V AC); 2 A (230 V AC)
AC-1	5 A (24/110/230 V AC)
DC-13	2 A (24 V DC); 0.4 A (110 V DC); 0.2 A (230 V DC)

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879027694
eClass	27371001
Packaging unit	1.000