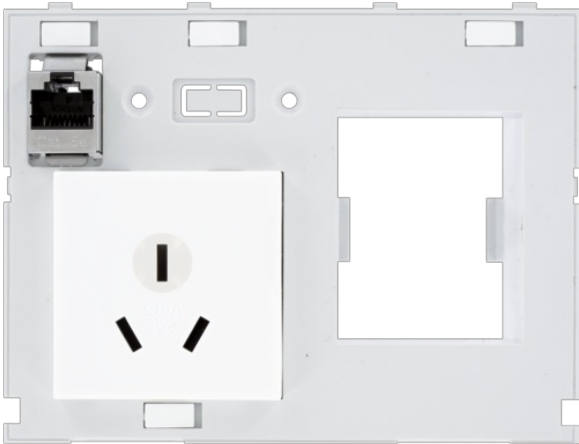


MODLINK MSDD DBL COMBI INSERT CHINA

1xRJ45 fem./fem. + RCD opening

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Dimensions H×W×D 88×116×69 mm

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

China (CCC)

Operating current	10 A
Connection	Screw terminals: max. 2× 4 mm ² (single/stranded wire)
Operating voltage	250 V AC
No. of poles	2 + PE

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879618991
eClass	27189217
Packaging unit	1.000