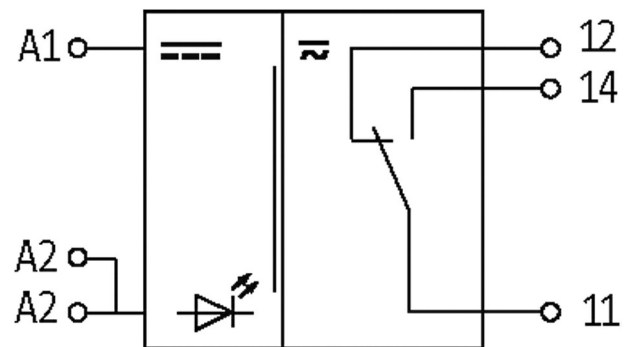


RMIE 11/24 INPUT RELAY

IN: 24 VDC - OUT: 125 VAC/DC / 1 A

1 relay; 1 NO/NC contact
 1 A
 24 V DC
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	1.5 kV
Mech./ elect. life	200 000 000 switching cycles/load dependent

Output

Min. load current	1 mA
Contact material	Pd Ni-Au Rh
Energize/release/contact bounce time	10/15/2 ms
Switching voltage	max. 125 V AC/DC
Switching frequency	max. 0.1 Hz (with load)
Power rating (voltage dependent)	max. 60 VA/30 W
Switching current per output	max. 1 A

Input

Connection voltage - current	24 V DC (19.2...30 V DC) - 12 mA
LED display	LED (yellow)

Utilization category

AC-15	0.5 A (50 V AC)
AC-1	1 A (50 V AC)
DC-13	0.25 A (50 V AC)

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879027403
eClass	27371001

Packaging unit

1.000