

**MOSA M12 FEMALE 0° FIELD-WIREABLE (IDC)**

With corrugated tube connection NS13

Female straight

M12, 4-pole

IDC terminals

Connection cross section: 0.25...0.5 mm<sup>2</sup>




Tube adapter

Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Link to Product](#)****Illustration**

## Female

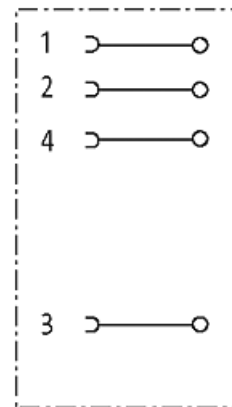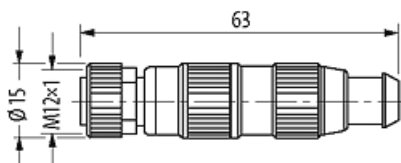

Product may differ from Image

**Form**

Form 12602

**Technical Data**

Operating voltage	max. 32 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.25...0.5 mm <sup>2</sup> (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	4...5.1 mm
Wire isolation	PVC, PP, TPE
Outer wire Ø	1.2...1.6 mm
Locking of ports	Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)

