

Mico Pro Power module

IN: 24 V DC / 40A, 16mm²

Mico Pro® PM 24 V DC/40 A

Cover plate included

Shock load


1/2 sin 30 g, 11 ms

Build your own Mico Pro® online:

<https://micopro.murrelektronik.com>

Link to Product

Illustration

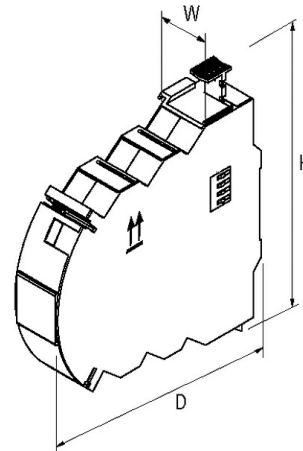

Product may differ from Image



General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions HxWxD	130x24x114 mm
Bridging concept	Bridge set (max. 40 A)
Shock load	1/2 sin 30 g, 11 ms

Output

Parallel usage/serial usage -/Selectivity in 2 levels

Input

Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A

Connections (IN)

Connection Bridge system

Connections (OUT)

Cross section (flex)	0.75...16 mm ² (AWG 20...4)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.75...16 mm ² (AWG 20...4)

Control inputs

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Input voltage (ON)	9...30 V DC
Impulse length (CTRL)	OFF "high" 40/400 ms, ON "high" 20/200 ms
Input voltage (CTRL)	9...30 V DC
Impulse length (ON)	"high" 120 ms

Control outputs

Early warning (90%)	max. 30 V AC/DC
Group alarm output	max. 30 V AC/DC

Commercial data

country of origin	CZ
customs tariff number	85363030
EAN	4048879830454
eClass	27371802
Packaging unit	1.000