


## MIRO TH 5VDC FK OPTO-COUPLER MODULE

IN: 5,5 VDC - OUT: 250 VAC / 0,5A



Triac 0.5 A  
5 V DC  
Spring clamp terminals

### [Link to Product](#)

#### Illustration

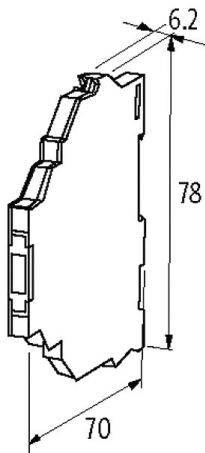

Product may differ from Image

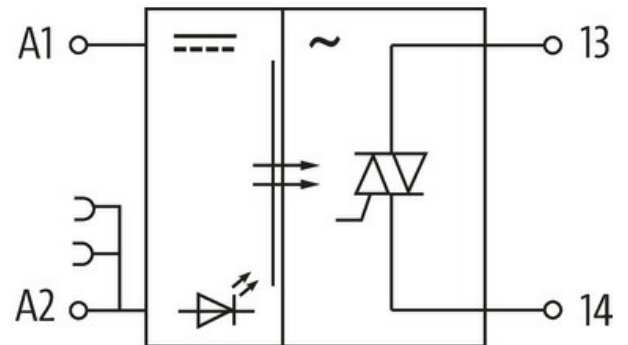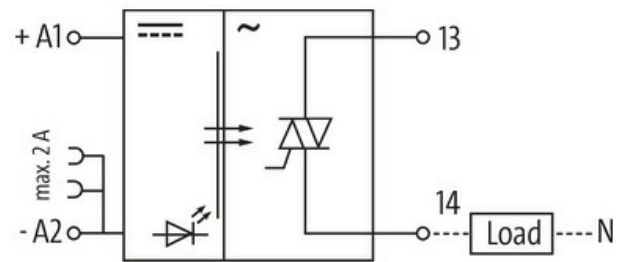

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

#### Output

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	24...250 V AC
Switching frequency	max. 20 Hz, depending on suppression
Switching current per output	2 mA...0.5 A

**Input**

Control current	6 mA
Voltage range OFF	0...2 V DC
Voltage range ON	4...5.5 V DC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879021715
eClass	27371601
Packaging unit	1.000