

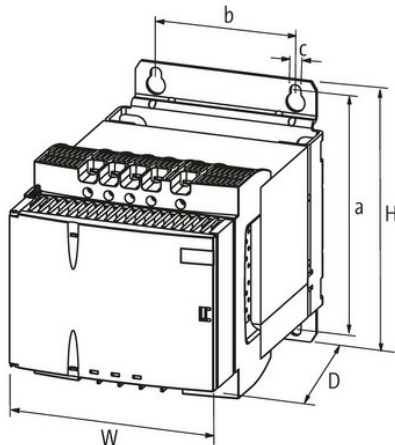
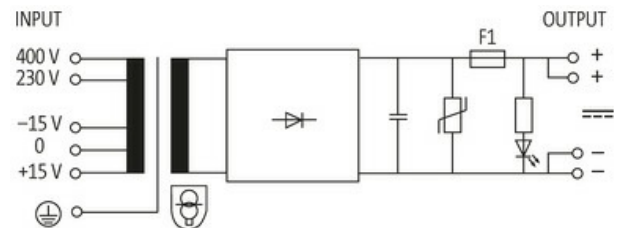
MTPS POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/0,5ADC

Current: 0.5 A

Output rating: 12 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	96×60×5.5 mm
Dimensions H×W×D	108×87×124 mm

Output

Output voltage	24 V DC (SELV)
----------------	----------------

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output suppression	LED, VDR and smoothing capacitor
Output fuse	0.5 A (T)
Output current	0.5 A
Ripple	max. 5% eff/rms

Input

Input voltage	230/400 ±15 V AC
Input fuse (external)	0.125 A (T) (230 V AC); 0.1 A (T) (400 V AC)
LED display	LED (green) for input voltage
Input current	0.10 A (230 V AC); 0.06 A (400 V AC)
Frequency	50...60 Hz

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879079877
eClass	27049002
Packaging unit	1.000