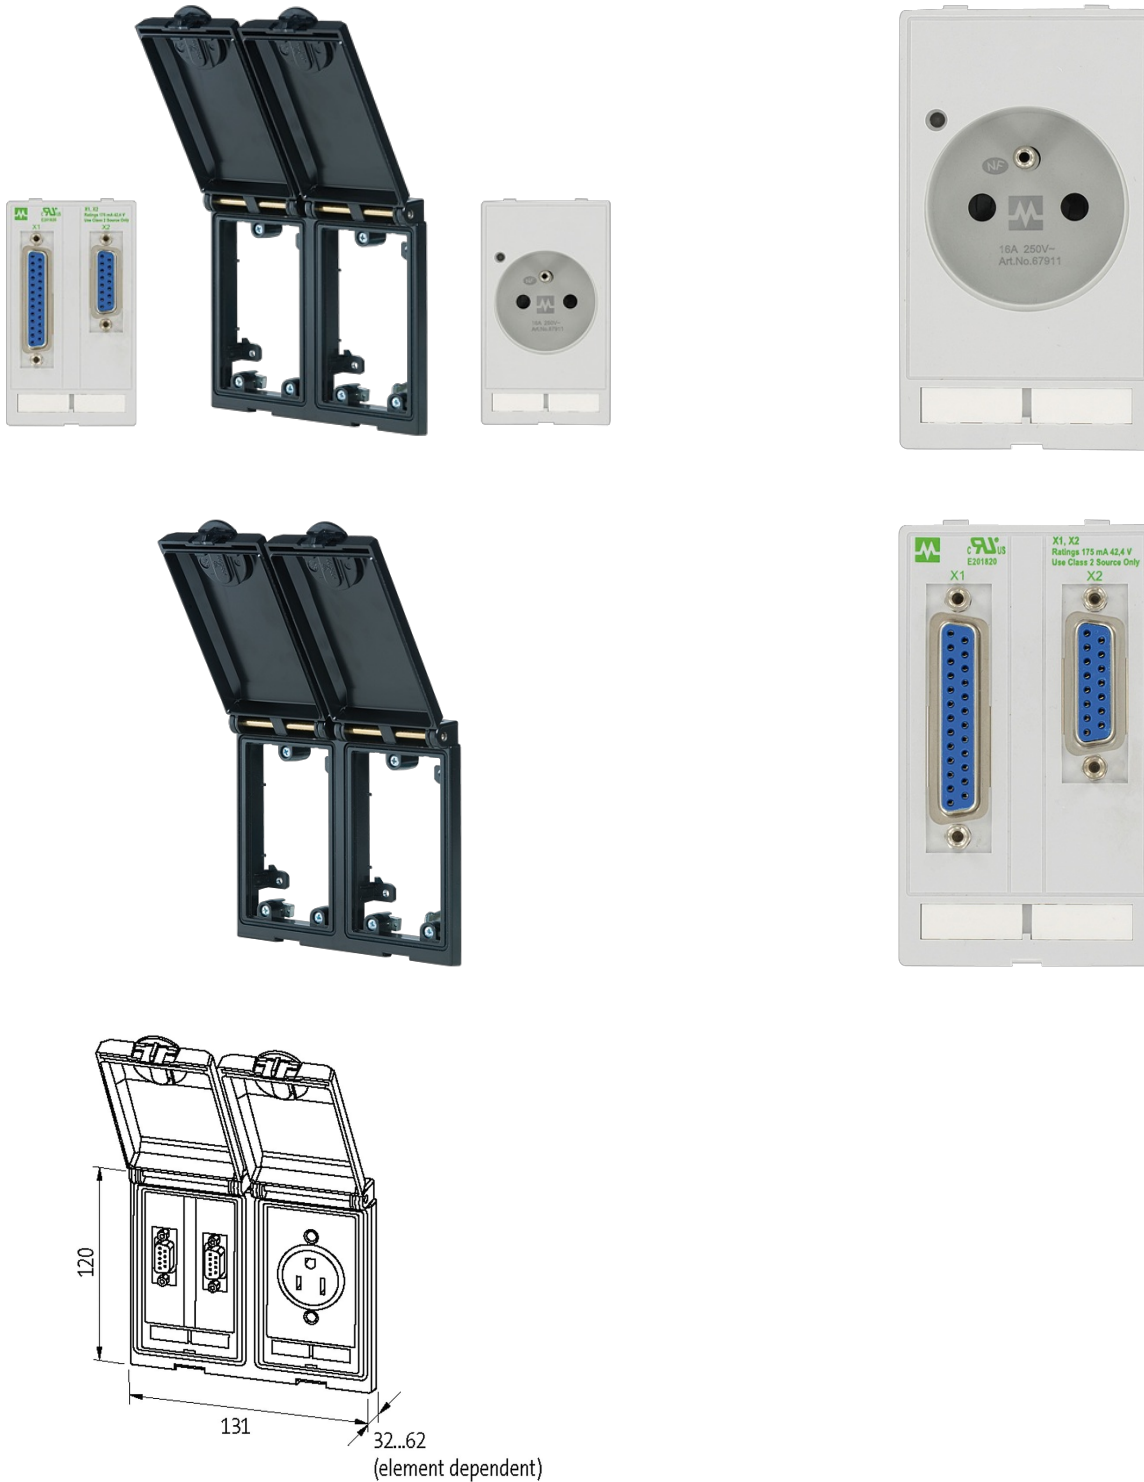


**Modlink MSDD-set: Frame 4000-68122-0000000,**

insert 4000-68000-0600000 + 4000-68000-0050000

[Link to Product](#)**Illustration**

Product may differ from Image

**Frame**

The information in this brochure has been compiled with the utmost care.  
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

|   |   |
|---|---|
| suitable for mounting with wall thickness | 1...5 mm  |
| Protection                                | IP65  |
| Housing                                   | Zinc die-casting, KTL coated                    |
| Temperature range                         | -10...+60 °C (storage temperature -25...+60 °C) |

**France (UTE-NF)**

|                   |   |
|-------------------|---|
| Operating voltage | 250 V AC  |
| Operating current | 16 A  |
| No. of poles      | 2 + PE  |
| Connection        | Screw terminals: max. 2× 6 mm <sup>2</sup> (AWG 10) |
| LED display       | yellow  |

**SUB-D25**

|                               |                        |
|-------------------------------|------------------------|
| Operating voltage             | 48 V AC/DC             |
| Operating voltage (UL Rating) | max. 30 V AC/42.4 V DC |
| Operating current             | 3 A                    |
| Operating current (UL Rating) | max. 175 mA            |
| No. of poles                  | 25-pole                |
| Connection front side         | SUB-D (female)         |
| Connection rear side          | SUB-D (male)           |
| Locking of ports              | UNC 4...40 bolt        |

**SUB-D15 HD**

|                               |                        |
|-------------------------------|------------------------|
| Operating voltage             | 48 V AC/DC             |
| Operating voltage (UL Rating) | max. 30 V AC/42.4 V DC |
| Operating current             | 3 A                    |
| Operating current (UL Rating) | max. 175 mA            |
| No. of poles                  | 15-pole                |
| Connection front side         | SUB-D (female)         |
| Connection rear side          | SUB-D (male)           |
| Locking of ports              | UNC 4...40 bolt        |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85389099      |
| EAN                   | 4048879035545 |
| eClass                | 27189217      |
| Packaging unit        | 1             |