

**PRE-WIRED CAP FOR EXACT8, 4XM8, 4-POL**

15.0m PUR 8x0,34+2x0,75, UL/CSA

for 4-way distribution box, 4-pole

Further cable lengths on request.




Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

5.0 m

[Link to Product](#)**Illustration**


M8-Females 4-pole

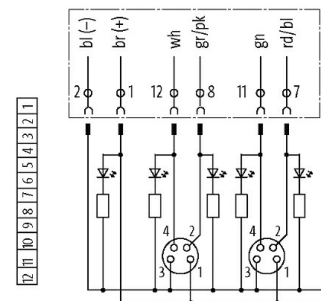 4 (S1)  2 (S2)  
 3 (-)  1 (+)


for 2 signals per port

1

2

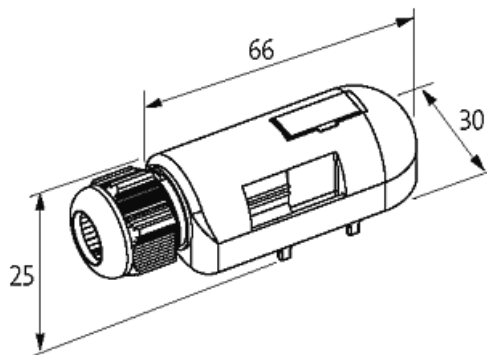

Product may differ from Image

**Technical Data**

Total current	max. 8 A
Housing	Plastic, flame retardant

**General data**

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

**Cables**

Cable number	360
No./diameter of wires	8 x 0.34 + 2 x 0.75 mm <sup>2</sup>

Wire isolation	TPE (brgn, whgn, rdbl, grpk, gr, ye, gn, wh+br, bl)
C-track properties	5 Mio.
Jacket Color	gray
Material (jacket)	PUR (UL/CSA)
Outer Ø	9.2 mm ±5%
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Color (jacket)	gray

**Commercial data**

country of origin	CZ
customs tariff number	85444290
EAN	4048879056120
eClass	27143423
Packaging unit	1