

**PRE-WIRED CAP FOR EXACT8, 6XM8, 4 POLE**

10.0m PUR 12x0.34+2x0,75, UL/CSA

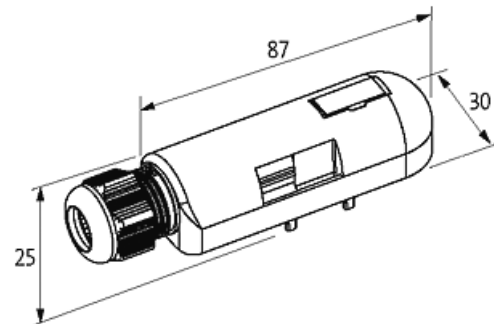
for 6-way distribution box, 4-pole

Further cable lengths on request.


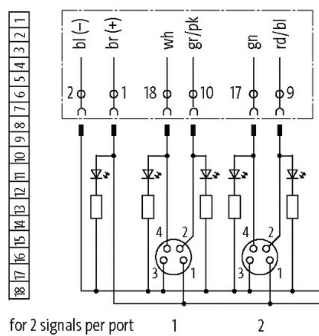
Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

10.0 m

**[Link to Product](#)****Illustration**

M8-Females 4-pole

 4 (S1) 2 (S2)  
 3 (-) 1 (+)
 


Product may differ from Image

**Technical Data**

Housing	Plastic, flame retardant
Total current	max. 8 A

**General data**

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

**Cables**

Cable number	389
No./diameter of wires	12x 0.34 + 2x 0.75 mm <sup>2</sup>
C-track properties	5 Mio.

Jacket Color	gray
Material (jacket)	PUR (UL/CSA)
Outer Ø	9.5 mm ±5%
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Approval (cable)	UL (AWM-Style 20233), CSA

**Commercial data**

country of origin	CZ
customs tariff number	85444290
EAN	4048879054829
eClass	27143423
Packaging unit	1