


MET SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:250VA IN:220...530VAC±20VAC OUT:230VAC

Single-phase safety transformer
250 VA
Isolation class T 40/B
Other voltages on request.

[Link to Product](#)

Illustration

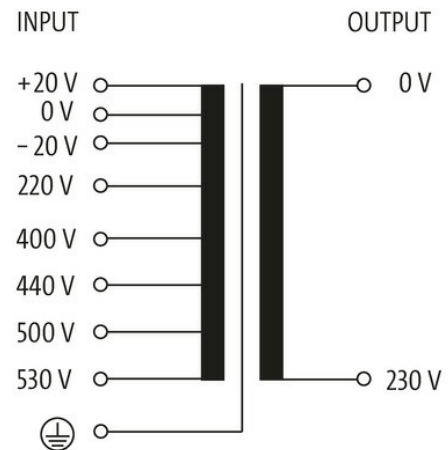

Product may differ from Image

General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -20...+80 °C)
Test isolation voltage	6.2 kV
Drill hole Ø	5.8x12 mm
Fixing centers a×b×c	74.4×90×5.8 mm
Dimensions H×W×D	92.4×120×122 mm

Output

Output voltage	230 V AC
Output rating	250 VA

Input	
Input voltage	220, 400, 440, 500, 530 V AC
Inrush current	18 A (220 V AC)
Short-circuit current	21 A (220 V AC)
Input current	1.28 A (220 V AC); 0.53 A (530 V AC)
Frequency	50...60 Hz
Commercial data	
country of origin	CZ
customs tariff number	85043180
EAN	4048879073943
eClass	27031202
Packaging unit	1.000