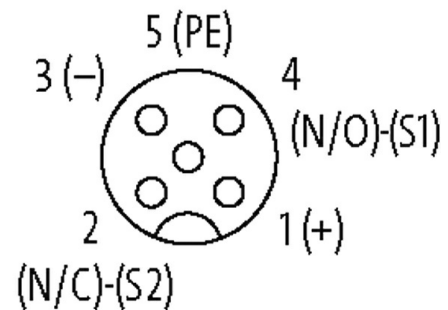


M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UQQ5.0-XA 5m PUR-CNOMO-cable 16x0,34/3x1

8-way, 5-pole
 PUR/PVC (CNOMO)
 5.0 m
 without LED
 Further cable lengths on request.

[Link to Product](#)**Illustration****M12 Females 5-pole**

Product may differ from Image

Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12x1 mm)
Signal per port	2
Total current	max. 10 A

General data

Temperature range	-20...+80 °C
Protection	IP67 inserted and tightened (EN 60529)
Dimensions HxWxD	127x54x29 mm

Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)

Commercial data

country of origin	CZ
customs tariff number	85444290
EAN	4048879000208
eClass	27279219
Packaging unit	1.000