



## MIRO TR 24VDC 24VDC 10A SK OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 10 A

Transistor 10 A  
24 V DC  
short-circuit and overload protected  
pulse switching  
Screw terminals

### [Link to Product](#)

#### Illustration

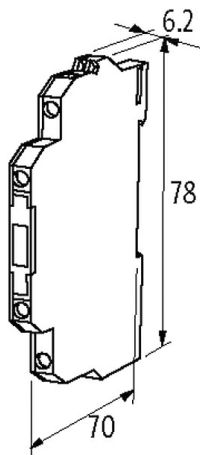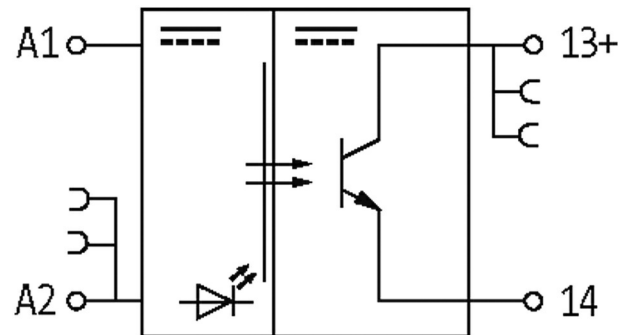

Product may differ from Image



#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

**Output**

Leakage current (output is open)	max. 25 $\mu$ A
Switching time ON/OFF	2/5 ms (10 A load)
Saturation voltage (across output)	max. 0.12 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1/0.1 Hz (resist./ind.)
Switching current per output	1 mA...10 A, short-circuit and overload protected (pulse switching)

**Input**

Control current	10 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879026796
eClass	27371604
Packaging unit	1.000