

## Xelity 10 TX IP67 M FE PN 4P

10 Port FE with PN  
 PROFINET - Managed Switch  
 M12 Power, 4-pole, L-coded  
 Connection cables are in the online shop under "Connection Technology".



### [Link to Product](#)

#### Illustration





Male

Female



Female

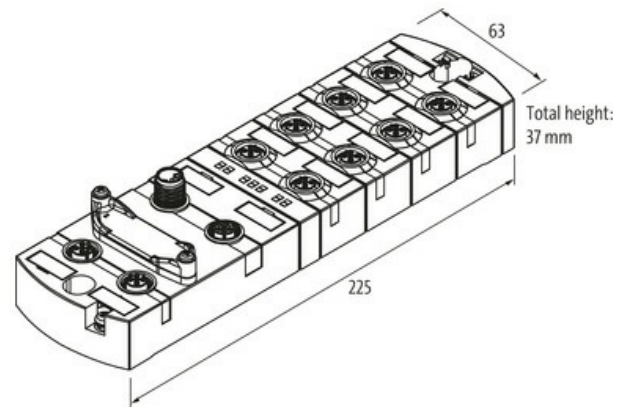

Product may differ from Image



#### Technical Data

Operating voltage	9...36 V
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

#### General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67
Dimensions H×W×D	37×63×225 mm

#### Connections

The information in this brochure has been compiled with the utmost care.  
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Fieldbus	10× M12 (female), D-coded
Supply	2× M12 Power, 4-pole, L-coded, 2× max. 16 A
<b>PROFINET</b>	
Specification	V2.4, Conformance Class B
Addressing	DCP
FSU (Fast-Start-Up)	no
PROFINET Netload Class	III
MRP	yes
Shared Device	no
<b>Switch Management</b>	
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Websserver	HTTP, HTTPS
Switch Form	PROFINET - Managed Switch
<b>Diagnostic</b>	
Communication status	via LED, LLDP
Monitoring - no voltage	yes
<b>Commercial data</b>	
country of origin	DE
customs tariff number	85176200
EAN	4048879866262
Packaging unit	1.000