


MIRO 6.2 OPTO-COUPLER MODULE

IN: 230 VAC/DC - OUT: 253 VAC/DC / 0,5 A

Multi voltage output
Transistor 0.5 A
24...230 V AC/DC
Spring clamp terminals

[Link to Product](#)

Illustration

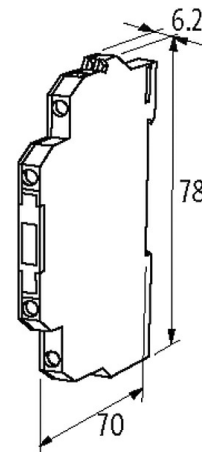

Product may differ from Image

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

Leakage current (output is open)	max. 20 µA
Switching time ON/OFF	5/15 ms
Saturation voltage (across output)	max. 2.6 V AC/DC
Switching voltage	10...230 V AC/DC
Switching frequency	max. 2.5 Hz
Switching current per output	1 mA...0.5 A

Input

Control current	5 mA
Voltage range OFF	0...5 V AC/DC
Voltage range ON	10...230 V AC/DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021654
eClass	27371601
Packaging unit	1.000