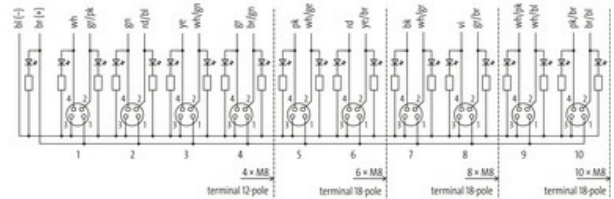


**EXACT8, 10XM8, 4 POLE MOULDED CABLE**



10.0m PUR/PVC 20x0,34+2x0,75

PUR/PVC


10.0 m

[Link to Product](#)**Illustration**

M8-Females 4-pole



for 2 signals per port

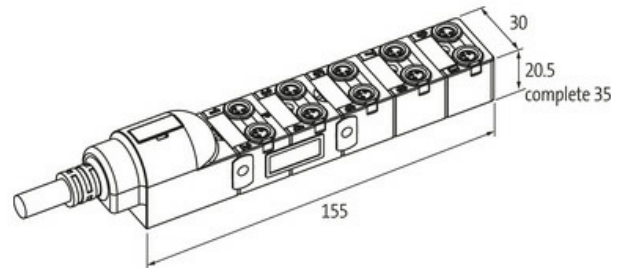

Product may differ from Image

**Form**

Form 80110

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Locking of ports	Screw thread (M8x1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 8 A

**General data**

Temperature range -20...+80 °C, depending on cable quality

**Cables**No./diameter of wires 20 x 0.34 + 2 x 0.75 mm<sup>2</sup>

Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	10.4 mm ±5%
Cable number	412
Jacket Color	gray
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC

#### Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

#### Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879056663
eClass	27279219
Packaging unit	1.000