

EXACT12 SAFETY, GRUNDMODUL P1-4: M12, 5 POLE LED

P5-8: M12 3-pol. 1:1, no LED


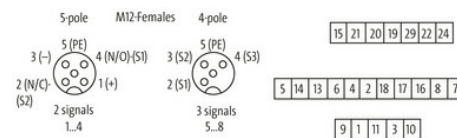
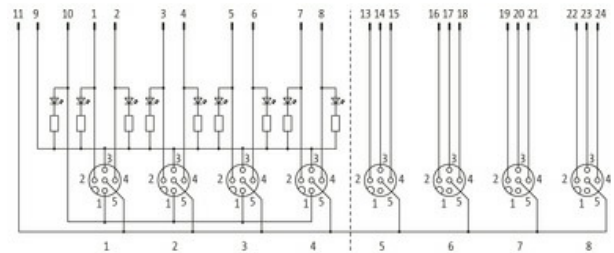
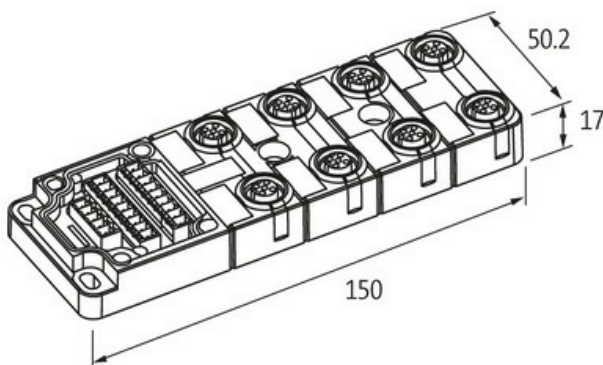
5-pole (port.1...4)

4-pole (port 5...8)

with LED for digital PNP-signals 24 V DC (port 1...4)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 8 A

General data

Temperature range	-20...+60 °C
-------------------	--------------

Commercial data

country of origin	DE
-------------------	----

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

customs tariff number	85369010
EAN	4048879315616
eClass	27143423
Packaging unit	1.000