

**EXACT12, 8XM12, 5 POL.**

Backside plug. spring terminals

5-pole

pluggable rear connection

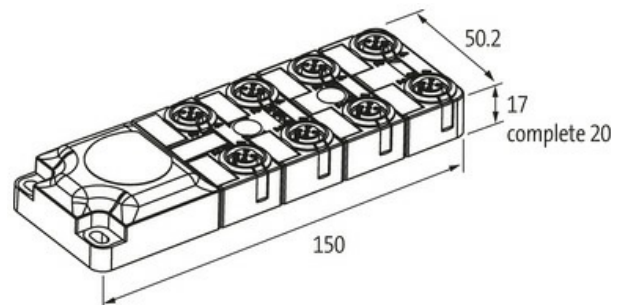
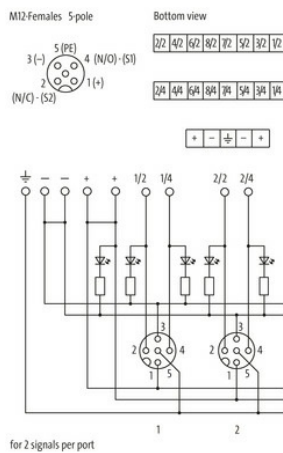
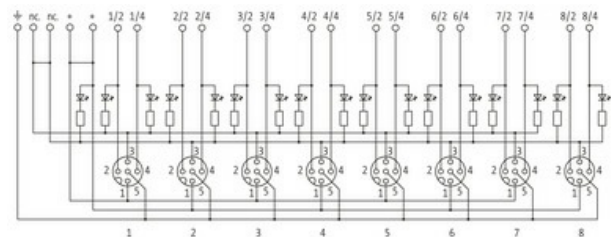
Spring clamp plug-in terminals

with LED for digital PNP-signals 24 V DC

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

flat gasket included

**[Link to Product](#)****Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 2 × 8 A

**General data**

Temperature range	-20...+70 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)

**Commercial data**

country of origin	DE
customs tariff number	85369010
EAN	4048879311205
eClass	27143423
Packaging unit	1.000