

M12 MALE ON REAR OF MSUD VALVE PLUG FORM BI 11MM

Form BI (11 mm) – M12, connector at the rear

max. 125 V AC/DC

without components


3-pole

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)


Illustration

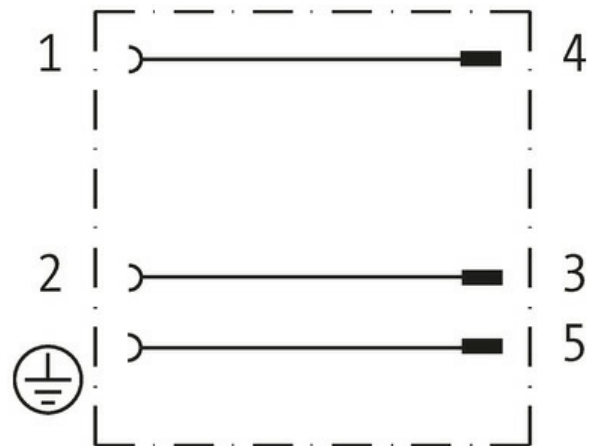

Female

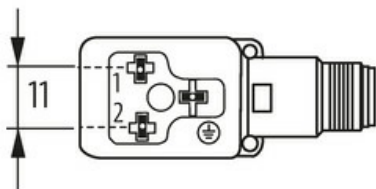

Male

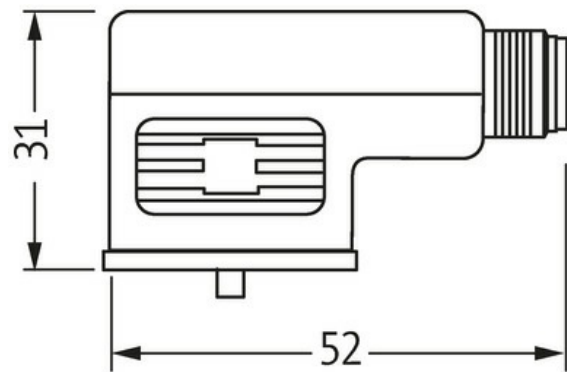

Depth: 22 mm

Product may differ from Image



Form

Form 42041

Technical Data

Operating voltage max. 125 V AC/DC

Rated surge voltage 1.5 kV

Operating current per contact max. 4 A

Material group	IEC 60664-1, category I
Coding	M12, A-coded
LED display	no
Locking of ports	M3/M12×1 mm (recommended torque 0.4/0.6 Nm)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Steel (galvanized)
Configuration	2 contacts + PE

General data

Mounting method	inserted, tightened
Pollution Degree	3
Temperature range	-25...+85 °C

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879143295
eClass	27143423
Packaging unit	1.000