

SAFETY WIRING SYSTEM

Distributor Box

8-way distribution box
without electrical feedback




Replaces identical product (Art.No. 27057)

Plastic housings with good resistance against chemicals and oils.





The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

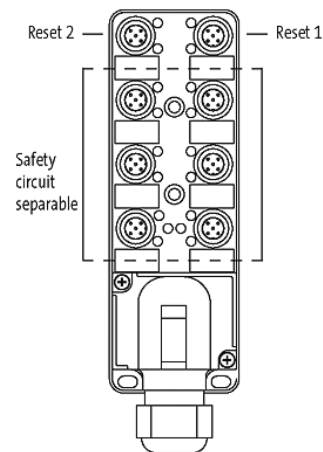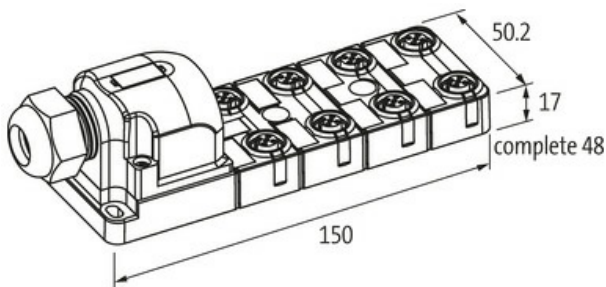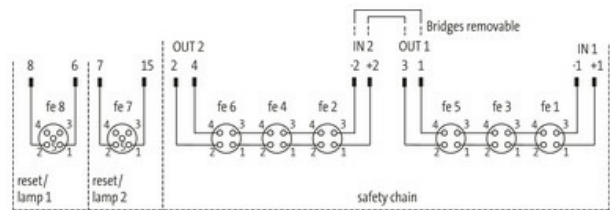

M12-Females

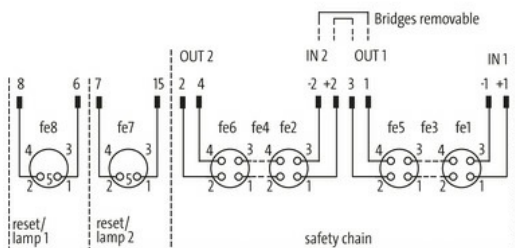

Product may differ from Image

Technical Data

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Operating voltage	24 V DC (EN 61131-2)
Material group	EN 60664-1 over voltage, category III
Locking of ports	Screw thread (M12×1 mm)
Operating current (black females)	max. per 1 A
Operating current (chain)	max. per 1 A
Isolation resistance	min. 1000 MΩ

General data

Temperature range	-20...+80 °C
Protection	IP67 inserted and tightened (EN 60529)

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879353380
eClass	27143423
Packaging unit	1.000