

M12 male 0° field-wireable C-Cod.

Male straight


M12, 3-pole

Sealing range (cable Ø): 4...6 mm



Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

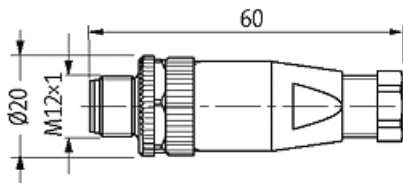[Link to Product](#)**Illustration**

Male

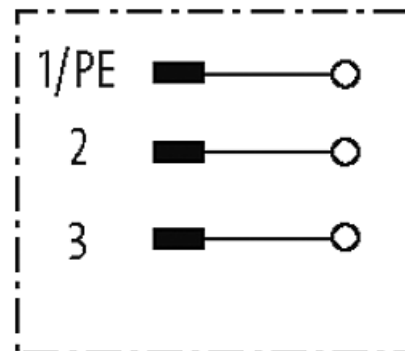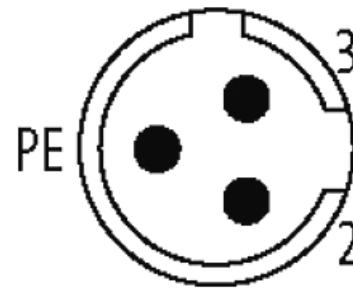

Product may differ from Image



* only for products with UL/CSA approved cable

Form

Form 20041

Technical Data

Operating voltage	max. 250 V AC/DC
Rated surge voltage	2.5 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category II
Connection cross section	max. 0.75 mm ²
Coding	M12, C-coded
Sealing range (cable Ø)	4...6 mm
Protection	IP67 inserted and tightened (EN 60529)

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Material PA

General data

Pollution Degree	3
Dimensions H×W×D	62×20×20 mm
Temperature range	-25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879641975
eClass	27279221
Packaging unit	1