

**MOSA 7/8" FEMALE 0° FIELD-WIREABLE (IDC)**5-pol., 0,75-1,50mm<sup>2</sup>

Female straight

7/8" (5-pole)

IDC terminals




Connection cross section: 0.75...1.5 mm<sup>2</sup>

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Female

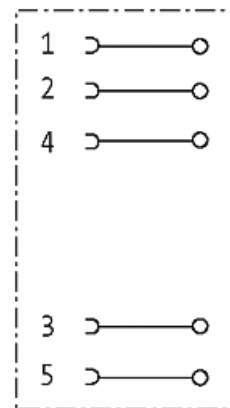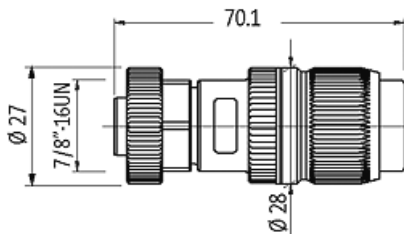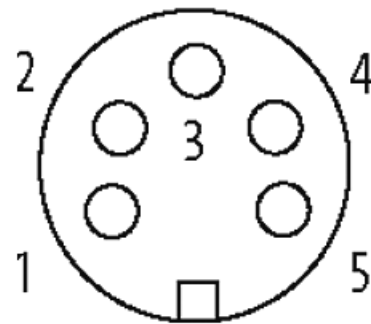

Product may differ from Image

**Form**

Form 78211

**Technical Data**

Operating voltage	max. 230/400 V AC/DC
Rated surge voltage	4.0 kV
Operating current per contact	max. 10 A
Material group	IEC 60664-1, category I
Connection cross section	0.75...1.5 mm <sup>2</sup> (conductor diameter min. 0.15 mm)
Coding	A-coded, 5-pole
Sealing range (cable Ø)	6.8...9.5 mm
Wire isolation	PVC, PP, TPE
Outer wire Ø	max. 2.8 mm

Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	Brass

**General data**

Pollution Degree	3
Temperature range	-40...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879134729
eClass	27279218
Packaging unit	1