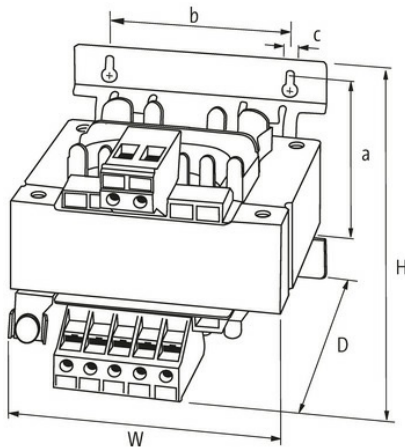
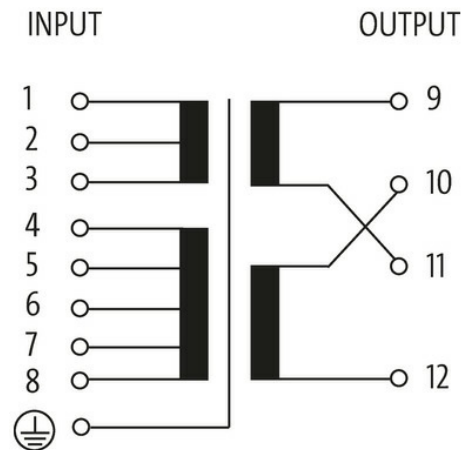


MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 2500VA IN: 208...550VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
 2500 VA
 Isolation class T 40/B
 Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	18×10 mm
Fixing centers a×b×c	130×150×10 mm

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 200×195×217 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC

Output rating 2500 VA

Input

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC

Inrush current 363 A (208 V AC); 137 A (550 V AC)

Short-circuit current 670 A (208 V AC); 254 A (550 V AC)

Input current 12.5 A (208 V AC); 4.72 A (550 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043200

EAN 4048879078696

eClass 27031302

Packaging unit 1.000