

AUXILIARY SWITCH CHANGEOVER CONTACTS  
TYPE HQ (7MM) ACCESSORY FOR 3VA1/2-  
BREAKER



Model		
product brandname		SENTRON
Product designation		auxiliary switch
General technical data		
Thermal current	A	6
Overvoltage category		III
Voltage		
Insulation voltage / rated value	V	690
Surge voltage resistance / rated value	kV	4
<b>Operating voltage</b>		
• at AC / at 50 Hz / rated value / minimum	V	240
• at DC / rated value / minimum	V	250
<b>Wire stripping length</b>	mm	15
Connectable conductor cross-section / maximum	mm <sup>2</sup>	1.5
Tightening torque / with screw-type terminals / maximum	N·m	0.5
<b>Height</b>	mm	56
<b>Width</b>		

• Note		1 slot (7 mm)
Depth	mm	30
Net weight	g	30
Degree of pollution		3

General Product Approval	Declaration of Conformity	Test Certificates	other
--------------------------	---------------------------	-------------------	-------



[Typprüfbescheinigung/Werkszeugnis](#)

[sonstig](#)

### Further information

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9988-0AA12>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA9988-0AA12/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=3VA9988-0AA12](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3VA9988-0AA12)

#### CAX-Online-Generator


<http://www.siemens.com/cax>

#### Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

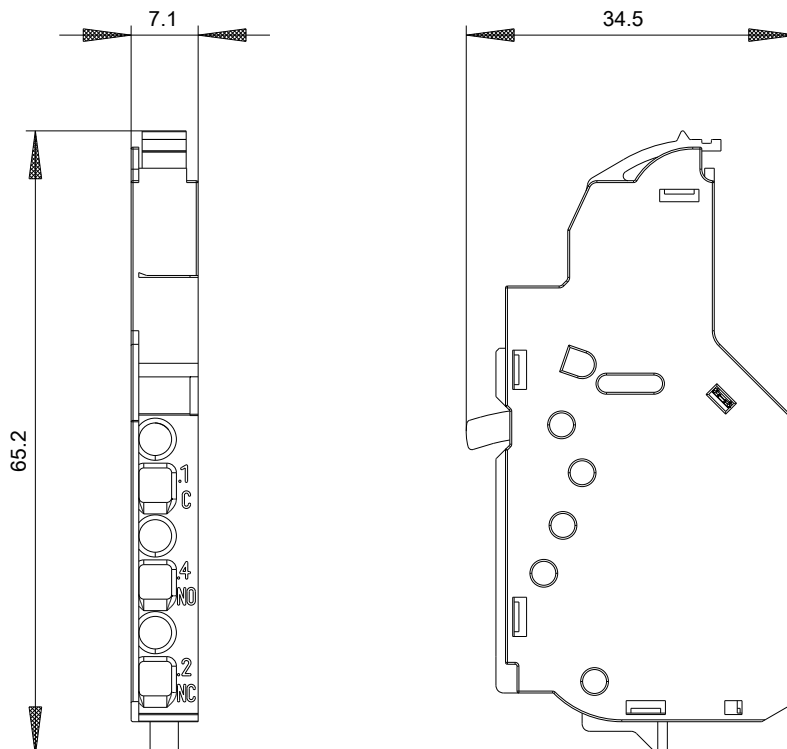

AUX

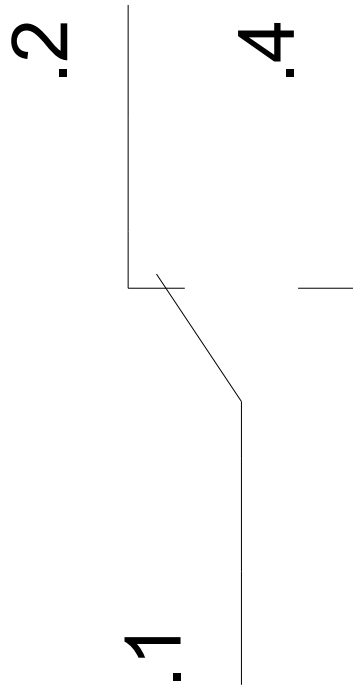

last modified:

10/14/2016