

CONTACTOR, AC-3, 5.5KW/400V, 2NO+2NC, AC 230V 50/60HZ, 3-POLE, SZ S0 SPRING-LOADED TERMINAL REMOVABLE AUX. SWITCH



|   |                |
|---|----------------|
| product brandname                                   | SIRIUS         |
| Product designation                                 | 3RT2 contactor |
| <b>General technical data</b>                       |                |
| Size of contactor                                   | S0             |
| Product extension                                   |                |
| • function module for communication                 | No             |
| • Auxiliary switch                                  | No             |
| Insulation voltage                                  |                |
| • rated value                                       | 690 V          |
| Degree of pollution                                 | 3              |
| Surge voltage resistance rated value                | 6 kV           |
| maximum permissible voltage for safe isolation      |                |
| • between coil and main contacts acc. to EN 60947-1 | 400 V          |
| Protection class IP                                 |                |
| • on the front                                      | IP20           |
| • of the terminal                                   | IP20           |
| Shock resistance                                    |                |
| • at rectangular impulse                            |                |

|   |                            |
|---|----------------------------|
| — at AC   | 7,5g / 5 ms, 4,7g / 10 ms  |
| • with sine pulse   |                            |
| — at AC   | 11,8g / 5 ms, 7,4g / 10 ms |
| <b>Mechanical service life (switching cycles)</b>                                   |                            |
| • of contactor typical  | 10 000 000                 |
| • of the contactor with added electronics-compatible auxiliary switch block typical | 5 000 000                  |
| • of the contactor with added auxiliary switch block typical                        | 10 000 000                 |

|  |                |
|--|----------------|
| <b>Ambient conditions</b>                                      |                |
| <b>Installation altitude at height above sea level maximum</b> | 2 000 m        |
| <b>Ambient temperature</b>                                     |                |
| • during operation   | -25 ... +60 °C |
| • during storage   | -55 ... +80 °C |

|  |                    |
|--|--------------------|
| <b>Main circuit</b>  |                    |
| <b>Number of poles for main current circuit</b>                      | 3                  |
| <b>Number of NO contacts for main contacts</b>                       | 3                  |
| <b>Number of NC contacts for main contacts</b>                       | 0                  |
| <b>Operating voltage</b>   |                    |
| • at AC-3 rated value maximum  | 690 V              |
| <b>Operating current</b>   |                    |
| • at AC-1 at 400 V   |                    |
| — at ambient temperature 40 °C rated value                           | 40 A               |
| • at AC-1  |                    |
| — up to 690 V at ambient temperature 40 °C rated value               | 40 A               |
| — up to 690 V at ambient temperature 60 °C rated value               | 35 A               |
| • at AC-2 at 400 V rated value                                       | 12 A               |
| • at AC-3  |                    |
| — at 400 V rated value   | 12 A               |
| — at 500 V rated value   | 12 A               |
| — at 690 V rated value   | 9 A                |
| <b>Connectable conductor cross-section in main circuit at AC-1</b>   |                    |
| • at 60 °C minimum permissible                                       | 10 mm <sup>2</sup> |
| • at 40 °C minimum permissible                                       | 10 mm <sup>2</sup> |
| <b>Operating current for approx. 200000 operating cycles at AC-4</b> |                    |
| • at 400 V rated value   | 5.5 A              |
| • at 690 V rated value   | 5.5 A              |

|  |  |
|--|--|
| <b>Operating current</b>   |  |
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 3 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>                         | <p>35 A</p> <p>4.5 A</p> <p>1 A</p> <p>0.4 A</p> <p>0.25 A</p> <p>35 A</p> <p>35 A</p> <p>5 A</p> <p>1 A</p> <p>0.8 A</p> <p>35 A</p> <p>35 A</p> <p>35 A</p> <p>2.9 A</p> <p>1.4 A</p>      |
| <b>Operating current</b>   |  |
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 24 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 24 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul> | <p>20 A</p> <p>2.5 A</p> <p>1 A</p> <p>0.09 A</p> <p>0.06 A</p> <p>15 A</p> <p>3 A</p> <p>35 A</p> <p>0.27 A</p> <p>0.16 A</p> <p>35 A</p> <p>10 A</p> <p>35 A</p> <p>0.6 A</p> <p>0.6 A</p> |
| <b>Operating power</b>   |  |
| <ul style="list-style-type: none"> <li>• at AC-1 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> </ul> </li> </ul>  | <p>13.3 kW</p>   |

|   |              |
|---|--------------|
| — at 230 V at 60 °C rated value   | 13.3 kW      |
| — at 400 V rated value  | 23 kW        |
| — at 400 V at 60 °C rated value   | 23 kW        |
| — at 690 V rated value  | 40 kW        |
| — at 690 V at 60 °C rated value   | 40 kW        |
| • at AC-2 at 400 V rated value  | 5.5 kW       |
| • at AC-3   |              |
| — at 230 V rated value  | 3 kW         |
| — at 400 V rated value  | 5.5 kW       |
| — at 690 V rated value  | 7.5 kW       |
| <b>Operating power for approx. 200000 operating cycles at AC-4</b>                            |              |
| • at 400 V rated value  | 2.6 kW       |
| • at 690 V rated value  | 4.6 kW       |
| <b>Thermal short-time current limited to 10 s</b>   | 110 A        |
| <b>Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor</b> | 0.5 W        |
| <b>No-load switching frequency</b>  |              |
| • at AC   | 5 000 1/h    |
| <b>Operating frequency</b>  |              |
| • at AC-1 maximum   | 1 000 1/h    |
| • at AC-2 maximum   | 1 000 1/h    |
| • at AC-3 maximum   | 1 000 1/h    |
| • at AC-4 maximum   | 300 1/h      |
| <b>Control circuit/ Control</b>   |              |
| <b>Type of voltage of the control supply voltage</b>  | AC           |
| <b>Control supply voltage at AC</b>   |              |
| • at 50 Hz rated value  | 230 V        |
| • at 60 Hz rated value  | 230 V        |
| <b>Operating range factor control supply voltage rated value of magnet coil at AC</b>         |              |
| • at 50 Hz  | 0.8 ... 1.1  |
| • at 60 Hz  | 0.85 ... 1.1 |
| <b>Apparent pick-up power of magnet coil at AC</b>  |              |
| • at 50 Hz  | 68 V·A       |
| • at 60 Hz  | 67 V·A       |
| <b>Inductive power factor with closing power of the coil</b>                                  |              |
| • at 50 Hz  | 0.72         |
| • at 60 Hz  | 0.74         |
| <b>Apparent holding power of magnet coil at AC</b>  |              |
| • at 50 Hz  | 7.9 V·A      |
| • at 60 Hz  | 6.5 V·A      |

|  |              |
|--|--------------|
| <b>Inductive power factor with the holding power of the coil</b>             |              |
| • at 50 Hz   | 0.25         |
| • at 60 Hz   | 0.28         |
| <b>Closing delay</b>   |              |
| • at AC  | 9 ... 38 ms  |
| <b>Opening delay</b>   |              |
| • at AC  | 4 ... 16 ms  |
| <b>Arcing time</b>   | 10 ... 10 ms |
| <b>Residual current of the electronics for control with signal &lt;0&gt;</b> |              |
| • at AC at 230 V maximum permissible   | 6 mA         |
| • at DC at 24 V maximum permissible  | 16 mA        |

### Auxiliary circuit

|                                    |        |
|------------------------------------|--------|
| <b>Number of NC contacts</b>       |        |
| • for auxiliary contacts           |        |
| — instantaneous contact            | 2      |
| <b>Number of NO contacts</b>       |        |
| • for auxiliary contacts           |        |
| — instantaneous contact            | 2      |
| Operating current at AC-12 maximum | 10 A   |
| <b>Operating current at AC-15</b>  |        |
| • at 230 V rated value             | 6 A    |
| • at 400 V rated value             | 3 A    |
| • at 500 V rated value             | 2 A    |
| • at 690 V rated value             | 1 A    |
| <b>Operating current at DC-12</b>  |        |
| • at 24 V rated value              | 10 A   |
| • at 48 V rated value              | 6 A    |
| • at 60 V rated value              | 6 A    |
| • at 110 V rated value             | 3 A    |
| • at 125 V rated value             | 2 A    |
| • at 220 V rated value             | 1 A    |
| • at 600 V rated value             | 0.15 A |
| <b>Operating current at DC-13</b>  |        |
| • at 24 V rated value              | 6 A    |
| • at 48 V rated value              | 2 A    |
| • at 60 V rated value              | 2 A    |
| • at 110 V rated value             | 1 A    |
| • at 125 V rated value             | 0.9 A  |
| • at 220 V rated value             | 0.3 A  |
| • at 600 V rated value             | 0.1 A  |

|  |   |
|--|---|
| <b>Contact reliability of auxiliary contacts</b> | 1 faulty switching per 100 million (17 V, 1 mA) |
|--|---|

### UL/CSA ratings

|   |  |
|---|--|
| <b>Full-load current (FLA) for three-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | <p>11 A</p> <p>11 A</p>  |
| <b>Yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | <p>1 hp</p> <p>2 hp</p> <p>3 hp</p> <p>3 hp</p> <p>7.5 hp</p> <p>10 hp</p> |
| <b>Contact rating of auxiliary contacts according to UL</b>   | A600 / Q600  |

### Short-circuit protection

|   |   |
|---|---|
| <b>Design of the fuse link</b>  |   |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | <p>gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 63 A</p> <p>gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 25 A</p> <p>fuse gL/gG: 10 A</p> |

### Installation/ mounting/ dimensions

|  |  |
|--|--|
| <b>Mounting position</b>   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022   |
| <ul style="list-style-type: none"> <li>• Side-by-side mounting</li> </ul>  | Yes  |
| <b>Height</b>  | 102 mm   |
| <b>Width</b>   | 45 mm  |
| <b>Depth</b>   | 144 mm   |
| <b>Required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul> | <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p>  |

|                  |      |
|------------------|------|
| — Backwards      | 0 mm |
| — upwards        | 0 mm |
| — at the side    | 6 mm |
| — downwards      | 0 mm |
| • for live parts |      |
| — forwards       | 0 mm |
| — Backwards      | 0 mm |
| — upwards        | 0 mm |
| — downwards      | 0 mm |
| — at the side    | 6 mm |

## Connections/Terminals

|   |                                   |
|---|-----------------------------------|
| <b>Type of electrical connection</b>                |                                   |
| • for main current circuit                          | spring-loaded terminals           |
| • for auxiliary and control current circuit         | spring-loaded terminals           |
| <b>Type of connectable conductor cross-sections</b> |                                   |
| • for main contacts                                 |                                   |
| — solid   | 2x (1 ... 10 mm <sup>2</sup> )    |
| — single or multi-stranded                          | 2x (1 ... 10 mm <sup>2</sup> )    |
| — finely stranded with core end processing          | 2x (1 ... 6 mm <sup>2</sup> )     |
| — finely stranded without core end processing       | 2x (1 ... 6 mm <sup>2</sup> )     |
| • at AWG conductors for main contacts               | 2x (18 ... 8)                     |
| <b>Type of connectable conductor cross-sections</b> |                                   |
| • for auxiliary contacts                            |                                   |
| — single or multi-stranded                          | 2x (0,5 ... 2,5 mm <sup>2</sup> ) |
| — finely stranded with core end processing          | 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| — finely stranded without core end processing       | 2x (0.5 ... 2.5 mm <sup>2</sup> ) |
| • at AWG conductors for auxiliary contacts          | 2x (20 ... 14)                    |

## Safety related data

|   |           |
|---|-----------|
| <b>B10 value</b>                                    |           |
| • with high demand rate acc. to SN 31920            | 1 000 000 |
| <b>Proportion of dangerous failures</b>             |           |
| • with low demand rate acc. to SN 31920             | 40 %      |
| • with high demand rate acc. to SN 31920            | 73 %      |
| <b>Failure rate [FIT]</b>                           |           |
| • with low demand rate acc. to SN 31920             | 100 FIT   |
| <b>Product function</b>                             |           |
| • Mirror contact acc. to IEC 60947-4-1              | Yes       |
| • positively driven operation acc. to IEC 60947-5-1 | No        |

|  |             |
|--|-------------|
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y        |
| Protection against electrical shock                                | finger-safe |

Certificates/approvals

|                          |     |
|--------------------------|-----|
| General Product Approval | EMC |
|--------------------------|-----|



[KTL](#)



|                                       |                           |                   |                   |
|---------------------------------------|---------------------------|-------------------|-------------------|
| Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates | Shipping Approval |
|---------------------------------------|---------------------------|-------------------|-------------------|

[Baumusterbescheinigung](#)



[spezielle Prüfbescheinigungen](#)

[Typprüfbescheinigung/Werkszeugnis](#)



Shipping Approval



other

[Umweltbestätigung](#)

[Bestätigungen](#)



Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2024-2AL24>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2024-2AL24>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-2AL24>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2024-2AL24&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2024-2AL24&lang=en)

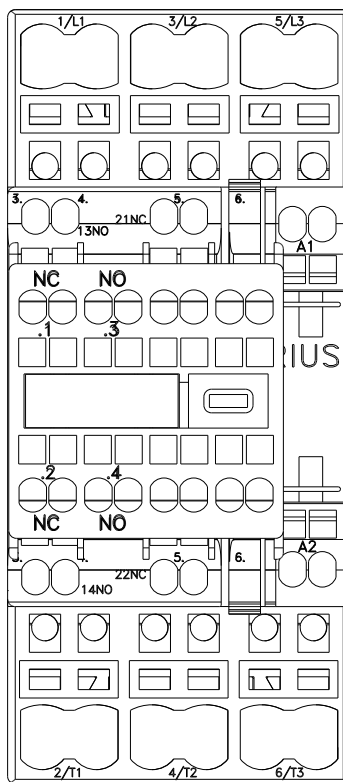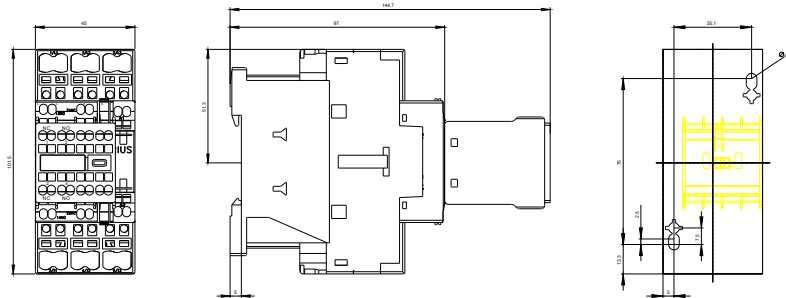

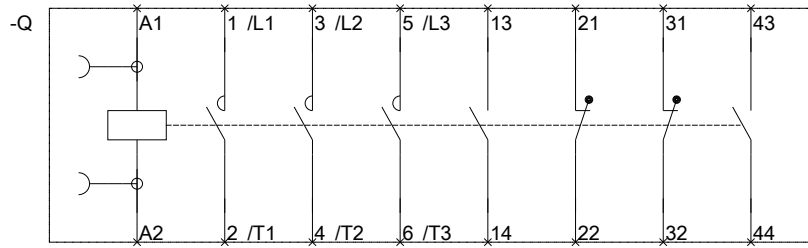

last modified:

10/19/2016