


3-phase busbar for 2 circuit breakers Size S2 Modular spacing: 55 mm Multi-unit packaging Pack = 20 units

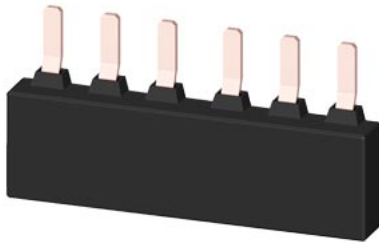

product category	Infeed systems
product designation	3-phase busbar
General technical data	
protection class IP on the front according to IEC 60529	IP20
thermal current	108 A
Substance Prohibittance (Date)	07/01/2006
Weight	0.134 kg
number of poles for main current circuit	3
operating voltage at AC rated value	690 V
operational current rated value	108 A

UL/CSA ratings	
operating voltage at AC according to UL rated value	600 V
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Approvals Certificates		
General Product Approval	Test Certificates	Marine / Shipping

[Confirmation](#)



[Special Test Certificate](#)



Marine / Shipping	other	Railway	Environment
-------------------	-------	---------	-------------



[Confirmation](#)

[Miscellaneous](#)



[Special Test Certificate](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1935-1A-Z X92>


Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1935-1A-Z X92>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1935-1A-Z X92>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

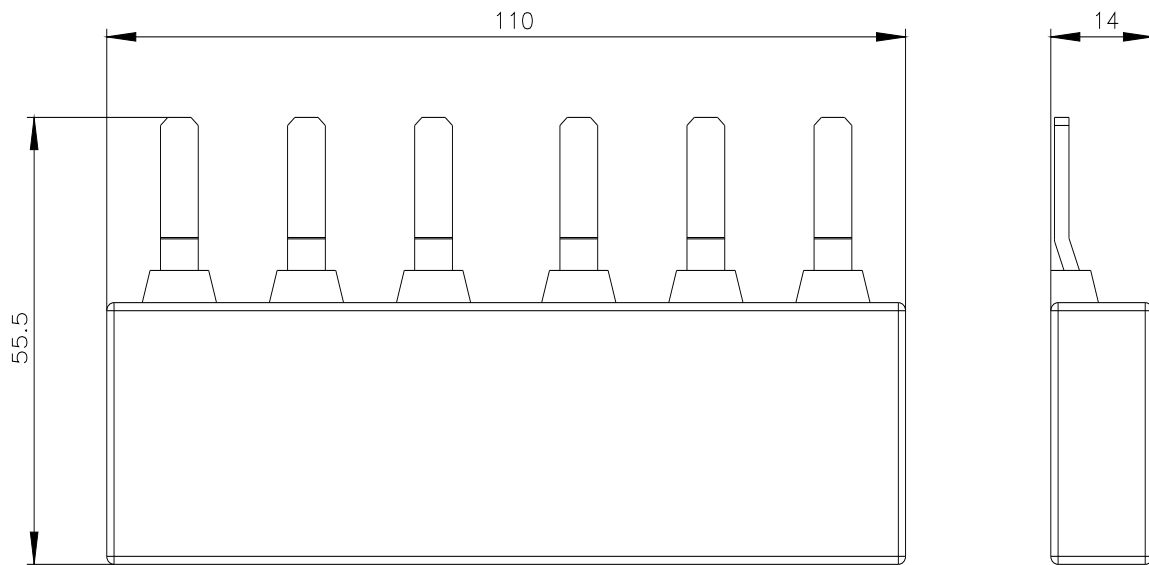

last modified:

1/10/2024 