



contactor relay railway 4 NO, 24-34 V DC, 0.7-1.25\*Us, with integrated varistor, spring-loaded terminal, frame size S00

|   |  |
|---|--|
| product brand name  | SIRIUS   |
| product designation   | Contactor relay for railway applications   |
| product type designation  | 3RH2   |
| <b>General technical data</b>   |  |
| size of contactor   | S00  |
| product extension auxiliary switch  | Yes  |
| power loss [W] for rated value of the current without load current share typical      | 0.95 W   |
| insulation voltage with degree of pollution 3 at AC rated value                       | 690 V  |
| surge voltage resistance rated value  | 6 kV   |
| shock resistance at rectangular impulse   |  |
| • at DC   | 10g / 5 ms, 5g / 10 ms   |
| shock resistance with sine pulse  |  |
| • at DC   | 15g / 5 ms, 8g / 10 ms   |
| mechanical service life (operating cycles)  |  |
| • of contactor typical  | 30 000 000   |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000  |
| • of the contactor with added auxiliary switch block typical                          | 10 000 000   |
| reference code according to IEC 81346-2   | K  |
| Substance Prohibitance (Date)   | 10/01/2009   |
| SVHC substance name   | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8<br>2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 |
| Weight  | 0.311 kg   |
| <b>Ambient conditions</b>   |  |
| installation altitude at height above sea level maximum                               | 2 000 m  |
| ambient temperature   |  |
| • during operation  | -40 ... +70 °C   |
| • during storage  | -55 ... +80 °C   |
| relative humidity minimum   | 10 %   |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum                        | 95 %   |
| <b>Environmental footprint</b>  |  |
| Environmental Product Declaration (EPD)   | Yes  |
| global warming potential [CO2 eq] total   | 133 kg   |
| global warming potential [CO2 eq] during manufacturing                                | 1.3 kg   |
| global warming potential [CO2 eq] during operation                                    | 132 kg   |
| global warming potential [CO2 eq] after end of life                                   | -0.227 kg  |
| <b>Main circuit</b>   |  |
| no-load switching frequency   |  |
| • at DC   | 1 500 1/h  |

| Control circuit/ Control  |              |
|---|--------------|
| type of voltage of the control supply voltage   | DC           |
| control supply voltage at DC rated value  | 24 ... 34 V  |
| operating range factor control supply voltage rated value of magnet coil at DC                    |              |
| • initial value   | 0.7          |
| • full-scale value  | 1.25         |
| design of the surge suppressor  | Varistor     |
| inrush current peak   | 2.3 A        |
| duration of inrush current peak   | 50 µs        |
| locked-rotor current mean value   | 0.18 A       |
| locked-rotor current peak   | 0.18 A       |
| duration of locked-rotor current  | 250 ms       |
| holding current mean value  | 40 mA        |
| closing power of magnet coil at DC  | 4 W          |
| holding power of magnet coil at DC  | 0.95 W       |
| closing delay   |              |
| • at DC   | 30 ... 70 ms |
| opening delay   |              |
| • at DC   | 25 ... 45 ms |
| arcing time   | 10 ... 15 ms |
| residual current of the electronics for control with signal <0> at DC at 24 V maximum permissible | 10 mA        |
| Auxiliary circuit   |              |
| number of NO contacts for auxiliary contacts  | 4            |
| • instantaneous contact   | 4            |
| identification number and letter for switching elements   | 40 E         |
| operational current at AC-12 maximum  | 10 A         |
| operational current at AC-15  |              |
| • at 230 V rated value  | 10 A         |
| • at 400 V rated value  | 3 A          |
| • at 500 V rated value  | 2 A          |
| • at 690 V rated value  | 1 A          |
| operational current at 1 current path at DC-12  |              |
| • at 24 V rated value   | 10 A         |
| • at 110 V rated value  | 3 A          |
| • at 220 V rated value  | 1 A          |
| • at 440 V rated value  | 0.3 A        |
| • at 600 V rated value  | 0.15 A       |
| operational current with 2 current paths in series at DC-12                                       |              |
| • at 24 V rated value   | 10 A         |
| • at 60 V rated value   | 10 A         |
| • at 110 V rated value  | 4 A          |
| • at 220 V rated value  | 2 A          |
| • at 440 V rated value  | 1.3 A        |
| • at 600 V rated value  | 0.65 A       |
| operational current with 3 current paths in series at DC-12                                       |              |
| • at 24 V rated value   | 10 A         |
| • at 60 V rated value   | 10 A         |
| • at 110 V rated value  | 10 A         |
| • at 220 V rated value  | 3.6 A        |
| • at 440 V rated value  | 2.5 A        |
| • at 600 V rated value  | 1.8 A        |
| operating frequency at DC-12 maximum  | 1 000 1/h    |
| operational current at 1 current path at DC-13  |              |
| • at 24 V rated value   | 10 A         |
| • at 110 V rated value  | 1 A          |
| • at 220 V rated value  | 0.3 A        |
| • at 440 V rated value  | 0.14 A       |
| • at 600 V rated value  | 0.1 A        |
| operational current with 2 current paths in series at DC-13                                       |              |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 10 A<br>3.5 A<br>1.3 A<br>0.9 A<br>0.2 A<br>0.1 A  |
| <b>operational current with 3 current paths in series at DC-13</b>  |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 10 A<br>4.7 A<br>3 A<br>1.2 A<br>0.5 A<br>0.26 A   |
| <b>operating frequency at DC-13 maximum</b>   | 1 000 1/h  |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)  |
| <b>UL/CSA ratings</b>   |  |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600  |
| <b>Short-circuit protection</b>   |  |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA   |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface, can be tilted forward and backward by +/- 22.5° on vertical mounting surface, standing, on horizontal mounting surface |
| fastening method side-by-side mounting  | Yes  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail   |
| <b>height</b>   | 70 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 73 mm  |
| <b>required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm  |
| <b>Connections/ Terminals</b>   |  |
| type of electrical connection for auxiliary and control circuit   | spring-loaded terminals  |
| <b>connectable conductor cross-section for auxiliary contacts</b>   |  |
| <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>  | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>  |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>   | 2x (0.5 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 12)  |
| AWG number as coded connectable conductor cross section for auxiliary contacts  | 20 ... 12  |
| <b>Safety related data</b>  |  |
| product function positively driven operation according to IEC 60947-5-1   | Yes  |

|  |  |
|--|--|
| <b>proportion of dangerous failures</b>                          |  |
| • with low demand rate according to SN 31920                     | 40 %   |
| • with high demand rate according to SN 31920                    | 73 %   |
| <b>B10 value with high demand rate according to SN 31920</b>     | 1 000 000  |
| IEC 61508  |  |
| <b>T1 value</b>  |  |
| • for proof test interval or service life according to IEC 61508 | 20 a   |
| Electrical Safety  |  |
| <b>protection class IP on the front according to IEC 60529</b>   | IP20   |
| <b>touch protection on the front according to IEC 60529</b>      | finger-safe, for vertical contact from the front |
| <b>Approvals Certificates</b>                                    |  |
| <b>General Product Approval</b>                                  | EMV  |



KC






| Functional Safety                            | Test Certificates                        | Maritime application                               |
|--|--|--|
| <a href="#">Type Examination Certificate</a> | <a href="#">Special Test Certificate</a> | <a href="#">Type Test Certificates/Test Report</a> |
|  |  |  |


| Maritime application | other  |
|----------------------|--|
|                      | <a href="#">Miscellaneous</a> <a href="#">Confirmation</a> |

| Railway                                  | Dangerous goods                       | Environment                                 |
|--|---------------------------------------|---|
| <a href="#">Special Test Certificate</a> | <a href="#">Transport Information</a> | <a href="#">Environmental Confirmations</a> |
|  |                                       |   |

#### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>  
Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2140-2XB40-0LA2>  
Cax online generator  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2140-2XB40-0LA2>  
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3RH2140-2XB40-0LA2>  
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2140-2XB40-0LA2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2140-2XB40-0LA2&lang=en)  
Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current  
<https://support.industry.siemens.com/cs/ww/en/ps/3RH2140-2XB40-0LA2/char>  
Further characteristics (e.g. electrical endurance, switching frequency)  
<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2140-2XB40-0LA2&objecttype=14&gridview=view1>

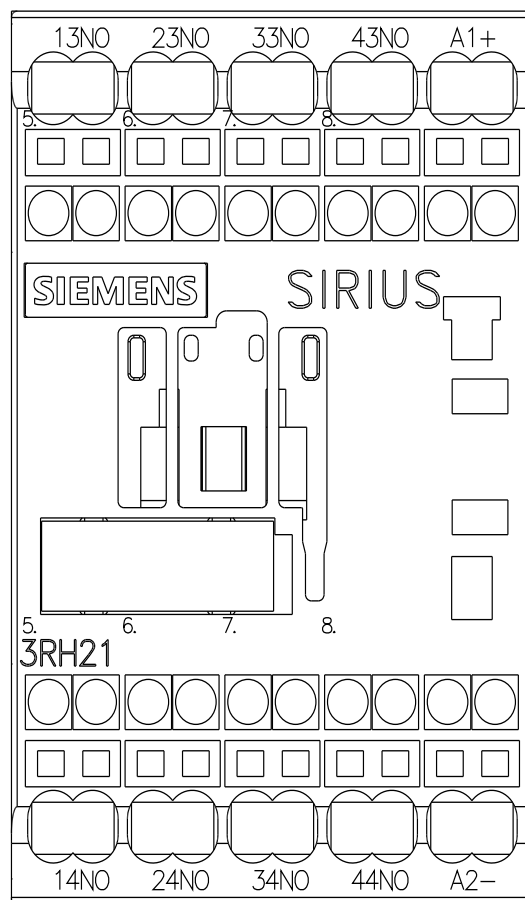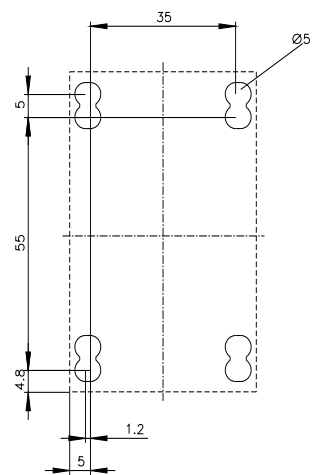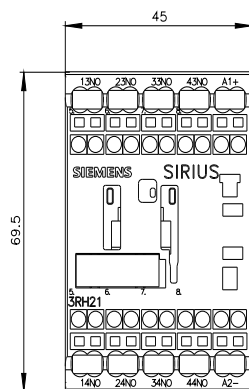

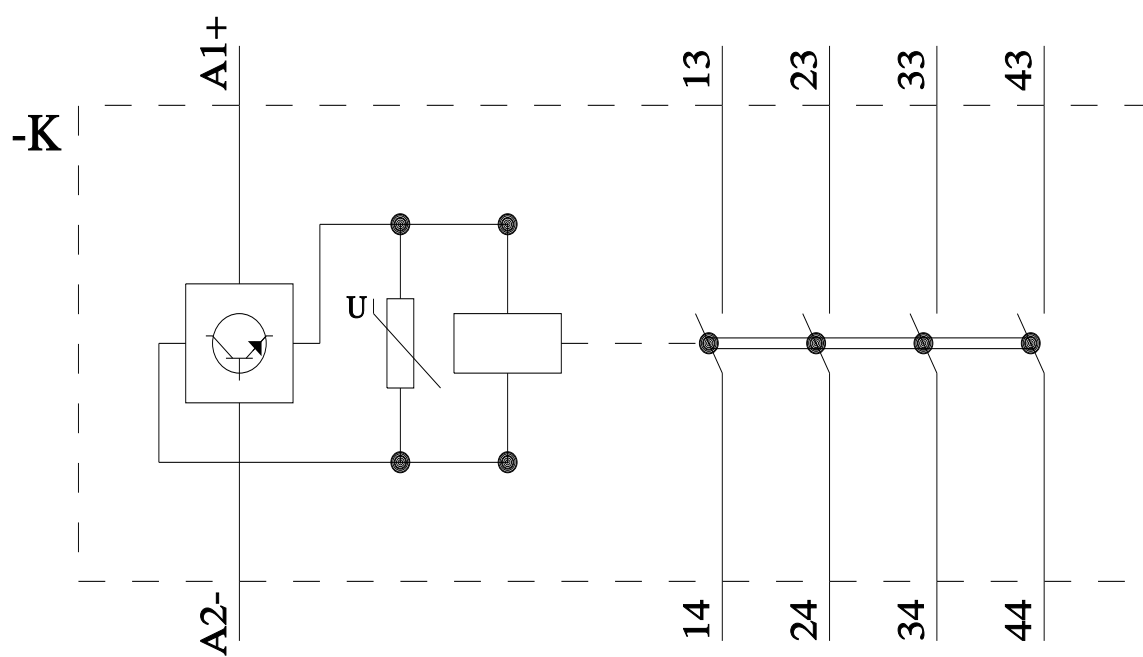

last modified:

4/11/2025 