


# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Multi-level fuse terminal block, with LED display for 30 ... 60 V AC/DC, lower level feed-through, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 60 V, nominal current: 30 A, connection method: Screw connection, 1 level, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.5 mm<sup>2</sup>- 6 mm<sup>2</sup>, 2nd level, mounting type: NS 35/7,5, NS 35/15, NS 32, color: dark gray

## Commercial data

Item number	3246777
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BEK234
Product key	BEK234
GTIN	4046356706339
Weight per piece (including packing)	34.6 g
Weight per piece (excluding packing)	34.6 g
Customs tariff number	85369095
Country of origin	PL

# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

## Technical data

### Notes

#### General

Note	The current is determined by the fuse used, the voltage by the fuse or selected light indicator.
------	--

### Product properties

Product type	Fuse terminal block
Number of connections	4
Number of rows	2

#### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Fuse type	Glass / ceramics / ...
Fuse	G / 5 x 20
LED voltage range	24 V AC ... 48 V AC
LED current range	0.7 mA ... 1.4 mA

### Input data

LED voltage range	24 V AC ... 48 V AC
-------------------	---------------------

### Connection data

Number of connections per level	2
Nominal cross section	4 mm <sup>2</sup>
Rated cross section AWG	10

#### 1 level

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	8 mm
Internal cylindrical gage	A3 B3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section AWG	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section, flexible [AWG]	20 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Flexible conductor cross-section (ferrule with plastic sleeve)	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>

# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

Cross-section with insertion bridge, rigid	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Cross-section with insertion bridge, flexible	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, solid	0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with the same cross-section AWG rigid	20 ... 16 (converted acc. to IEC)
2 conductors with same cross section, flexible	0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with the same cross-section AWG flexible	20 ... 16 (converted acc. to IEC)
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Nominal current	30 A
Maximum load current	30 A
Nominal voltage	60 V (the voltage is determined by the light indicator.)
Nominal cross section	4 mm <sup>2</sup>

## 2nd level

Maximum load current	6.3 A
	6.3 A (Upper level)

## Dimensions

Width	8.2 mm
Height	86.5 mm
Depth on NS 32	84 mm
Depth on NS 35/7,5	79 mm
Depth on NS 35/15	86.5 mm

## Material specifications

Color	dark gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

Short-time withstand current 4 mm <sup>2</sup>	0.48 kA
Result	Test passed

## Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Result	Test passed

### Test for conductor damage and slackening

Rotation speed	9 rpm
Revolutions	135
Conductor cross-section/weight	0.5 mm <sup>2</sup> / 0.3 kg
	4 mm <sup>2</sup> / 0.9 kg
	6 mm <sup>2</sup> / 1.4 kg
Result	Test passed

## Environmental and real-life conditions

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Long life test category 2, bogie-mounted
Frequency	f <sub>1</sub> = 5 Hz to f <sub>2</sub> = 150 Hz
ASD level	6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

Result	Test passed
--------	-------------

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32


# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block

3246777

<https://www.phoenixcontact.com/gb/products/3246777>

## Drawings

Circuit diagram

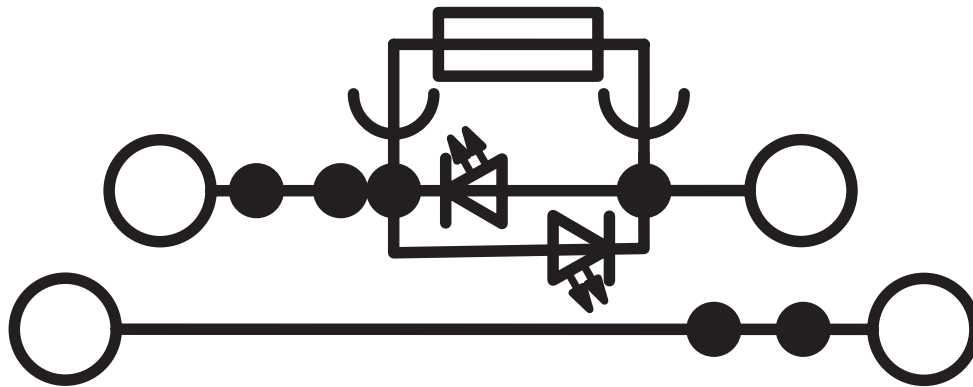

# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/3246777>



**EAC**

Approval ID: KZ7500651131219505



**cULus Recognized**

Approval ID: E60425

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
<b>B</b>				
upper level	600 V	6.3 A	20 - 10	-
lower level	600 V	30 A	20 - 10	-
<b>C</b>				
upper level	600 V	6.3 A	20 - 10	-
lower level	600 V	30 A	20 - 10	-

# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

## Classifications

### ECLASS

ECLASS-13.0	27250113
ECLASS-15.0	27250113

### ETIM

ETIM 9.0	EC000899
----------	----------

# TB 4-2L-HESILED 60 (5X20) I - Multi-level fuse terminal block



3246777

<https://www.phoenixcontact.com/gb/products/3246777>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)