

OPT-24DC/ 48DC/100 - Miniature solid-state relay



2966618

<https://www.phoenixcontact.com/gb/products/2966618>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in miniature solid-state relay, input solid-state relay, 1 N/O contact, input: 24 V DC, output: 3 - 48 V DC/100 mA

Your advantages

- Vibration and shock resistant
- RT III-proof (wash-proof)
- Wear-free and durable
- Zero voltage switch at AC output
- Can be soldered on PCB
- Switching power of up to 24 V DC/5 A

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2966618 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | DK69K1 |
| Product key | DK69K1 |
| GTIN | 4017918130466 |
| Weight per piece (including packing) | 4.83 g |
| Weight per piece (excluding packing) | 4.83 g |
| Customs tariff number | 85364110 |
| Country of origin | HU |

OPT-24DC/ 48DC/100 - Miniature solid-state relay



2966618

<https://www.phoenixcontact.com/gb/products/2966618>

Technical data

Product properties

| | |
|----------------|--------------------------|
| Product type | Single solid-state relay |
| Operating mode | 100% operating factor |

Insulation characteristics: Standards/regulations

| | |
|----------------------|------------------|
| Insulation | Basic insulation |
| Overvoltage category | III |
| Pollution degree | 2 |

Data management status

| | |
|------------------------------|------------|
| Date of last data management | 25.08.2025 |
|------------------------------|------------|

Electrical properties

| | |
|---|--------------------------------------|
| Maximum power dissipation for nominal condition | 0.17 W |
| Test voltage (Input/output) | 2.5 kV (50 Hz, 1 min., input/output) |

Input data

| | |
|--|-------------------------|
| Nominal input voltage U_N | 24 V DC |
| Input voltage range in reference to U_N | 0.8 ... 1.2 |
| Input voltage range | 19.2 V DC ... 28.8 V DC |
| Switching threshold "0" signal in reference to U_N | 0.4 |
| Switching threshold "1" signal in reference to U_N | 0.7 |
| Typical input current at U_N | 7 mA |
| Typical response time | 20 μ s (at U_N) |
| Typical turn-off time | 300 μ s (at U_N) |
| Transmission frequency | 300 Hz |

Output data

| | |
|--|---|
| Contact switching type | 1 N/O contact |
| Design of digital output | electronic |
| Output voltage range | 3 V DC ... 48 V DC |
| Limiting continuous current | 100 mA |
| Voltage drop at max. limiting continuous current | ≤ 1 V |
| Output circuit | 2-conductor, floating |
| Protective circuit | Reverse polarity protection Surge protection |

Dimensions

| | |
|--------|-------|
| Width | 5 mm |
| Height | 28 mm |
| Depth | 15 mm |

Material specifications

OPT-24DC/ 48DC/100 - Miniature solid-state relay



2966618

<https://www.phoenixcontact.com/gb/products/2966618>

| | |
|-------|------------------|
| Color | black (RAL 9005) |
|-------|------------------|

Environmental and real-life conditions

Ambient conditions

| | |
|---|------------------|
| Degree of protection | RT III |
| Ambient temperature (operation) | -25 °C ... 60 °C |
| Ambient temperature (storage/transport) | -25 °C ... 70 °C |

Approvals

Corrosive gas test

| | |
|----------------|----------------------------|
| Identification | ISA-S71.04. G3 Harsh Group |
| | EN 60068-2-60 |

Standards and regulations

Standards/regulations


| | |
|-----------------------|-----------|
| Standards/regulations | IEC 60664 |
| | EN 50178 |

Mounting


| | |
|-------------------|---------------------------|
| Assembly note | in rows with zero spacing |
| Mounting position | any |

Drawings

Circuit diagram

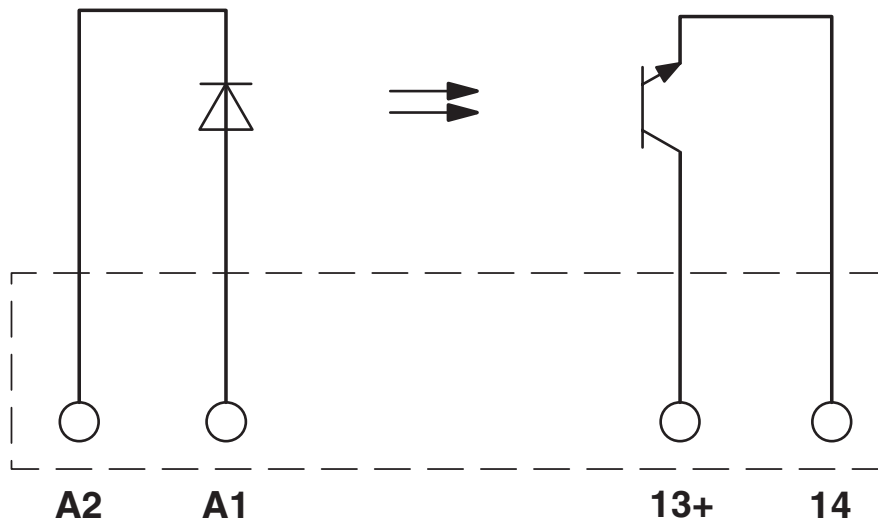

Drilling plan/solder pad geometry

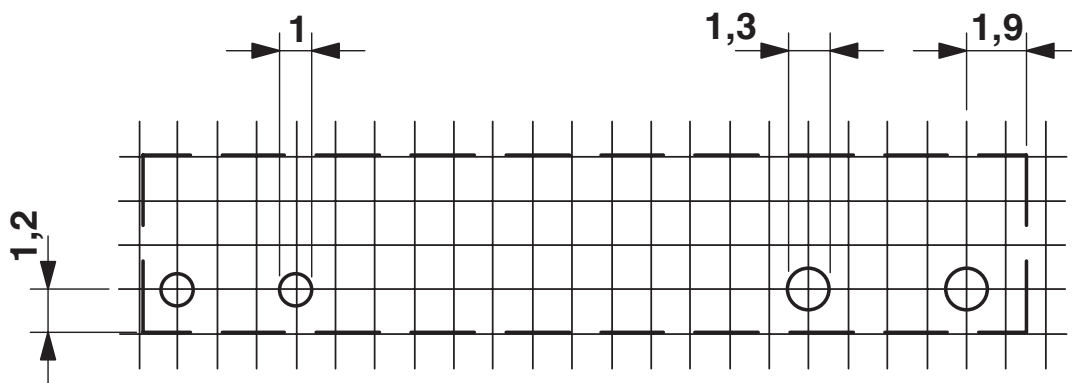

a = pitch division 1.25 mm and 1.27 mm

OPT-24DC/ 48DC/100 - Miniature solid-state relay



2966618

<https://www.phoenixcontact.com/gb/products/2966618>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2966618>



cUL Recognized
Approval ID: FILE E 195083



UL Recognized
Approval ID: FILE E 195083



EAC
Approval ID: RU*C-DE.*08.B.00010



UL Recognized
Approval ID: FILE E 195083



cUL Recognized
Approval ID: FILE E 195083



GL
Approval ID: 46016-03 HH

OPT-24DC/ 48DC/100 - Miniature solid-state relay



2966618

<https://www.phoenixcontact.com/gb/products/2966618>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27371604 |
| ECLASS-15.0 | 27371604 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001504 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

OPT-24DC/ 48DC/100 - Miniature solid-state relay



2966618

<https://www.phoenixcontact.com/gb/products/2966618>

Environmental product compliance

EU RoHS

| | |
|---|--------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(c)-I |

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

Halesfield 13, Telford

Shropshire, TF7 4PG

01952 681700

info@phoenixcontact.co.uk