

Non-automatic circuit breaker withdrawable version, with guide frame, IEC 60947-2, frame size 1, 3-poles, $I_n=800A$ up to 690V AC 50/60Hz, breaking capacity N $I_{cc}=55/42kA$ at 500/690V, without electr. trip unit ETU, rear connection horizontal, guide frame with shutter and w/o position signalling switch, without Com & metering function Manual operating mechanism with mechanical closing, without Spring charging motor, Ready-to-close signal. switch, Auxiliary switches 2NO+2NC, without Closing coil (CC), manual operating mechanism with mechanical closing, without Remote trip alarm reset coil (RR), without 2nd shunt trip, without 1st Shunt trip

Model	
product brand name	SENTRON
product designation	Non-automatic circuit breaker
suitability for use	AC non-automatic circuit breaker
size of the circuit-breaker	I
number of poles	3
position / of neutral conductor	no internal N-conductor
fastening method	withdrawable circuit breaker
design of the product	AC application
type of the driving mechanism	manual operating mechanism with mechanical or electrical closing
Weight	72.748 kg
Net Weight	57.748 kg
General technical data	
insulation voltage / rated value	1000 V
operating voltage / at AC / at 50/60 Hz / rated value	690 V
power loss [W] / maximum	85 W
Current	
continuous current / rated value / maximum	800 A
continuous current / rated value	800 A
operational current	
• at 40 °C / rated value	800 A
• at 45 °C / rated value	800 A
• at 50 °C / rated value	800 A
• at 55 °C / rated value	800 A
• at 60 °C / rated value	800 A
• at 65 °C / rated value	800 A
• at 70 °C / rated value	800 A
Switching capacity and short-time withstand current, according to IEC 60947-2	
switching capacity class of the circuit breaker	N
conditional short-circuit current (I_{cc}) / for non-automatic air circuit breakers	
• at AC / at 500 V / rated value	55 kA
• at AC / at 690 V / rated value	42 kA
Basic protection functions	
L: Overload protection N-conductor	
S: delayed short-circuit protection ST	
S: delayed short-circuit protection ST, settings values I0t	
S: delayed short-circuit protection ST, settings values I2t	
G: ground fault GF	
Measuring functions	

measurement function	
• current measurement	Yes
Communication	
communication function	No
Service Life	
mechanical service life (operating cycles)	
• without support / typical	15000
• with support / typical	30000
electrical endurance (operating cycles)	
• at 690 V / without support / typical	10000
• at 690 V / with support / typical	30000
Dimensions	
height	468 mm
width	320 mm
depth	471 mm
Main connection	
arrangement of electrical connectors / for main current circuit	main connection on the rear, horizontal
Auxiliary circuit	
design of the auxiliary switch	2 NO + 2 NC
number of NC contacts / for auxiliary contacts	2
number of NO contacts / for auxiliary contacts	2
number of CO contacts / for auxiliary contacts	0
Internal accessories	
product component	
• undervoltage release	No
• voltage trigger	No
• trip indicator	No
• motor drive	No
Environmental conditions	
protection class IP / on the front	IP20
ambient temperature / during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C
Certificates	
reference code	
• according to IEC 81346-2	Q

General Product Approval

EMV



Radio Equipment Type Approval Certificate

Test Certificates

[Miscellaneous](#)



[Miscellaneous](#)

[FCC](#)

[Miscellaneous](#)

[Special Test Certificate](#)

Maritime application

other



[Confirmation](#)



[Manufacturer Declaration](#)

[Transport Information](#)



Siemens
EcoTech



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA1108-2AA32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA1108-2AA32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA1108-2AA32-0AA0


CAX-Online-Generator

<http://www.siemens.com/cax>

Information- and Downloadcenter (catalogues, leaflets,...)

<http://www.siemens.com/energy-automation>

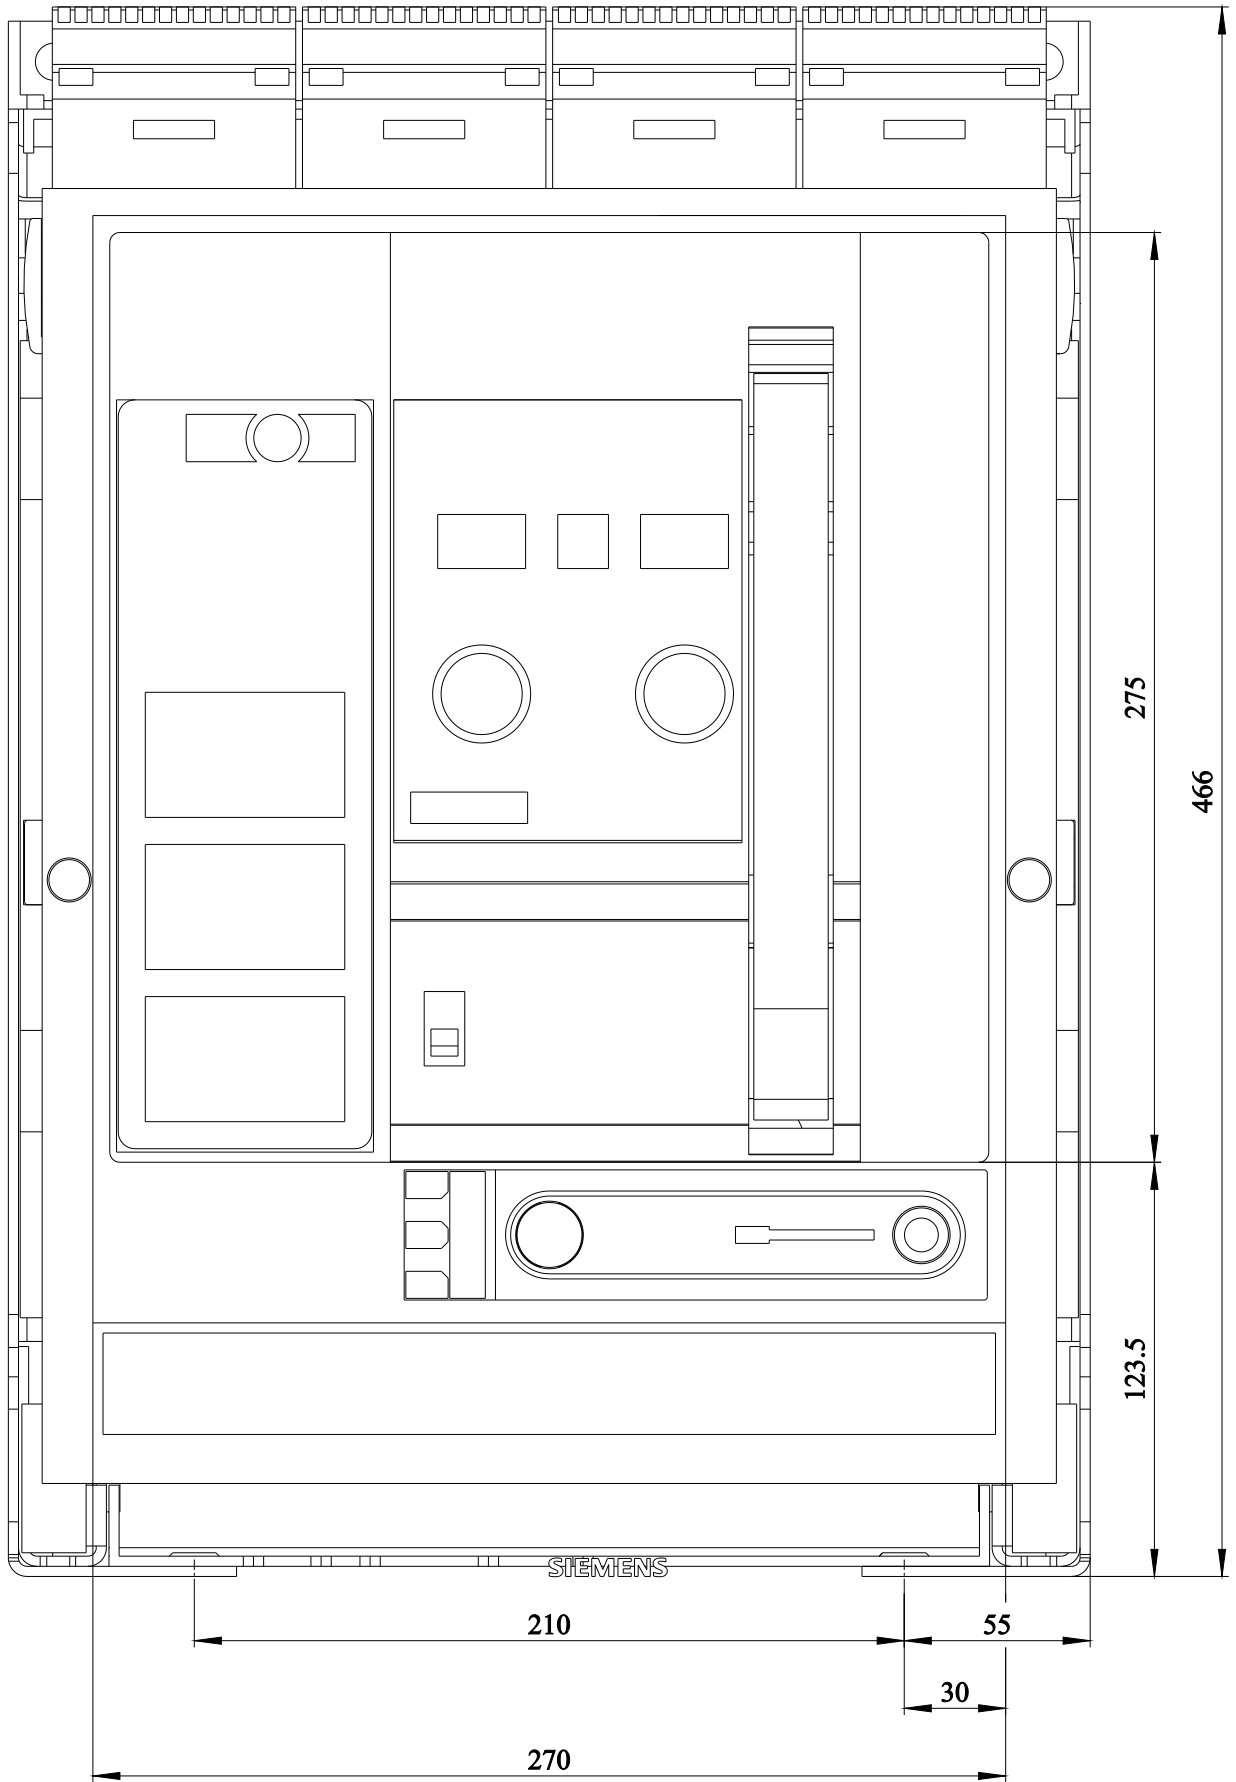

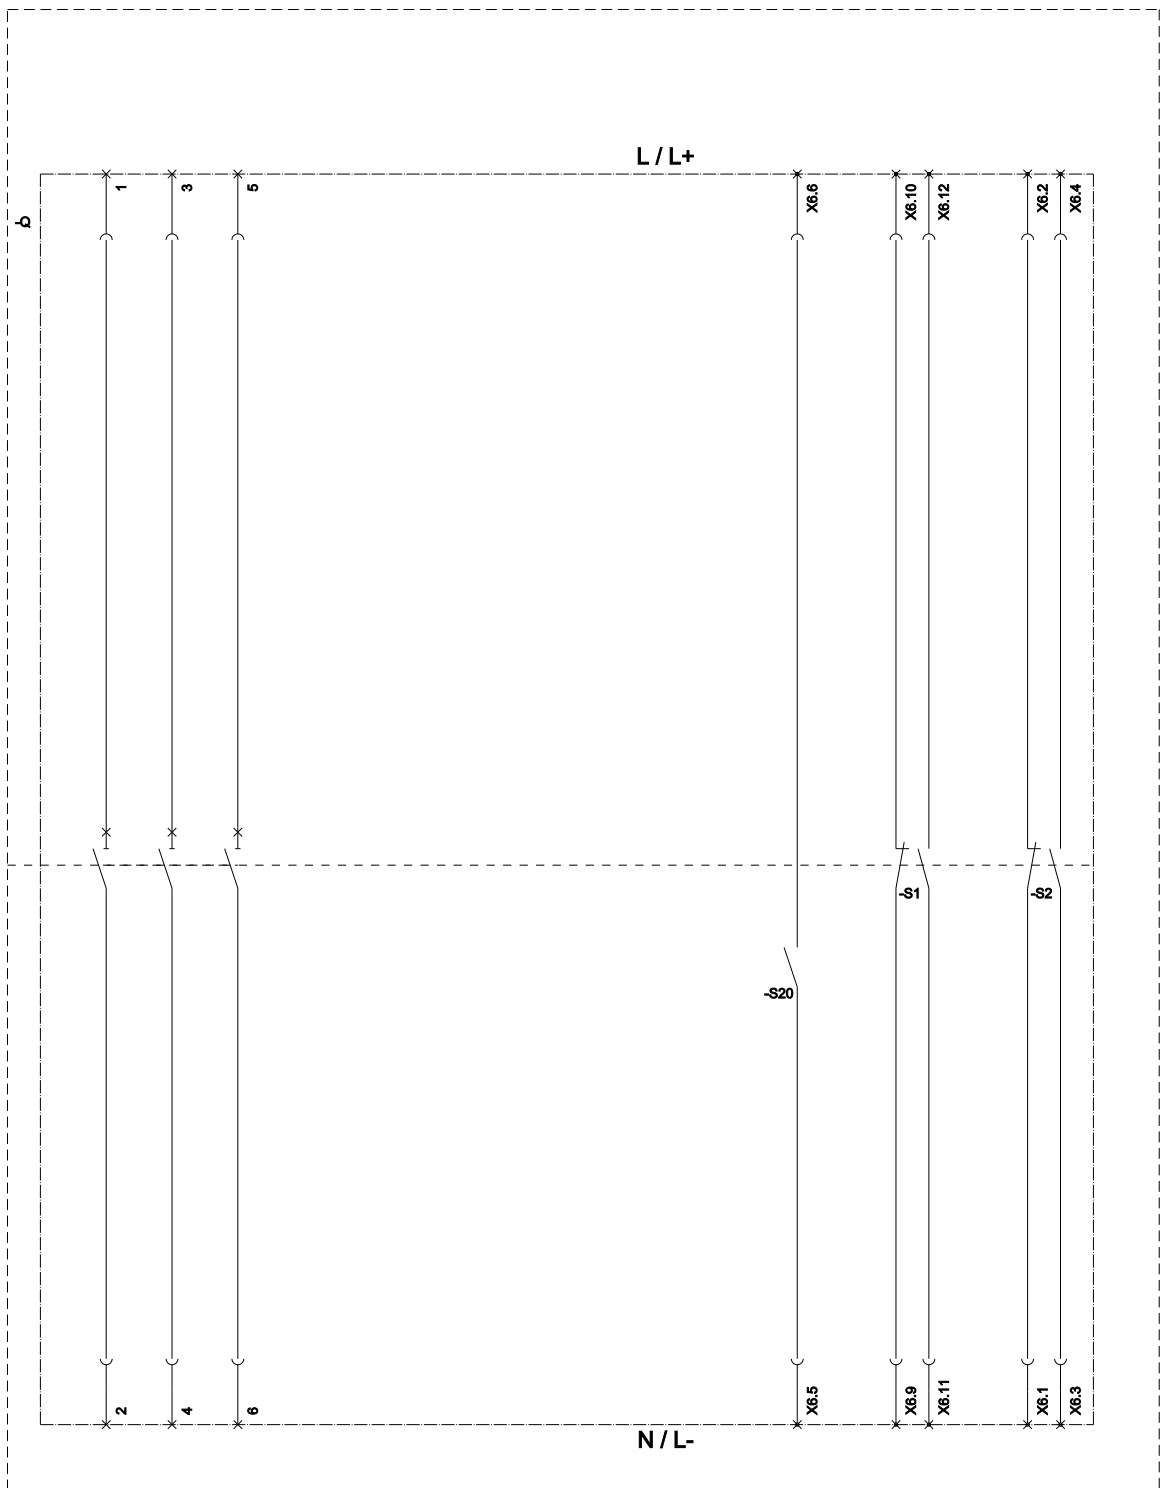

S1-S8 (AUX: Auxiliary switch / Hilfschalter); S20 (RTC: Ready to close signalling switch / Einschaltbereitschaftsmeldeshalter);
 PSS: position signaling switch module / Positionsmeldeshaltermodul;

last modified:

10/11/2023

