


Siemens  
EcoTech



Withdrawable circuit breaker without guide frame, IEC 60947-2, frame size 1, 3-poles,  $I_n=1600\text{A}$  up to 690V AC 50/60Hz, breaking capacity N  $I_{cu}=55/42\text{kA}$  at 500/690V, Trip unit ETU600 LSIG upgrade ready, color display, bluetooth and USB interface, Protection LT, ST, INST, GFx, N-protection required an external N-sensor, incl. trip alarm switch (1xCO), without Com & metering function Manual operating mechanism with mechanical closing, without Spring charging motor, Ready-to-close signal. switch, Auxiliary switches 4NO+4NC, without Closing coil (CC), manual operating mechanism with mechanical closing, without Remote trip alarm reset coil (RR), without 2nd shunt trip, without 1st Shunt trip

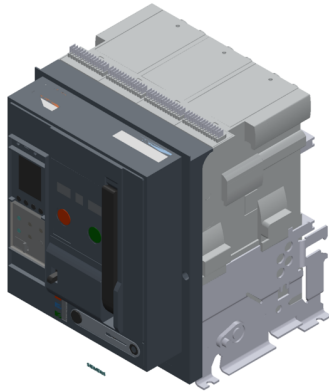

Model	
product brand name	SENTRON
product designation	Air circuit breaker
suitability for use	circuit breaker
size of the circuit-breaker	I
number of poles	3
position / of neutral conductor	no internal N-conductor
fastening method	withdrawable circuit breaker without guide frame
design of the product	AC application
type of the driving mechanism	manual operating mechanism with mechanical or electrical closing
design of the electronic trip unit	ETU600 LSIG
Weight	49.775 kg
Net Weight	34.775 kg
General technical data	
insulation voltage / rated value	1000 V
operating voltage / at AC / at 50/60 Hz / rated value	690 V
Current	
continuous current / rated value / maximum	1600 A
continuous current / rated value	1600 A
Switching capacity and short-time withstand current, according to IEC 60947-2	
switching capacity class of the circuit breaker	N
maximum short-circuit current breaking capacity ( $I_{cu}$ )	
• at 500 V / rated value	55 kA
• at 690 V / rated value	42 kA
operating short-circuit current breaking capacity ( $I_{cs}$ )	
• at 500 V / rated value	55 kA
• at 690 V / rated value	42 kA
short-circuit current making capacity ( $I_{cm}$ )	
• at 500 V / rated value	121 kA
• at 690 V / rated value	88 kA
short-time withstand current ( $I_{cw}$ ) / at 500 V AC	
• for 0.5 s / rated value	55 kA
• for 1 s / rated value	50 kA
• for 2 s / rated value	45 kA
• for 3 s / rated value	35 kA
short-time withstand current ( $I_{cw}$ ) / at 690 V AC	
• for 0.5 s / rated value	42 kA

<ul style="list-style-type: none"> <li>• for 1 s / rated value</li> </ul>	42 kA
<ul style="list-style-type: none"> <li>• for 2 s / rated value</li> </ul>	42 kA
<ul style="list-style-type: none"> <li>• for 3 s / rated value</li> </ul>	35 kA
<b>Electronic release unit</b>	
product feature	
<ul style="list-style-type: none"> <li>• upgradable</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Bluetooth and USB interface</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• decoder for basic protection functions</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• display and function keys</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• SENTRON powerconfig configuration software</li> </ul>	Yes
<b>Basic protection functions</b>	
product feature / for L-tripping	
<ul style="list-style-type: none"> <li>• can be switched on/off</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• selectable characteristic function</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable with eSet</li> </ul>	Yes
set values setting current (I <sub>r</sub> ) / for L-tripping / with I2t characteristic	0.5; 0.6; 0.7; 0.75; 0.8; 0.85; 0.9; 0.95; 1
reference value setting current (I <sub>r</sub> ) / for L-tripping / with I2t characteristic	x I <sub>n</sub>
set values delay time (t <sub>r</sub> ) / for L-tripping / with I2t characteristic	1;2;5;8;10;14;17;21;25
reference value delay time (t <sub>r</sub> ) / for L-tripping / with I2t characteristic	s
set values setting current (I <sub>r</sub> ) / for L-tripping / with I2t characteristic / for eSet	0.4-1;0.001
adjustable absolute value setting current (I <sub>r</sub> ) / for L-tripping / with I2t characteristic / for eSet	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	640 A
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	1600 A
set values delay time (t <sub>r</sub> ) / for L-tripping / with I2t characteristic / for eSet	0.5-30;0.001
set values setting current (I <sub>r</sub> ) / for L-tripping / with I4t characteristic / for eSet	0.4-1;0.001
set values delay time (t <sub>r</sub> ) / for L-tripping / with I4t characteristic / for eSet	0.5-5;0.001
adjustable absolute value setting current (I <sub>r</sub> ) / for L-tripping / with I4t characteristic / for eSet	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	640 A
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	1600 A
<b>L: Overload protection N-conductor</b>	
product feature / with neutral conductor protection / can be switched on/off	Yes
setting values setting current (I <sub>nN</sub> ) / for N-tripping	0.2-2;0.001
reference value setting current (I <sub>nN</sub> ) / for N-tripping	x I <sub>n</sub>
adjustable setting current (I <sub>nN</sub> ) / for N-tripping	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	320 A
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	3200 A
<b>S: delayed short-circuit protection ST</b>	
product feature / for S-tripping	
<ul style="list-style-type: none"> <li>• independent of direction / can be switched on/off</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• independent of direction / selectable characteristic function</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• decoder and infinite adjustability are selectable with eSet</li> </ul>	Yes
<b>S: delayed short-circuit protection ST, settings values I0t</b>	
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I0t characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I <sub>sd</sub> ) / for S-tripping / with I0t characteristic	x I <sub>r</sub>
set values delay time (t <sub>sd</sub> ) / for S-tripping / with I0t characteristic	0.08;0.15;0.22;0.3;0.4
reference value delay time (t <sub>sd</sub> ) / for S-tripping / with I0t characteristic	s
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I0t characteristic / for eSet / independent of direction	0.6-10;0.001
adjustable absolute value setting current (I <sub>sd</sub> )	
<ul style="list-style-type: none"> <li>• for S-tripping / with I0t characteristic / for eSet / independent of direction / minimum</li> </ul>	960 A

<ul style="list-style-type: none"> <li>at 500 V / for S-tripping / with I0t characteristic / for eSet / independent of direction / maximum</li> </ul>	40 kA
<ul style="list-style-type: none"> <li>at 690 V / for S-tripping / with I0t characteristic / for eSet / independent of direction / maximum</li> </ul>	33.6 kA
set values delay time (tsd) / for S-tripping / with I0t characteristic / for eSet / independent of direction	0.02-0.4;0.001
<b>S: delayed short-circuit protection ST, settings values I2t</b>	
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I2t characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I <sub>sd</sub> ) / for S-tripping / with I2t characteristic	x I <sub>r</sub>
set values delay time (tsd) / for S-tripping / with I2t characteristic	0.1;0.2;0.3;0.4
set values setting current (I <sub>sd</sub> ) / for S-tripping / with I2t characteristic / for eSet / independent of direction	0.6-10;0.001
adjustable absolute value setting current (I <sub>sd</sub> )	
<ul style="list-style-type: none"> <li>for S-tripping / with I2t characteristic / for eSet / independent of direction / minimum</li> </ul>	960 A
<ul style="list-style-type: none"> <li>at 500 V / for S-tripping / with I2t characteristic / for eSet / independent of direction / maximum</li> </ul>	40 kA
<ul style="list-style-type: none"> <li>at 690 V / for S-tripping / with I2t characteristic / for eSet / independent of direction / maximum</li> </ul>	33.6 kA
set values delay time (tsd) / for S-tripping / with I2t characteristic / for eSet / independent of direction	0.02-0.4; 0.001
product feature / for I-tripping	
<ul style="list-style-type: none"> <li>can be switched on/off</li> </ul>	Yes
<ul style="list-style-type: none"> <li>decoder and infinite adjustability are selectable (with eSet)</li> </ul>	Yes
set values setting current (I <sub>i</sub> ) / for I-tripping	1.5;2;3;4;6;8;10;12;15
reference value setting current (I <sub>i</sub> ) / for I-tripping	x I <sub>n</sub>
tripping factor setting current (I <sub>imax</sub> ) / for I-tripping	0.8
reference value setting current (I <sub>imax</sub> ) / for I-tripping	x I <sub>cs</sub>
set values setting current (I <sub>i</sub> ) / for I-tripping / for eSet	1.5-15;0.001
adjustable absolute value setting current (I <sub>i</sub> )	
<ul style="list-style-type: none"> <li>for I-tripping / for eSet / minimum</li> </ul>	2400 A
<ul style="list-style-type: none"> <li>at 500 V / for I-tripping / for eSet / maximum</li> </ul>	44 kA
<ul style="list-style-type: none"> <li>at 690 V / for I-tripping / for eSet / maximum</li> </ul>	33.6 kA
<b>G: ground fault GF</b>	
product feature / for G-tripping	
<ul style="list-style-type: none"> <li>can be switched on/off</li> </ul>	Yes
<ul style="list-style-type: none"> <li>selectable characteristic function</li> </ul>	Yes
set values setting current (I <sub>g</sub> ) / for G-tripping / with I0t characteristic	0.0625-1.25;0.001
reference value setting current (I <sub>g</sub> ) / for G-tripping / with I0t characteristic	x I <sub>n</sub>
set values delay time (t <sub>g</sub> ) / for G-tripping / with I0t characteristic	0.02-30;0.001
reference value delay time (t <sub>g</sub> ) / for G-tripping / with I0t characteristic	s
set values setting current (I <sub>g</sub> ) / for G-tripping / with I2t characteristic	0.0625-1.25;0.001
reference value setting current (I <sub>g</sub> ) / for G-tripping / with I2t characteristic	x I <sub>n</sub>
set values delay time (t <sub>g</sub> ) / for G-tripping / with I2t characteristic	0.02-30; 0.001
reference value delay time (t <sub>g</sub> ) / for G-tripping / with I2t characteristic	s
<b>Further protective functions</b>	
protection function	
<ul style="list-style-type: none"> <li>maintenance mode DAS+</li> </ul>	Yes
<b>Measuring functions</b>	
measurement function	
<ul style="list-style-type: none"> <li>current measurement</li> </ul>	Yes
<b>Communication</b>	
communication function	No
<b>Service Life</b>	
mechanical service life (operating cycles)	
<ul style="list-style-type: none"> <li>without support / typical</li> </ul>	15000
<ul style="list-style-type: none"> <li>with support / typical</li> </ul>	30000

electrical endurance (operating cycles)	
• at 690 V / without support / typical	10000
• at 690 V / with support / typical	30000

**Dimensions**

height	468 mm
width	320 mm
depth	471 mm

**Auxiliary circuit**

design of the auxiliary switch	4 NO + 4 NC
number of NC contacts / for auxiliary contacts	4
number of NO contacts / for auxiliary contacts	4
number of CO contacts / for auxiliary contacts	0

**Internal accessories**

product component	
• undervoltage release	No
• voltage trigger	No
• trip indicator	Yes
• motor drive	No

**Environmental conditions**

protection class IP / on the front	IP20
ambient temperature / during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C

**Environmental footprint**

Siemens Eco Profile (SEP)	Siemens EcoTech
---------------------------	-----------------

**Certificates**

reference code	
• according to IEC 81346-2	Q

**General Product Approval** EMV



**Radio Equipment Type Approval Certificate** Test Certificates

[Miscellaneous](#)



[Miscellaneous](#)

[FCC](#)

[Miscellaneous](#)

[Special Test Certificate](#)

**Maritime application** other



**other** Dangerous goods Environment

[Confirmation](#)

[Manufacturer Declaration](#)

[Dangerous goods information](#)

[Transport Information](#)



**Environment**



#### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA1116-2AF30-1AA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3WA1116-2AF30-1AA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA1116-2AF30-1AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA1116-2AF30-1AA0)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Information- and Downloadcenter (catalogues, leaflets,...)**

<http://www.siemens.com/energy-automation>

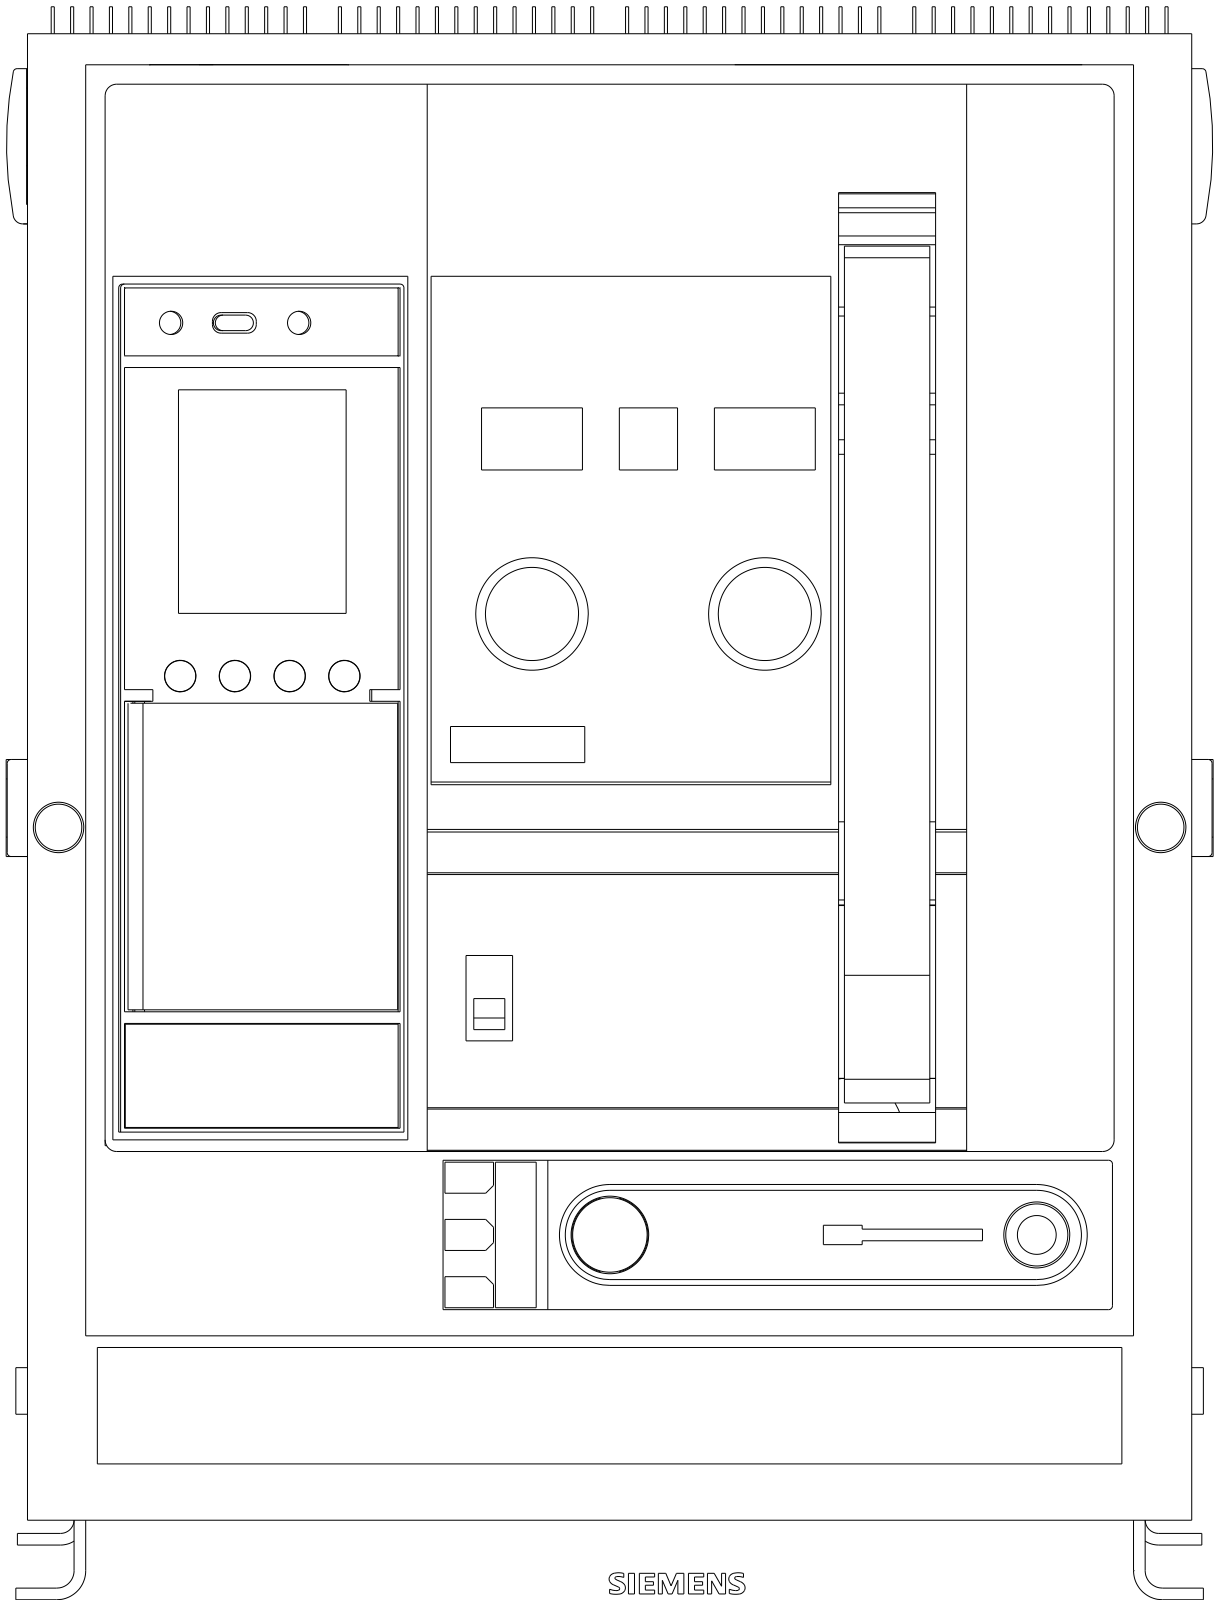

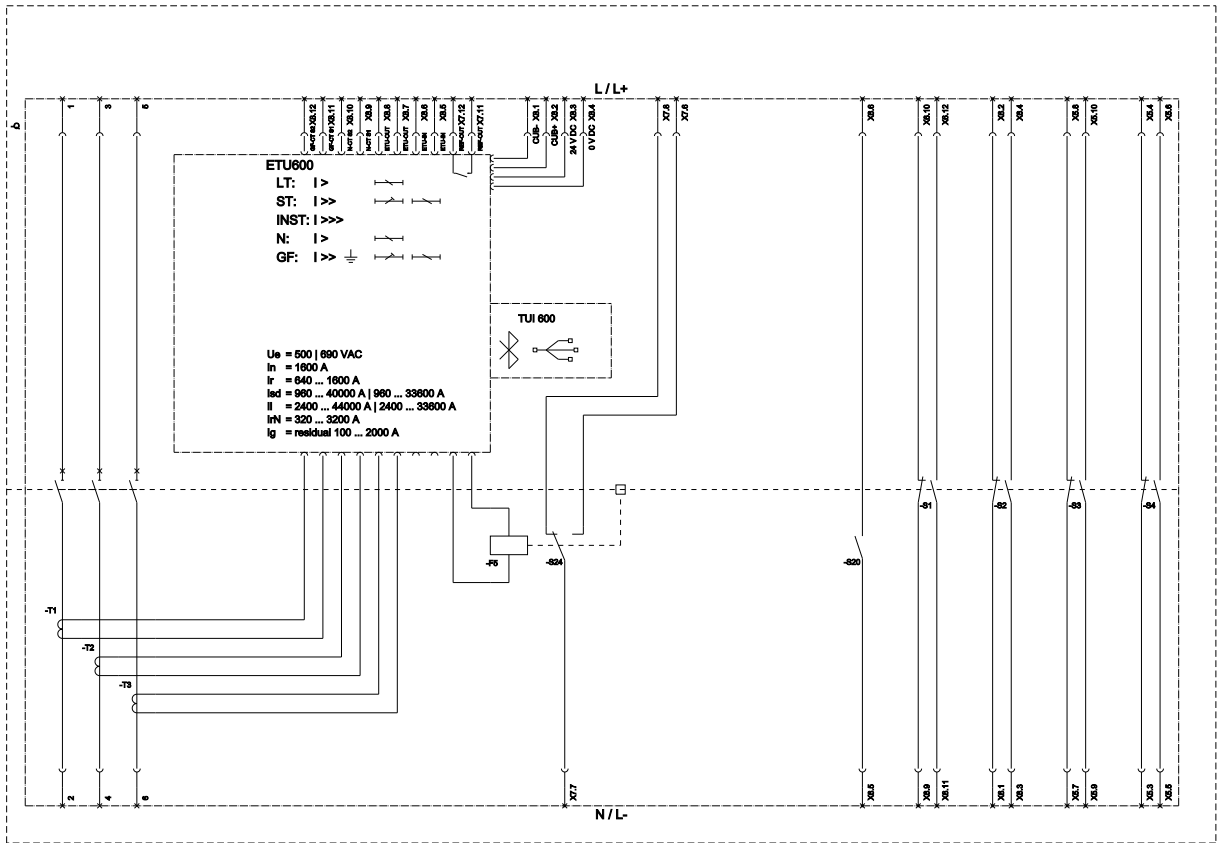

G (Ground Fault Protection / Fehlerstromschutz), LT (Long Time Delay / Überstromschutz), ST (Short Time Delay / Kurzschlusschutz, Innenstromschutz), DNT (Overcurrent / Kurzschlusschutz, außenstromschutz), H (Ground Protection / Fehlerstromschutz), GF (Ground Fault Protection / Fehlerstromschutz),  
 FS (Signalblock for trip unit / Auslöseorgan), S4 (ZAS: Safety alarm switch (Alarm position) / Alarm-Anzeige/Alarmknopf (Alarm Position)), S1-S8 (ALTC: Auxiliary switch / Hilfskontakt), S20 (ZTC: Ready to close signaling switch / Abschließkontakt/Anschließerblock),  
 FSD: position signaling switch module / Positionsmarkierungsmodule

last modified:

6/3/2024

