

# EMG 22-REL/KSR- 24/21 - Relay module



2951885

<https://www.phoenixcontact.com/gb/products/2951885>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay module, with soldered-in miniature switching relay, contact (AgNi): Medium to large loads, 1 PDT, input voltage 24 V AC/DC

## Your advantages

- Safe isolation between coil and contact side
- Integrated input circuit and interference suppression circuit

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2951885       |
| Packing unit                         | 10 pc         |
| Minimum order quantity               | 10 pc         |
| Sales key                            | DK61C2        |
| Product key                          | DK61C2        |
| GTIN                                 | 4017918084295 |
| Weight per piece (including packing) | 61 g          |
| Weight per piece (excluding packing) | 61.98 g       |
| Customs tariff number                | 85364190      |
| Country of origin                    | DE            |

# EMG 22-REL/KSR- 24/21 - Relay module



2951885

<https://www.phoenixcontact.com/gb/products/2951885>

## Technical data

### Notes

#### Utilization restriction

|          |                                                                           |
|----------|---------------------------------------------------------------------------|
| EMC note | EMC: class A product, see manufacturer's declaration in the download area |
|----------|---------------------------------------------------------------------------|

### Product properties

|                         |                                |
|-------------------------|--------------------------------|
| Product type            | Relay Module                   |
| Product family          | EMG                            |
| Application             | Universal                      |
| Operating mode          | 100% operating factor          |
| Mechanical service life | approx. $5 \times 10^7$ cycles |

#### Insulation characteristics

|                      |                                                                                                                            |
|----------------------|----------------------------------------------------------------------------------------------------------------------------|
| Insulation           | Basic insulation<br>Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths |
| Overvoltage category | III                                                                                                                        |
| Pollution degree     | 2                                                                                                                          |

#### Data management status

|                              |            |
|------------------------------|------------|
| Date of last data management | 12.09.2025 |
|------------------------------|------------|

### Electrical properties

|                                                 |                                                      |
|-------------------------------------------------|------------------------------------------------------|
| Maximum power dissipation for nominal condition | 0.43 W                                               |
| Test voltage (Winding/contact)                  | 5 kV <sub>rms</sub> (50 Hz, 1 min., winding/contact) |
| Rated insulation voltage                        | 260 V AC                                             |
| Rated surge voltage                             | 4 kV                                                 |

### Input data

#### Coil side

|                                |                                       |
|--------------------------------|---------------------------------------|
| Nominal input voltage $U_N$    | 24 V AC/DC                            |
| Input voltage range            | 19.2 V AC/DC ... 26.4 V AC/DC (20 °C) |
| Drive and function             | monostable                            |
| Drive (polarity)               | polarized                             |
| Typical input current at $U_N$ | 18 mA                                 |
| Typical response time          | 8 ms                                  |
| Typical release time           | 10 ms                                 |
| Protective circuit             | Bridge rectifier; Bridge rectifier    |
| Operating voltage display      | Yellow LED                            |

### Output data

#### Switching

# EMG 22-REL/KSR- 24/21 - Relay module



2951885

<https://www.phoenixcontact.com/gb/products/2951885>

|                                       |                        |
|---------------------------------------|------------------------|
| Contact switching type                | 1 changeover contact   |
| Type of switch contact                | Single contact         |
| Contact material                      | AgNi                   |
| Maximum switching voltage             | 250 V AC/DC            |
| Limiting continuous current           | 6 A                    |
| Maximum inrush current                | 8 A                    |
| Interrupting rating (ohmic load) max. | 144 W (at 24 V DC)     |
|                                       | 58 W (at 48 V DC)      |
|                                       | 48 W (at 60 V DC)      |
|                                       | 50 W (at 110 V DC)     |
|                                       | 80 W (at 220 V DC)     |
|                                       | 1500 VA (for 250 V AC) |

## Connection data

### Coil side

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm                                        |
| Screw thread                     | M3                                          |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 12                                   |

### Contact side

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm                                        |
| Screw thread                     | M3                                          |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 12                                   |

## Dimensions

|        |         |
|--------|---------|
| Width  | 22.5 mm |
| Height | 75 mm   |
| Depth  | 62.5 mm |

## Material specifications

|       |                  |
|-------|------------------|
| Color | green (RAL 6021) |
|-------|------------------|

## Environmental and real-life conditions

### Ambient conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Degree of protection                    | IP20             |
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

# EMG 22-REL/KSR- 24/21 - Relay module



2951885

<https://www.phoenixcontact.com/gb/products/2951885>

## Standards and regulations

|                       |             |
|-----------------------|-------------|
| Standards/regulations | IEC 60664-1 |
|-----------------------|-------------|

## Mounting

|                   |                           |
|-------------------|---------------------------|
| Mounting type     | DIN rail mounting         |
| Assembly note     | in rows with zero spacing |
| Mounting position | any                       |

# EMG 22-REL/KSR- 24/21 - Relay module




2951885

<https://www.phoenixcontact.com/gb/products/2951885>

## Drawings

Circuit diagram

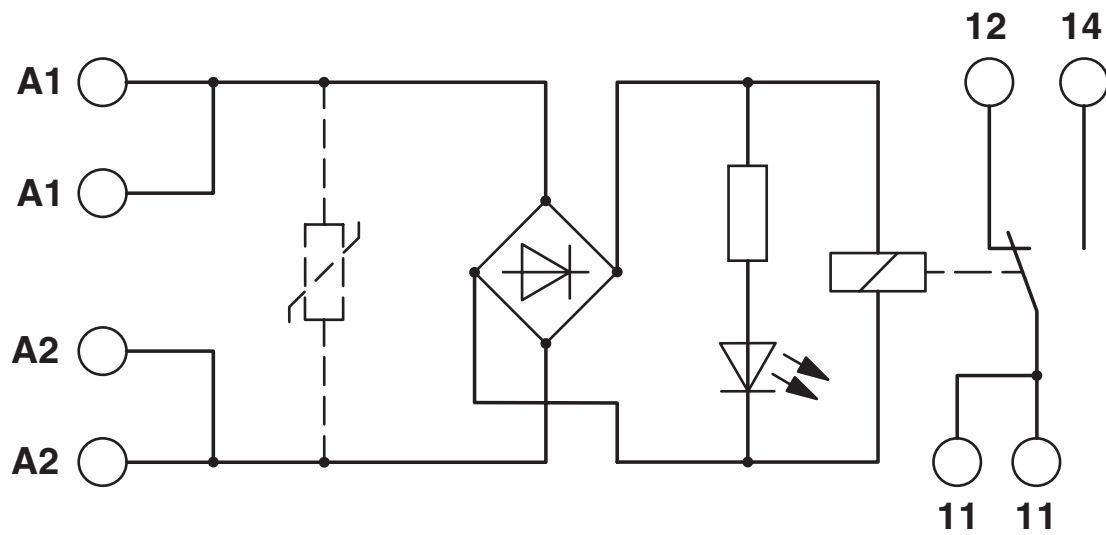

# EMG 22-REL/KSR- 24/21 - Relay module



2951885

<https://www.phoenixcontact.com/gb/products/2951885>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2951885>



**EAC**

Approval ID: RU\*C-DE.\*08.B.00010

# EMG 22-REL/KSR- 24/21 - Relay module



2951885

<https://www.phoenixcontact.com/gb/products/2951885>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27371601 |
| ECLASS-15.0 | 27371601 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

2951885

<https://www.phoenixcontact.com/gb/products/2951885>

## Environmental product compliance

### EU RoHS

|                                         |            |
|-----------------------------------------|------------|
| Fulfills EU RoHS substance requirements | Yes        |
| Exemption                               | 6(c), 7(a) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | d0d4d327-c9f3-4560-9a20-a38c2b94345f |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)