


Product datasheet

Specifications



MODULAR FRONT PLATE W600/ W650 3M

LVS03203

EAN Code: 3606481866325

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle PrismaSeT PrismaSeT Pack 250 enclosure
Type of front plate	Cut-out Modular
Installed device	TeSys: fixed GV2L TeSys: fixed GV2LE TeSys: fixed GV2ME TeSys: fixed GV2P TeSys: fixed GV2RTn Vigilohm: IM20 Vigilohm: IM20H Vigilohm: fixed IM9 Vigilohm: IM9 Vigilohm: fixed IM9-OL Vigilohm: IM9-OL Acti 9: measurement device Multi9: measurement device Acti 9: fixed modular device <= 40 A Multi9: fixed modular device <= 40 A Vigirex: RH10 Vigirex: RH197M Vigirex: RH21 Vigirex: RH99
Poles description	9 x 3P: modular rail support: GV2L 9 x 3P: modular rail support: GV2LE 9 x 3P: modular rail support: GV2ME 9 x 3P: modular rail support: GV2P 9 x 3P: modular rail support: GV2RTn

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm Pack enclosure - width 555 mm Pack enclosure - width 600 mm
9 mm pitches	48
Number of 18 mm modules per row	24
Number of vertical modules [50 mm]	3
Standards	IEC 61439-1 IEC 61439-2

Product certifications	ASTA
Material	Steel
Surface finish	Matt Textured
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	150 mm
Width	500 mm
Net weight	0.54 kg
Quantity per set	Set of 1

functional unit	<p>600 mm PrismaSeT G floor-standing enclosure TeSys GV2L fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure TeSys GV2L fixed 3P 9 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle TeSys GV2L fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G floor-standing enclosure TeSys GV2LE fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure TeSys GV2LE fixed 3P 9 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle TeSys GV2LE fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G floor-standing enclosure TeSys GV2ME fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure TeSys GV2ME fixed 3P 9 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle TeSys GV2ME fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G floor-standing enclosure TeSys GV2P fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure TeSys GV2P fixed 3P 9 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle TeSys GV2P fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G floor-standing enclosure TeSys GV2RTn fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure TeSys GV2RTn fixed 3P 9 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle TeSys GV2RTn fixed 3P 9 direct 3</p> <p>600 mm PrismaSeT G floor-standing enclosure Vigilohm 4 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure Vigilohm 4 3</p> <p>600 mm PrismaSeT G floor-standing enclosure Vigilohm fixed 6 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure Vigilohm fixed 6 3</p> <p>650 mm 400 mm PrismaSeT P cubicle Vigilohm 6 3</p> <p>650 mm 400 mm PrismaSeT P cubicle Acti 9 measurement device 3</p> <p>650 mm 400 mm PrismaSeT P cubicle Multi9 measurement device 3</p> <p>600 mm PrismaSeT G floor-standing enclosure Acti 9 modular device <= 40 A fixed 48 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure Acti 9 modular device <= 40 A fixed 48 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle Acti 9 modular device <= 40 A fixed 48 direct 3</p> <p>600 mm PrismaSeT G floor-standing enclosure Multi9 modular device <= 40 A fixed 48 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure Multi9 modular device <= 40 A fixed 48 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle Multi9 modular device <= 40 A fixed 48 direct 3</p> <p>600 mm PrismaSeT G floor-standing enclosure Vigirex 8 direct 3</p> <p>600 mm PrismaSeT G wall-mounted enclosure Vigirex 8 direct 3</p> <p>650 mm 400 mm PrismaSeT P cubicle Vigirex 8 3</p> <p>650 mm 400 mm PrismaSeT P cubicle Vigirex 6 3</p> <p>600 mm Prisma Pack 250 Pack enclosure Acti 9 modular device <= 40 A fixed 48 direct 6</p> <p>600 mm Prisma Pack 250 Pack enclosure Multi9 modular device <= 40 A fixed 48 direct 6</p>
------------------------	---

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	16.000 cm
Package 1 Length	51.000 cm
Package 1 Weight	535.000 g
Unit Type of Package 2	BB1

Number of Units in Package 2	10
Package 2 Height	16.500 cm
Package 2 Width	17.800 cm
Package 2 Length	52.500 cm
Package 2 Weight	5.525 kg
Unit Type of Package 3	P12
Number of Units in Package 3	450
Package 3 Height	97.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	256.010 kg

Logistical informations

Country of origin	FR
--------------------------	----

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

Use Again

Repack and remanufacture

End of life manual availability


No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

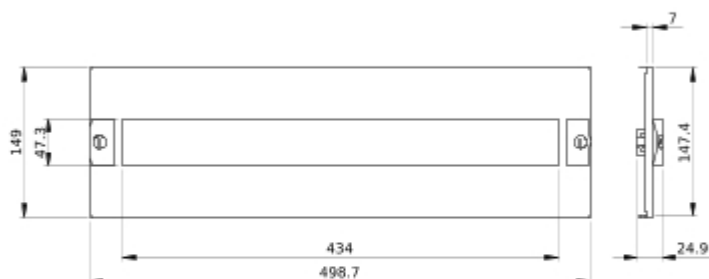

- All dimensions are approximate and are in mm
- Also see technical documentation.