


Product datasheet

Specifications



MODULAR FRONT PLATE W600/ W650 4M

LVS03204

EAN Code: 3606481872708

Main

| | |
|------------------------------------|--|
| Range | PrismaSeT |
| Range of product | PrismaSeT G PrismaSeT P |
| Product or component type | Front plate |
| Accessory / separate part category | Installation accessory |
| Range compatibility | PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle PrismaSeT PrismaSeT Pack 250 enclosure |
| Type of front plate | Cut-out Modular |
| Installed device | Acti 9: fixed modular device Multi9: fixed modular device Vigilohm: IM20 Vigilohm: IM20H ComPact: fixed INS100 - control: direct front rotary handle - vertical installation ComPact: fixed INS125 - control: direct front rotary handle - vertical installation ComPact: fixed INS160 - control: direct front rotary handle - vertical installation ComPact: fixed INS40 - control: direct front rotary handle - vertical installation ComPact: fixed INS63 - control: direct front rotary handle - vertical installation Vigilohm: IM10 Vigilohm: IM10H |
| Poles description | 1 x 3P: modular rail support: INS100 vertical installation 1 x 4P: modular rail support: INS100 vertical installation 1 x 3P: modular rail support: INS125 vertical installation 1 x 4P: modular rail support: INS125 vertical installation 1 x 3P: modular rail support: INS160 vertical installation 1 x 4P: modular rail support: INS160 vertical installation 1 x 3P: modular rail support: INS40 vertical installation 1 x 4P: modular rail support: INS40 vertical installation 1 x 3P: modular rail support: INS63 vertical installation 1 x 4P: modular rail support: INS63 vertical installation |

Complementary

| | |
|------------------------------------|---|
| Enclosure/cubicle description | Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm Pack enclosure - width 555 mm Pack enclosure - width 600 mm |
| Connection position | Direct connection |
| 9 mm pitches | 48 |
| Number of 18 mm modules per row | 24 |
| Number of vertical modules [50 mm] | 4 |
| Standards | IEC 61439-2 IEC 61439-1 |
| Product certifications | ASTA |

| | |
|-----------------------------|--|
| Material | Steel |
| Surface finish | Matt Textured |
| Protective treatment | Electrophoresis treatment and hot-polymerised polyester epoxy powder |
| Colour | White (RAL 9003) |
| Height | 200 mm |
| Width | 500 mm |
| Net weight | 0.72 kg |
| Quantity per set | Set of 1 |

functional unit

650 mm 400 mm PrismaSeT P cubicle Vigilohm 4 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS100 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS100 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS100 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS100 fixed direct front rotary handle vertical 4P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS100 fixed direct front rotary handle vertical 3P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS100 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS125 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS125 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS125 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS125 fixed direct front rotary handle vertical 4P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS125 fixed direct front rotary handle vertical 3P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS125 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS160 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS160 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS160 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS160 fixed direct front rotary handle vertical 4P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS160 fixed direct front rotary handle vertical 3P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS160 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS40 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS40 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS40 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS40 fixed direct front rotary handle vertical 4P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS40 fixed direct front rotary handle vertical 3P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS40 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS63 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS63 fixed direct front rotary handle vertical 3P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure ComPact INS63 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G wall-mounted enclosure ComPact INS63 fixed direct front rotary handle vertical 4P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS63 fixed direct front rotary handle vertical 3P 1 direct 4
650 mm 400 mm PrismaSeT P cubicle ComPact INS63 fixed direct front rotary handle vertical 4P 1 direct 4
600 mm PrismaSeT G floor-standing enclosure Acti 9 modular device fixed 48 direct 4
600 mm PrismaSeT G wall-mounted enclosure Acti 9 modular device fixed 48 direct 4
650 mm 400 mm PrismaSeT P cubicle Acti 9 modular device fixed 48 direct 4
600 mm PrismaSeT G floor-standing enclosure Multi9 modular device fixed 48 direct 4
600 mm PrismaSeT G wall-mounted enclosure Multi9 modular device fixed 48 direct 4
650 mm 400 mm PrismaSeT P cubicle Multi9 modular device fixed 48 direct 4
600 mm Prisma Pack 250 Pack enclosure Multi9 modular device fixed 48 direct 6

Packing Units

| | |
|------------------------------|-----|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |

| | |
|------------------------------|------------|
| Package 1 Height | 3.000 cm |
| Package 1 Width | 21.200 cm |
| Package 1 Length | 51.000 cm |
| Package 1 Weight | 717.000 g |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Height | 16.500 cm |
| Package 2 Width | 22.000 cm |
| Package 2 Length | 52.500 cm |
| Package 2 Weight | 7.390 kg |
| Unit Type of Package 3 | P12 |
| Number of Units in Package 3 | 360 |
| Package 3 Height | 100.000 cm |
| Package 3 Width | 80.000 cm |
| Package 3 Length | 120.000 cm |
| Package 3 Weight | 272.480 kg |

Logistical informations

| | |
|-------------------|----|
| Country of origin | FR |
|-------------------|----|

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

Use Again

Repack and remanufacture

End of life manual availability


No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

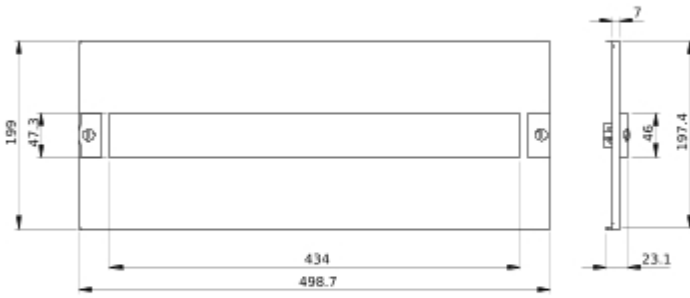

- All dimensions are approximate and are in mm
- Also see technical documentation,