


R1D200



Radar distance sensor

R1DBAF6KG/US/IO-Link

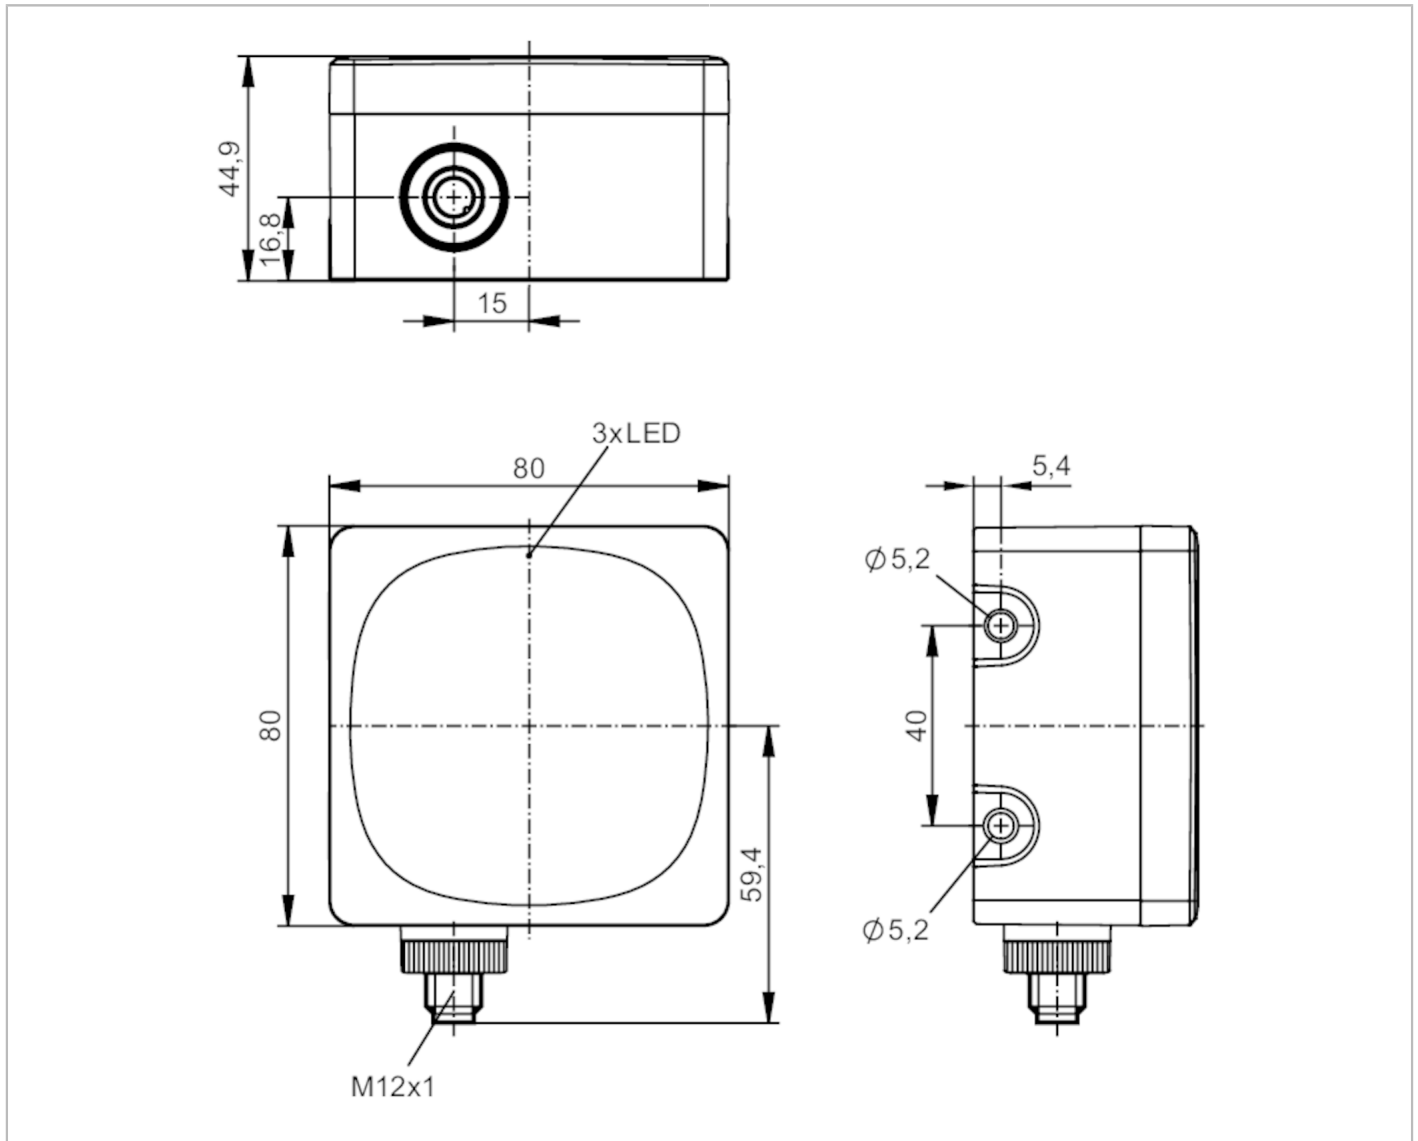

Product characteristics	
Communication interface	IO-Link
Housing	rectangular
Dimensions [mm]	80 x 80 x 45
Digital	
Electrical design	PNP/NPN; (parameterisable)
Output function	normally open / normally closed; (parameterisable)
Application	
Radio approval for	EU/RED; USA; Canada; Great Britain; Australia; Chile; Japan; Mexico; Namibia; New Zealand; South Africa
Note on radio approval	The list of countries applying the European Radio Equipment Directive 2014/53/EU (RED) can be found under "Downloads".

R1D200



Radar distance sensor

R1DBAF6KG/US/IO-Link

Electrical data		
Operating voltage	[V]	10...30 DC; (to SELV/PELV ; energy-limited circuits according to IEC/UL 61010-1 3rd ed. cl. 9.4)
Current consumption	[mA]	< 300; (mean value: 150 mA)
Power consumption	[W]	21; (maximum)
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	1000
Operating frequency [GHz]		77...81
Maximum radiated average power spectral density EIRP [dBm/MHz]		-17
Radiated peak power EIRP [dBm]		30
Inputs / outputs		
Total number of inputs and outputs		3
Inputs		
Inputs	IN1	activation/deactivation of the radar
Outputs		
Total number of outputs		2
Output signal	OUT1	switching signal; IO-Link
	OUT2	switching signal; analogue signal
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Analogue		
Analogue current output	[mA]	4...20, invertible; (scalable)
Max. load	[Ω]	500; (< 250 Ω: Ub 16...30 V DC; 250...500 Ω: Ub 18...30 V DC)
Analogue voltage output	[V]	0...10, invertible; (scalable)
Min. load	[Ω]	2000
Digital		
Electrical design		PNP/NPN; (parameterisable)
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Detection zone		
Range	[m]	0.1...50; (referred to a 10 cm corner reflector)
Angle of aperture cylindrical	[°]	horizontal 40 vertical 20
Measuring/setting range		
Measuring range	[m]	0.1...50; (see diagram:)
Sampling rate	[Hz]	20...100

R1D200



Radar distance sensor

R1DBAF6KG/US/IO-Link

Accuracy / deviations																	
Hysteresis [mm]	5; (parameterisable)																
Temperature coefficient analogue output [% of the span / 10 K]	± 0,1																
Repeatability analogue output [% of the span]	< 0,1																
Linearity error of analogue output [% of the span]	± 0,15																
Precision analogue output [% of the span]	± 0,2 (in addition to the accuracy specifications in the further data section)																
Software / programming																	
Parameter setting options	only via IO-Link																
Interfaces																	
Communication interface	IO-Link																
Transmission type	COM3 (230,4 kBaud)																
IO-Link revision	1.1																
SDCI standard	IEC 61131-9																
Profiles	<table border="1"> <tr> <td>BLOB</td> <td>Binary Large Object transfer</td> </tr> <tr> <td>Common - I&D</td> <td>Identification and Diagnosis</td> </tr> <tr> <td>Function</td> <td>Locator</td> </tr> <tr> <td>Function</td> <td>ProductURI</td> </tr> </table>	BLOB	Binary Large Object transfer	Common - I&D	Identification and Diagnosis	Function	Locator	Function	ProductURI								
BLOB	Binary Large Object transfer																
Common - I&D	Identification and Diagnosis																
Function	Locator																
Function	ProductURI																
SIO mode	yes																
Required master port type	A																
Min. process cycle time [ms]	3.2																
IO-Link process data (cyclical)	<table border="1"> <thead> <tr> <th>function</th> <th>bit length</th> </tr> </thead> <tbody> <tr> <td>distance</td> <td>32</td> </tr> <tr> <td>speed</td> <td>32</td> </tr> <tr> <td>Power</td> <td>8</td> </tr> <tr> <td>RCS</td> <td>8</td> </tr> <tr> <td>sensor inclination</td> <td>1</td> </tr> <tr> <td>device status</td> <td>4</td> </tr> <tr> <td>binary switching information</td> <td>4</td> </tr> </tbody> </table>	function	bit length	distance	32	speed	32	Power	8	RCS	8	sensor inclination	1	device status	4	binary switching information	4
function	bit length																
distance	32																
speed	32																
Power	8																
RCS	8																
sensor inclination	1																
device status	4																
binary switching information	4																
IO-Link functions (acyclical)	application specific tag; operating hours counter; number of trigger events; internal temperature; ROI setting																
Supported DeviceIDs	<table border="1"> <thead> <tr> <th>Type of operation</th> <th>DeviceID</th> </tr> </thead> <tbody> <tr> <td>default</td> <td>1518</td> </tr> </tbody> </table>	Type of operation	DeviceID	default	1518												
Type of operation	DeviceID																
default	1518																
Operating conditions																	
Ambient temperature [°C]	-40...80																
Note on ambient temperature	without using the analogue output: -40...85 °C																
Storage temperature [°C]	-40...85																
Protection	IP 65; IP 66; IP 67; IP 69K; (with mounted connectors or protective caps)																

R1D200



Radar distance sensor

R1DBAF6KG/US/IO-Link

Tests / approvals		
EMC	DIN EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	DIN EN 61000-4-3 HF radiated	10 V/m
	DIN EN 61000-4-4 Burst	2 kV
	DIN EN 61000-4-6 HF conducted	10 V
	DIN EN 61000-6-2	immunity / industrial environments
	EN 55032 emission	Class A
Impact resistance	IEC 62262	IK06 (1J)
Vibration resistance	DIN EN 60068-2-6 Fc	10 g 10 frequency cycles, 1 octave/minute, in 3 axes
Shock resistance	DIN EN 60068-2-27 Ea	50 g 11 ms half-sine; 10 shocks each in every direction along the 3 coordinate axes
Continuous shock resistance	DIN EN 60068-2-29 Eb	40 g 6 ms half-sine; 4,000 shocks each in every direction along the 3 coordinate axes
Fast temperature change	DIN EN 60068-2-14 Na	TA = -40°C; TB = 85°C; t1 = 30 min; t2 = < 30 s; 300 cycles
Salt spray test	DIN EN 60068-2-11 Ka	8 test cycles
Electrical safety	DIN EN 61010-2-201	electric shock / electrical supply only via SELV/PELV circuits
MTTF [years]		53
UL approval	Ta	-40...65 °C
	File number UL	E205959
Mechanical data		
Weight [g]		412.15
Housing		rectangular
Mounting		flush mountable
Dimensions [mm]		80 x 80 x 45
Materials		housing: PA; radome: PEI; Sealing: HNBR
Displays / operating elements		
Display	switching status	2x LED, yellow
	operation	1x LED, green
	errors	1x LED, red
Remarks		
Pack quantity		1 pcs.

R1D200




Radar distance sensor


R1DBAF6KG/US/IO-Link

Electrical connection

Connection

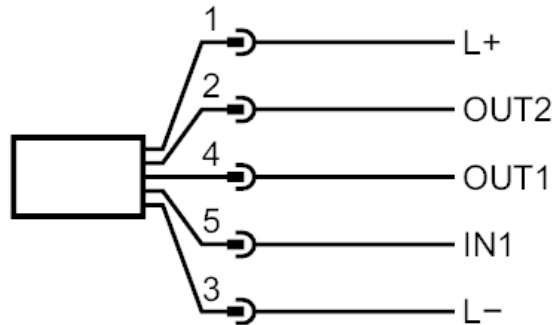

Connector: 1 x M12; coding: A



- 1 L+
- 2 OUT2 switching output analogue output
- 4 OUT1 switching output IO-Link
- 5 IN1 activation/deactivation of the radar
- 3 L-

Other data

Operating mode	standard	Long range, high velocity	high measuring frequency
max. distance	0.1...20 m	0.25...50 m	0.1...20 m
distance resolution	100 mm	320 mm	100 mm
distance accuracy	± 5 mm	± 15 mm	± 5 mm
max. velocity	± 6 m/s	± 15 m/s	± 15 m/s
velocity resolution	± 0.35 m/s	± 0.38 m/s	
speed accuracy	± 0.01 m/s	± 0.04 m/s	± 0.20 m/s
Sampling rate	20 Hz	20 Hz	100 Hz
distance	referred to a 10 cm corner reflector		
Resolution	for the detection of two objects of the same size		
accuracy	for a strong, point-shaped target		

R1D200




Radar distance sensor

R1DBAF6KG/US/IO-Link

Diagrams and graphs

Detection zone

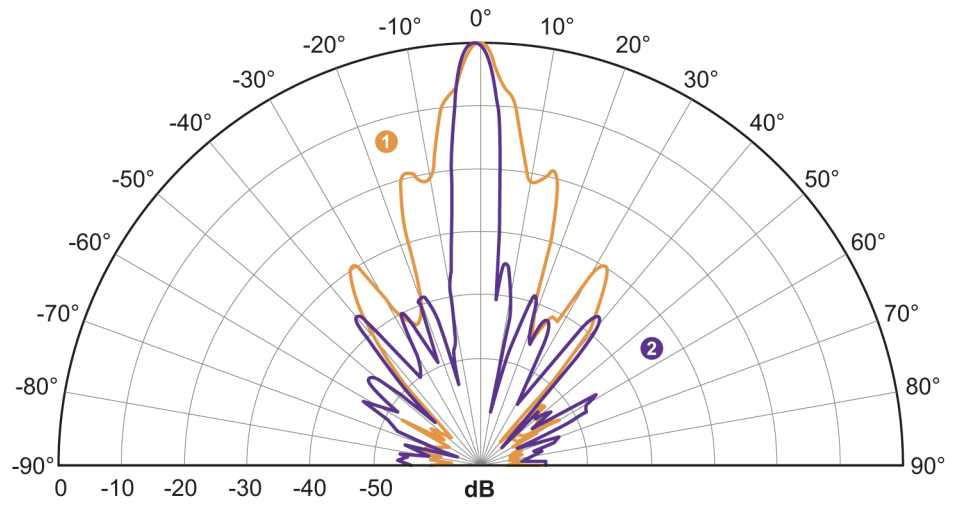

1: azimuth

2: elevation

conditions

Reflector: 4.3" Trihedral Corner Reflector (SAJ043-S1)

RCS: 10 dBm²

distance: 5 m

operating frequency: 79 GHz