

# Product datasheet

Specifications



## TeSys D contactor - 3P - $\leq 440$ V - 12 A AC-3 - 100...250 V AC/DC coil

Local distributor code:

407811614

LC1D12KUE

EAN Code: 3606480987687

## Main

Range of product	TeSys Deca Advanced
Product or component type	Contactor
Device short name	LC1D
Contactor application	Motor control Resistive load
Utilisation category	AC-1 AC-3 AC-3e
Poles description	3P
[U <sub>e</sub> ] rated operational voltage	Power circuit: $\leq 690$ V AC 25...400 Hz
[I <sub>e</sub> ] rated operational current	25 A (at $\leq 60$ °C) at $\leq 440$ V AC-1 for power circuit 12 A (at $\leq 60$ °C) at $\leq 440$ V AC-3 for power circuit 12 A (at $\leq 60$ °C) at $\leq 440$ V AC-3e for power circuit
[U <sub>c</sub> ] control circuit voltage	100...250 V AC 50/60 Hz 100...250 V DC

## Complementary

Motor power kW	3 kW at 220...230 V AC 50 Hz (AC-3) 5.5 kW at 380...400 V AC 50 Hz (AC-3) 5.5 kW at 415 V AC 50 Hz (AC-3) 5.5 kW at 440 V AC 50 Hz (AC-3) 7.5 kW at 500 V AC 50 Hz (AC-3) 7.5 kW at 660...690 V AC 50 Hz (AC-3) 3 kW at 220...230 V AC 50 Hz (AC-3e) 5.5 kW at 380...400 V AC 50 Hz (AC-3e) 5.5 kW at 415 V AC 50 Hz (AC-3e) 5.5 kW at 440 V AC 50 Hz (AC-3e) 7.5 kW at 500 V AC 50 Hz (AC-3e) 7.5 kW at 660...690 V AC 50 Hz (AC-3e)
Motor power hp	0.5 hp at 115 V AC 60 Hz for 1 phase motors 2 hp at 230/240 V AC 60 Hz for 1 phase motors 3 hp at 200/208 V AC 60 Hz for 3 phases motors 3 hp at 230/240 V AC 60 Hz for 3 phases motors 7.5 hp at 460/480 V AC 60 Hz for 3 phases motors 10 hp at 575/600 V AC 60 Hz for 3 phases motors
Compatibility code	LC1D
Pole contact composition	3 NO
Protective cover	With
[I <sub>th</sub> ] conventional free air thermal current	10 A (at 60 °C) for signalling circuit 25 A (at 60 °C) for power circuit
Irms rated making capacity	250 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	250 A at 440 V for power circuit conforming to IEC 60947

<b>[Icw] rated short-time withstand current</b>	100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit 30 A 40 °C - 10 min for power circuit 61 A 40 °C - 1 min for power circuit 105 A 40 °C - 10 s for power circuit 210 A 40 °C - 1 s for power circuit
<b>Associated fuse rating</b>	10 A gG for signalling circuit conforming to IEC 60947-5-1 40 A gG at <= 690 V coordination type 1 for power circuit 25 A gG at <= 690 V coordination type 2 for power circuit
<b>Average impedance</b>	2.5 mOhm - Ith 25 A 50 Hz for power circuit
<b>Power dissipation per pole</b>	1.56 W AC-1 0.36 W AC-3 0.36 W AC-3e
<b>[Ui] rated insulation voltage</b>	Power circuit: 690 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-1
<b>Overvoltage category</b>	III
<b>Pollution degree</b>	3
<b>[Uimp] rated impulse withstand voltage</b>	6 kV conforming to IEC 60947
<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
<b>Mechanical durability</b>	15 Mcycles
<b>Electrical durability</b>	2.3 Mcycles 11 A AC-3 at Ue <= 440 V 0.8 Mcycles 25 A AC-1 at Ue <= 440 V 2.3 Mcycles 11 A AC-3e at Ue <= 440 V
<b>Control circuit type</b>	AC/DC at 50/60 Hz AC/DC electronic
<b>Coil technology</b>	Built-in bidirectional peak limiting
<b>Control circuit voltage limits</b>	<= 0.1 Uc (-40...70 °C):drop-out AC/DC 0.85...1.1 Uc (-40...60 °C):operational AC/DC 1...1.1 Uc (60...70 °C):operational AC/DC
<b>Inrush power in VA</b>	25 VA 50/60 Hz (at 20 °C)
<b>Inrush power in W</b>	18 W (at 20 °C)
<b>Hold-in power consumption in VA</b>	1.6 VA 50/60 Hz (at 20 °C)
<b>Hold-in power consumption in W</b>	1.1 W at 20 °C
<b>Heat dissipation</b>	1.1 W at 50/60 Hz
<b>Operating time</b>	45...55 ms closing 20...90 ms opening
<b>Maximum operating rate</b>	3600 cyc/h at 60 °C
<b>Connections - terminals</b>	Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 2 1...2.5 mm <sup>2</sup> - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: solid Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: solid Power circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 2 1...2.5 mm <sup>2</sup> - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: solid Power circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: solid

<b>Tightening torque</b>	Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2
<b>Auxiliary contact composition</b>	1 NO + 1 NC
<b>Auxiliary contacts type</b>	type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1
<b>Signalling circuit frequency</b>	25...400 Hz
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Insulation resistance</b>	> 10 MOhm for signalling circuit
<b>Non-overlap time</b>	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
<b>Mounting support</b>	Rail Plate

## Environment

<b>Standards</b>	EN/IEC 60947-4-1 EN/IEC 60947-5-1 UL 60947-4-1 CSA C22.2 No 60947-4-1 IEC 60335-1
<b>Product certifications</b>	CCC CSA EAC UL KC DNV-GL LROS (Lloyds register of shipping) UKCA
<b>IP degree of protection</b>	IP20 front face conforming to IEC 60529
<b>Climatic withstand</b>	conforming to IACS E10 exposure to damp heat conforming to IEC 60947-1 Annex Q category D exposure to damp heat
<b>Permissible ambient air temperature around the device</b>	-40...60 °C 60...70 °C with derating
<b>Operating altitude</b>	0...3000 m
<b>Fire resistance</b>	850 °C conforming to IEC 60695-2-1
<b>Flame retardance</b>	V1 conforming to UL 94
<b>Mechanical robustness</b>	Vibrations contactor open (2 Gn, 5...300 Hz) Vibrations contactor closed (4 Gn, 5...300 Hz) Shocks contactor open (10 Gn for 11 ms) Shocks contactor closed (15 Gn for 11 ms)
<b>Height</b>	77 mm
<b>Width</b>	45 mm
<b>Depth</b>	86 mm
<b>Net weight</b>	0.373 kg

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	5.200 cm

Package 1 Width	9.200 cm
Package 1 Length	11.200 cm
Package 1 Weight	392.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	6.203 kg

## Logistical informations

Country of origin	FR
-------------------	----

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint 12

Environmental Disclosure [Product Environmental Profile](#)

### Use Better

#### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant with Exemptions

SCIP Number 7d699774-c34b-4bf4-9ecb-388a149eefdd

REACH Regulation [REACH Declaration](#)

Halogen-free status Halogen free plastic parts & cables product

### Use Again

#### Repack and remanufacture

End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Offer Marketing Illustration

Product benefits / Features

---

## TeSys Deca Contactors



### Reliable

Multi-standard solutions, high reliability, long mechanical and electrical durability for different sizes, and the most complete accessories.



### Energy efficiency

These electronic-coil contactors require up to 80 % less energy than electro-mechanical contactors.



### Universal

Multi standards certified (IEC, UL, CSA, CCC, EAC, Marine), Green Premium compliant (RoHS/REACH).



Offer Marketing Illustration

Product benefits / Features

---



The image shows a TeSys Deca contactor, model LC1D09, which is a three-pole AC contactor. It is black with a green control panel. The top panel has three terminals labeled 1, 2, and 3. The middle panel has three terminals labeled 13 NO, 22 NC, and A1. The bottom panel has three terminals labeled 4, 5, and 6. The Schneider logo and 'TeSys' branding are visible on the front.

### TeSys Deca Contactors

#### Technical Benefits

- Deca green delivers a consistent low consumption range of contactors from 9 A to 80 A.
- Covers control voltage from 24 to 250 V, with same coils for AC and DC.
- Designed to meet the requirements of industrial and HVAC applications
- With IEC60335-1 compliance, improved fire resistance, and dust-proof auxiliaries
- Suitable for safety applications thanks to mechanically linked contacts and mirror contacts
- Outstanding breaking/making capacity up to 20 In with PLC direct connection

Offer Marketing Illustration

Product benefits / Features

---

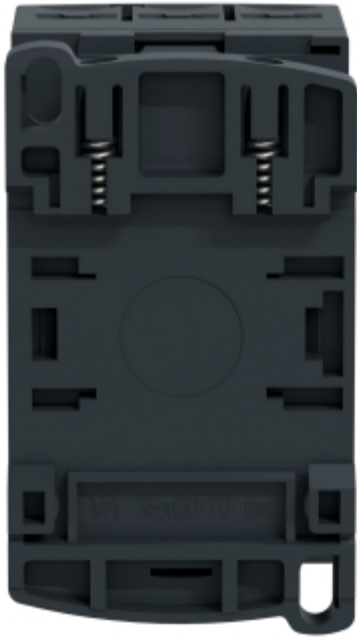


Image of product / Alternate images

**Alternative**

---





Technical Illustration

Assembly's dimensions

---

