

# Product datasheet

Specifications

## FR.PL VIGI NSX.TOG/CVS.ROT -4P 250 HZ 4M



LVS03606

EAN Code: 3606481866042

### Main

<b>Range</b>	PrismaSeT
<b>Range of product</b>	PrismaSeT P
<b>Product or component type</b>	Front plate
<b>Accessory / separate part category</b>	Installation accessory
<b>Range compatibility</b>	PrismaSeT PrismaSeT P cubicle
<b>Type of front plate</b>	Cut-out

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Installed device</b>	<p>EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: toggle - horizontal installation</p> <p>EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX100...160 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX250 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>Enerlin'X: fixed FDM121 - control: remote control - vertical installation</p>
-------------------------	--

<b>Poles description</b>	<p>1 x 4P: mounting plate support: CVS100...160 horizontal installation</p> <p>1 x 4P: mounting plate support: CVS250 horizontal installation</p> <p>1 x 4P: mounting plate support: NSX100...160 horizontal installation</p> <p>1 x 4P: mounting plate support: NSX250 horizontal installation</p>
--------------------------	---

<b>Operating position</b>	Horizontal
---------------------------	------------

## Complementary

<b>Enclosure/cubicle description</b>	Cubicle - width 650 mm depth 400 mm
--------------------------------------	-------------------------------------

<b>Connection position</b>	Direct connection
----------------------------	-------------------

<b>Number of vertical modules [50 mm]</b>	4
---	---

<b>Standards</b>	IEC 61439-1 IEC 61439-2
------------------	----------------------------

<b>Product certifications</b>	ASTA
-------------------------------	------

<b>Surface finish</b>	Textured Matt
<b>Protective treatment</b>	Electrophoresis treatment and hot-polymerised polyester epoxy powder
<b>Colour</b>	White (RAL 9003)
<b>Height</b>	200 mm
<b>Net weight</b>	0.76 kg
<b>Quantity per set</b>	Set of 1
<b>functional unit</b>	<p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100...160 without fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 without fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100...160 with fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 with fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in direct front rotary handle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in motor mechanism horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle Enerlin'X FDM121 fixed remote control vertical 1</p>

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1

Package 1 Height	3.000 cm
Package 1 Width	21.000 cm
Package 1 Length	51.000 cm
Package 1 Weight	794.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	16.500 cm
Package 2 Width	22.200 cm
Package 2 Length	52.400 cm
Package 2 Weight	8.170 kg
Unit Type of Package 3	P12
Number of Units in Package 3	360
Package 3 Height	102.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	299.840 kg

## Logistical informations

Country of origin	FR
-------------------	----

## Contractual warranty

Warranty (in months)	18
----------------------	----

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

## Use Again

### Repack and remanufacture

End of life manual availability

No need of specific recycling operations


Take-back

No

Technical Illustration

Dimensions

---

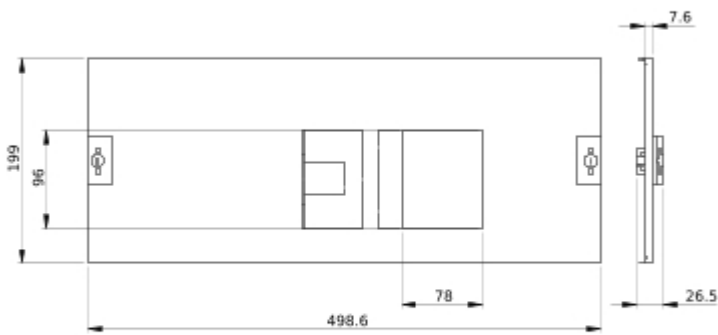

- All dimensions are approximate and are in  
- Also see technical documentation.