

# Product datasheet

Specifications

## COPPER CONNECTION NSX/CVS/ INS-INV 630 4P/UNIVERSAL POWER SUPPLY



LVS04073

EAN Code: 3606481867346

### Main

Range	Linergy
Range of product	Linergy
Product or component type	Connection
Product name	Linergy BW
product name	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P enclosure Linergy Linergy BW busbar
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-1, inside enclosure IEC 61439-2, inside enclosure
Product certifications	ASTA

### Complementary

Cubicle-device connection	universal power supply block
Poles description	4P
installation description	Cubicle duct - width 300 mm Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm
Installed device	ComPact: fixed NSX400 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle vertical installation ComPact: fixed INS320...400 - control: direct front rotary handle vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle vertical installation
[Ie] rated operational current	630 A

---

<b>Colour</b>	Anthracite grey (RAL 7016)
<b>Net weight</b>	5.1 kg
<b>Quantity per set</b>	Set of 4

---



---

rotary handle vertical 4P 1 direct with long terminal shield 12  
300 mm PrismaSeT G floor-standing duct ComPact NSX630 without fixed toggle  
vertical 3P 1 direct with long terminal shield 12  
300 mm PrismaSeT G wall-mounted duct ComPact NSX630 without fixed toggle  
vertical 3P 1 direct with long terminal shield 12  
300 mm PrismaSeT G floor-standing duct ComPact NSX630 without fixed toggle  
vertical 4P 1 direct with long terminal shield 12  
300 mm PrismaSeT G wall-mounted duct ComPact NSX630 without fixed toggle  
vertical 4P 1 direct with long terminal shield 12  
300 mm PrismaSeT G floor-standing duct ComPact NSX630 without fixed direct front  
rotary handle vertical 3P 1 direct with long terminal shield 12  
300 mm PrismaSeT G wall-mounted duct ComPact NSX630 without fixed direct front  
rotary handle vertical 3P 1 direct with long terminal shield 12  
300 mm PrismaSeT G floor-standing duct ComPact NSX630 without fixed direct front  
rotary handle vertical 4P 1 direct with long terminal shield 12  
300 mm PrismaSeT G wall-mounted duct ComPact NSX630 without fixed direct front  
rotary handle vertical 4P 1 direct with long terminal shield 12  
300 mm PrismaSeT G floor-standing duct EasyPact CVS400 with fixed toggle  
vertical 3P 1 direct with long terminal shield 13  
300 mm PrismaSeT G wall-mounted duct EasyPact CVS400 with fixed toggle vertical  
3P 1 direct with long terminal shield 13  
300 mm PrismaSeT G floor-standing duct EasyPact CVS400 with fixed toggle  
vertical 4P 1 direct with long terminal shield 13  
300 mm PrismaSeT G wall-mounted duct EasyPact CVS400 with fixed toggle vertical  
4P 1 direct with long terminal shield 13  
300 mm PrismaSeT G floor-standing duct EasyPact CVS630 with fixed toggle  
vertical 3P 1 direct with long terminal shield 13  
300 mm PrismaSeT G wall-mounted duct EasyPact CVS630 with fixed toggle vertical  
3P 1 direct with long terminal shield 13  
300 mm PrismaSeT G floor-standing duct EasyPact CVS630 with fixed toggle  
vertical 4P 1 direct with long terminal shield 13  
300 mm PrismaSeT G wall-mounted duct EasyPact CVS630 with fixed toggle vertical  
4P 1 direct with long terminal shield 13  
300 mm PrismaSeT G floor-standing duct ComPact NSX400 with fixed toggle vertical  
3P 1 direct with long terminal shield 14  
300 mm PrismaSeT G wall-mounted duct ComPact NSX400 with fixed toggle vertical  
3P 1 direct with long terminal shield 14  
300 mm PrismaSeT G floor-standing duct ComPact NSX400 with fixed toggle vertical  
4P 1 direct with long terminal shield 14  
300 mm PrismaSeT G wall-mounted duct ComPact NSX400 with fixed toggle vertical  
4P 1 direct with long terminal shield 14  
300 mm PrismaSeT G floor-standing duct ComPact NSX630 with fixed toggle vertical  
3P 1 direct with long terminal shield 14  
300 mm PrismaSeT G wall-mounted duct ComPact NSX630 with fixed toggle vertical  
3P 1 direct with long terminal shield 14  
300 mm PrismaSeT G floor-standing duct ComPact NSX630 with fixed toggle vertical  
4P 1 direct with long terminal shield 14  
300 mm PrismaSeT G wall-mounted duct ComPact NSX630 with fixed toggle vertical  
4P 1 direct with long terminal shield 14

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.0 cm
Package 1 Width	30.0 cm
Package 1 Length	40.0 cm
Package 1 Weight	4.896 kg
Unit Type of Package 2	P12
Number of Units in Package 2	32
Package 2 Height	71.0 cm
Package 2 Width	80.0 cm
Package 2 Length	120.0 cm
Package 2 Weight	168.0 kg

## Logistical informations

Country of origin	FR
-------------------	----

## Contractual warranty

Warranty (in months)	18
----------------------	----

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

## Use Again

### Repack and remanufacture

End of life manual availability

No need of specific recycling operations


Take-back

No

Technical Illustration

Dimensions

---

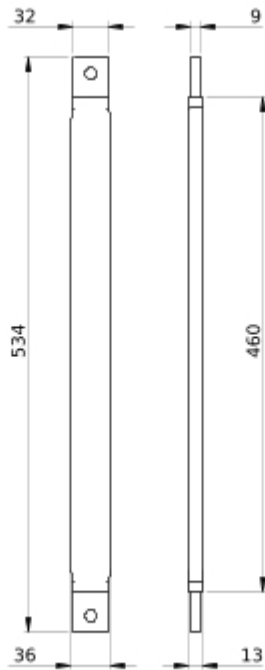

- All dimensions are approximate and are in
- Also see technical documentation.