

# Product datasheet

Specifications



## MODULAR FRONT PLATE W600/ W650 5M

LVS03205

EAN Code: 3606481872715

### Main

<b>Range</b>	PrismaSeT
<b>Range of product</b>	PrismaSeT G PrismaSeT P
<b>Product or component type</b>	Front plate
<b>Accessory / separate part category</b>	Installation accessory
<b>Range compatibility</b>	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
<b>Type of front plate</b>	Modular Cut-out
<b>Installed device</b>	ComPact: fixed INS100 - control: direct front rotary handle - vertical installation ComPact: fixed INS125 - control: direct front rotary handle - vertical installation ComPact: fixed INS160 - control: direct front rotary handle - vertical installation Acti 9: fixed C120 without earth leakage protection - control: toggle TeSys: fixed GV3 Acti 9: fixed iC120 without earth leakage protection - control: toggle Multi9: fixed NG125 without earth leakage protection - control: toggle Multi9: fixed NG125 NA - control: toggle ComPact: fixed NG160 without earth leakage protection - control: toggle ComPact: fixed NG160 NA without earth leakage protection - control: toggle TeSys: fixed TeSys U - horizontal installation Acti 9: fixed C120 with earth leakage protection - control: toggle Acti 9: fixed iC120 with earth leakage protection - control: toggle Multi9: fixed NG125 with earth leakage protection - control: toggle ComPact: fixed NG160 with earth leakage protection - control: toggle ComPact: fixed NSXm without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSXm with earth leakage protection - control: toggle - vertical installation
<b>Poles description</b>	1 x 3P: modular rail support: INS100 vertical installation 1 x 4P: modular rail support: INS100 vertical installation 1 x 3P: modular rail support: INS125 vertical installation 1 x 4P: modular rail support: INS125 vertical installation 1 x 3P: modular rail support: INS160 vertical installation 1 x 4P: modular rail support: INS160 vertical installation 1 x 3P: modular rail support: C120 1 x 4P: modular rail support: C120 7 x 3P: modular rail support: GV3 1 x 3P: modular rail support: iC120 1 x 4P: modular rail support: iC120 1 x 3P: modular rail support: NG125 1 x 4P: modular rail support: NG125 1 x 3P: modular rail support: NG125 NA 1 x 4P: modular rail support: NG125 NA 1 x 3P: modular rail support: NG160 1 x 4P: modular rail support: NG160 1 x 3P: modular rail support: NG160 NA 1 x 4P: modular rail support: NG160 NA 9 x 3P: modular rail support: TeSys U horizontal installation 1 x 3P or 4P: modular rail support: NSXm vertical installation 5 x 3P: mounting plate support: NSXm vertical installation 4 x 4P: mounting plate support: NSXm vertical installation 4 x 3P or 4P: mounting plate support: NSXm vertical installation

---

<b>Operating position</b>	Vertical
---------------------------	----------

## Complementary

---

<b>Enclosure/cubicle description</b>	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm Pack enclosure - width 555 mm
--------------------------------------	--

---

<b>Connection position</b>	Direct connection
----------------------------	-------------------

---

<b>9 mm pitches</b>	48
---------------------	----

---

<b>Number of 18 mm modules per row</b>	24
--	----

---

<b>Number of vertical modules [50 mm]</b>	5
---	---

---

<b>Standards</b>	IEC 61439-2 IEC 61439-1
------------------	----------------------------

---

<b>Product certifications</b>	ASTA
-------------------------------	------

---

<b>Material</b>	Steel
-----------------	-------

---

<b>Surface finish</b>	Textured Matt
-----------------------	------------------

---

<b>Protective treatment</b>	Electrophoresis treatment and hot-polymerised polyester epoxy powder
-----------------------------	--

---

<b>Colour</b>	White (RAL 9003)
---------------	------------------

---

<b>Height</b>	250 mm
---------------	--------

---

<b>Width</b>	500 mm
--------------	--------

---

<b>Net weight</b>	0.92 kg
-------------------	---------

---

<b>Quantity per set</b>	Set of 1
-------------------------	----------

---

---

**functional unit**

600 mm PrismaSeT G floor-standing enclosure Acti 9 C120 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 C120 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Acti 9 C120 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 C120 without fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 C120 without fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 C120 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure TeSys GV3 fixed 3P 7 direct 5  
600 mm PrismaSeT G wall-mounted enclosure TeSys GV3 fixed 3P 7 direct 5  
650 mm 400 mm PrismaSeT P cubicle TeSys GV3 fixed 3P 7 direct 5  
600 mm PrismaSeT G floor-standing enclosure Acti 9 iC120 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 iC120 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Acti 9 iC120 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 iC120 without fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 iC120 without fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 iC120 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact INS100 fixed direct front rotary handle vertical 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact INS100 fixed direct front rotary handle vertical 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact INS100 fixed direct front rotary handle vertical 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact INS100 fixed direct front rotary handle vertical 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact INS100 fixed direct front rotary handle vertical 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact INS100 fixed direct front rotary handle vertical 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact INS125 fixed direct front rotary handle vertical 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact INS125 fixed direct front rotary handle vertical 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact INS125 fixed direct front rotary handle vertical 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact INS125 fixed direct front rotary handle vertical 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact INS125 fixed direct front rotary handle vertical 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact INS125 fixed direct front rotary handle vertical 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact INS160 fixed direct front rotary handle vertical 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact INS160 fixed direct front rotary handle vertical 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact INS160 fixed direct front rotary handle vertical 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact INS160 fixed direct front rotary handle vertical 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact INS160 fixed direct front rotary handle vertical 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact INS160 fixed direct front rotary handle vertical 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Multi9 NG125 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Multi9 NG125 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Multi9 NG125 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Multi9 NG125 without fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Multi9 NG125 without fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Multi9 NG125 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Multi9 NG125 NA fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Multi9 NG125 NA fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Multi9 NG125 NA fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Multi9 NG125 NA fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Multi9 NG125 NA fixed toggle 3P 1 direct 5

---

650 mm 400 mm PrismaSeT P cubicle Multi9 NG125 NA fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact NG160 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact NG160 without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact NG160 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact NG160 without fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact NG160 without fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact NG160 without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact NG160 NA without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact NG160 NA without fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact NG160 NA without fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact NG160 NA without fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact NG160 NA without fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact NG160 NA without fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle TeSys TeSys U fixed horizontal 3P 9 direct 5  
600 mm PrismaSeT G floor-standing enclosure Acti 9 C120 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 C120 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Acti 9 C120 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 C120 with fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 C120 with fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 C120 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Acti 9 iC120 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 iC120 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Acti 9 iC120 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Acti 9 iC120 with fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 iC120 with fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Acti 9 iC120 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Multi9 NG125 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Multi9 NG125 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure Multi9 NG125 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure Multi9 NG125 with fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Multi9 NG125 with fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle Multi9 NG125 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact NG160 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact NG160 with fixed toggle 3P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact NG160 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G wall-mounted enclosure ComPact NG160 with fixed toggle 4P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact NG160 with fixed toggle 3P 1 direct 5  
650 mm 400 mm PrismaSeT P cubicle ComPact NG160 with fixed toggle 4P 1 direct 5  
600 mm PrismaSeT G floor-standing enclosure ComPact NSXm without fixed toggle vertical 3P or 4P 1 direct 7  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSXm without fixed toggle vertical 3P or 4P 1 direct 7  
600 mm PrismaSeT G floor-standing enclosure ComPact NSXm without fixed toggle vertical 3P or 4P 1 connection block 7  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSXm without fixed toggle vertical 3P or 4P 1 connection block 7  
650 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed toggle vertical 3P or 4P 1 direct 8  
650 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed toggle vertical 3P 5 direct 8

---

650 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed toggle vertical 4P 4 direct 8

600 mm PrismaSeT G floor-standing enclosure ComPact NSXm with fixed toggle vertical 3P or 4P 1 direct 7

600 mm PrismaSeT G wall-mounted enclosure ComPact NSXm with fixed toggle vertical 3P or 4P 1 direct 7

600 mm PrismaSeT G floor-standing enclosure ComPact NSXm with fixed toggle vertical 3P or 4P 1 connection block 7

600 mm PrismaSeT G wall-mounted enclosure ComPact NSXm with fixed toggle vertical 3P or 4P 1 connection block 7

650 mm 400 mm PrismaSeT P cubicle ComPact NSXm with fixed toggle vertical 3P or 4P 1 direct 8

650 mm 400 mm PrismaSeT P cubicle ComPact NSXm with fixed toggle vertical 3P or 4P 4 direct 8

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	26.500 cm
Package 1 Length	51.500 cm
Package 1 Weight	899.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	16.500 cm
Package 2 Width	27.200 cm
Package 2 Length	52.000 cm
Package 2 Weight	9.234 kg
Unit Type of Package 3	P12
Number of Units in Package 3	270
Package 3 Height	94.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	261.500 kg

## Logistical informations

Country of origin	FR
-------------------	----

## Contractual warranty

Warranty (in months)	18
----------------------	----

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

## Use Again

### Repack and remanufacture

End of life manual availability

No need of specific recycling operations


Take-back

No

Technical Illustration

Dimensions

---

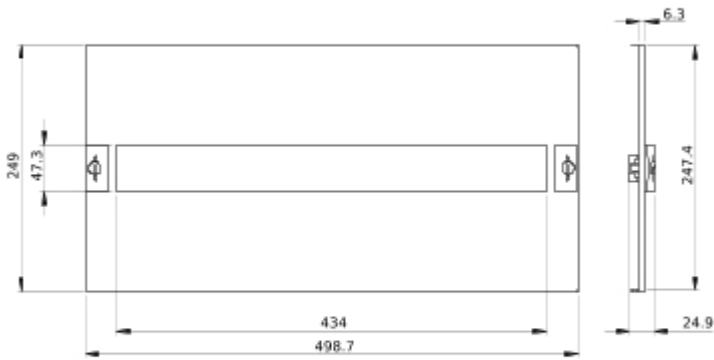

- All dimensions are approximate and are in  
- Also see technical documentation.