


Product datasheet

Specifications



MOUNTING PLATE VIGI NSX/CVS PLUGIN TOGGLE/ROT/MOT - 4P 250A HORIZONTAL WIDTH 650

LVS03414

EAN Code: 3606481874283

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
installation description	Cubicle - width 650 mm depth 400 mm
Installed device	EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism - horizontal installation

Poles description	1 x 4P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX250 horizontal installation 1 x 4P: plug-in NSX100...160 horizontal installation 1 x 4P: plug-in NSX250 horizontal installation
Number of vertical modules [50 mm]	4 module(s): CVS100...160 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS250 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX100...160 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX250 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS100...160 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS250 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX100...160 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX250 with earth leakage protection , direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Textured Matt
Colour	White (RAL 9003)
Width	650 mm
Height	200 mm
Net weight	2.36 kg

Functional unit	650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100...160 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100...160 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in toggle horizontal 4P 1 direct 4 12.5 mm
------------------------	--

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	20.000 cm
Package 1 Length	57.000 cm
Package 1 Weight	2.454 kg
Unit Type of Package 2	P12
Number of Units in Package 2	80
Package 2 Height	75.000 cm
Package 2 Width	80.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	208.320 kg

Logistical informations

Country of origin	IT
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

SCIP Number

4758f26b-dbf8-498a-a5c2-4de140d6aa9a

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

Use Again

Repack and remanufacture

End of life manual availability



No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

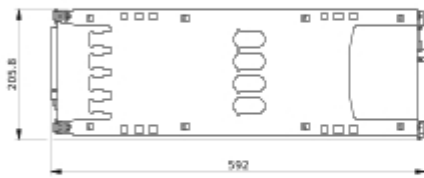

- All dimensions are approximate and are in
- Also see technical documentation.