

AC1326




AS-Interface PROFIBUS DP gateway

ASI DP GATEWAY 2 MASTER

Article no longer available - archive entry

Alternative articles: AC1376

When selecting an alternative article and accessories please note that technical data may differ!

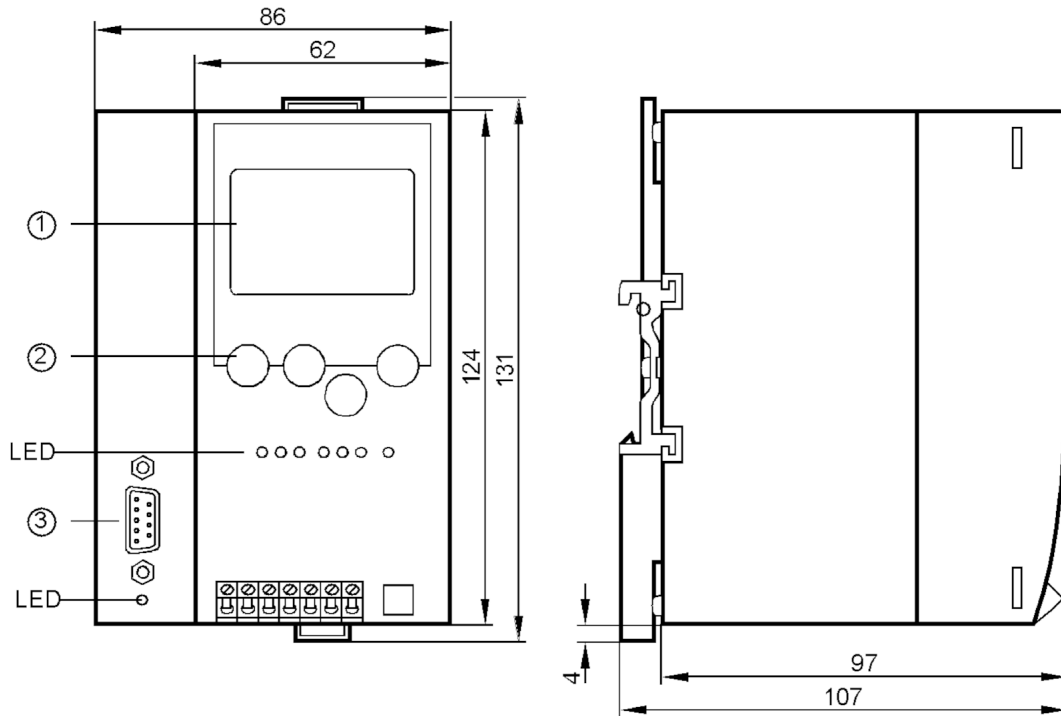

- 1 Display
- 2 pushbutton
- 3 PROFIBUS DP interface



Application

Design	housing for DIN rail mounting
Application	PROFIBUS DP gateway

Electrical data

Operating voltage	[V]	24 DC; ("supply class 2" to cULus)
Insulation rating	[V]	500
Current consumption	[mA]	< 400
Max. current consumption from AS-i	[mA]	10
Max. power consumption	[VA]	10
Number of AS-i masters		2
Electrical separation		yes

Interfaces

Communication interface	PROFIBUS
-------------------------	----------

PROFIBUS

Transmission standard	EN 50170
Transmission rate	12 MBaud
Protocol	Profibus DP

AC1326



AS-Interface PROFIBUS DP gateway

ASI DP GATEWAY 2 MASTER

Usage type	data transmission
Note on interfaces	diagnostic function

Operating conditions

Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-20...70
Max. relative air humidity	[%]	95
Protection		IP 20

AS-i classification

AS-i version		2.1
AS-i master profile		M3
AS-i certificate		61106

Mechanical data

Housing		rectangular
Type of mounting		mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	86 x 131 x 107
Materials		aluminium; steel sheet galvanised

Displays / operating elements

Display	operation	3 x LED, red
		3 x LED, green
		2 x LED, yellow
		full graphic LCD display

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connection

