


E12632



Ethernet connection cable

VSTGX080MSS0005K08STGP080--S

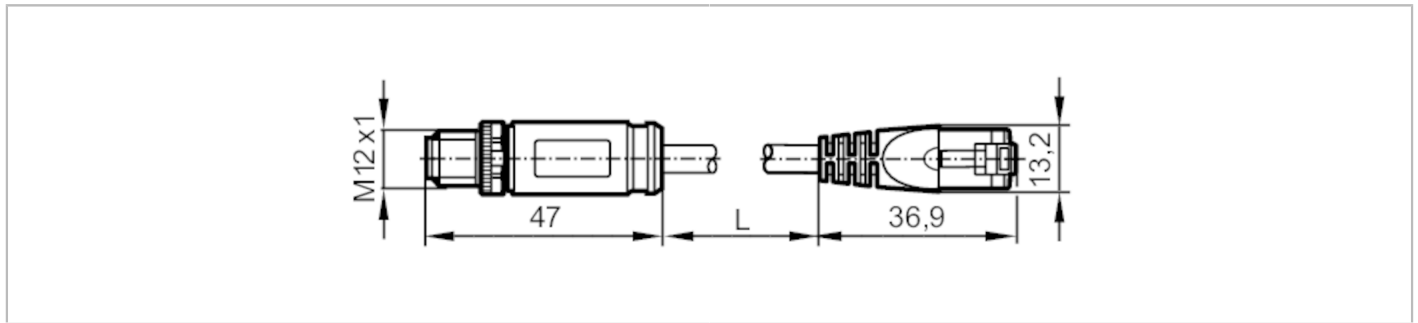

Application		
Special feature	Screened cable; Drag chain suitability	
Design	Ethernet cable, X-coded	
Operating conditions		
Ambient temperature [°C]	-40...85	
Protection	IP 67; IP 20; (M12 plug / RJ45 plug)	
Mechanical data		
Weight [g]	231.9	
Moulded-body material	PA	
Material nut	diecast zinc, nickel-plated	
Drag chain suitability	yes	
Drag chain suitability	bending radius for flexible use	min. 8 x cable diameter
	bending radius for fixed installation	min. 4 x cable diameter
	maximum permissible acceleration	4 m/s ²
	travel speed	4 m/s
	bending cycles	> 1 Mio.
	torsional strain	± 180 °/m
Remarks		
Pack quantity	1 pcs.	
Electrical connection - plug		

Connector: 1 x M12, straight; coding: X; Moulded body: PA, black; Locking: diecast zinc, nickel-plated; Tightening torque: 0.5 Nm



E12632




Ethernet connection cable

VSTGX080MSS0005K08STGP080--S

Electrical connection

Cable: 5 m, PUR, green, Ø 6.2 mm, shielded; 8 x 0.14 mm²

Connection

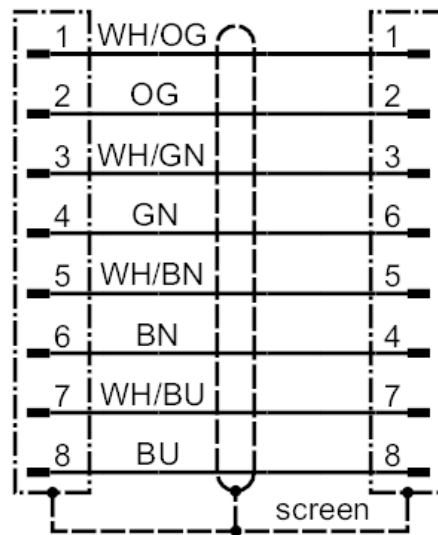

Electrical connection - plug

Connector: 1 x RJ45, straight; Moulded body: PA, black

