


Product datasheet

Specifications



wall-mounting encl. polyester monobloc IP66 H747xW536xD300mm+metal mount.plate

Local distributor code:

403422829

NSYPLM75PG

EAN Code: 3606480776717

Main

Range	PanelSeT
Device short name	PLM
Enclosure type	Multi-purpose
Category	Compact enclosure
Nominal height	747 mm
Nominal width	536 mm
Nominal depth	300 mm
Enclosure mounting	Wall mounted
Device composition	1 body 1 door 1 mounting plate 2 lock
Door type	Plain
Lock type	3 mm double-bar lock

Complementary

Number of locks	2
Mounting plate description	Plain steel
Accessibility for operation	Front
Removable parts	Door by hinges Mounting plate by fixing element
Material	Polyester reinforced with fibreglass
Colour	Grey (RAL 7035)
Standards	IEC 62208 NEMA classification 4X NEMA classification 13
Product certifications	UL
Electrical insulation class	Class II

Environment

IP degree of protection	IP66 conforming to IEC 60529
IK degree of protection	IK10 conforming to IEC 62262
Fire resistance	960 °C conforming to IEC 62208
Ambient air temperature for operation	-40...80 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	32.500 cm
Package 1 Width	56.000 cm
Package 1 Length	81.500 cm
Package 1 Weight	18.080 kg
Unit Type of Package 2	PAM
Number of Units in Package 2	12
Package 2 Height	176.000 cm
Package 2 Width	100.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	229.200 kg

Logistical informations

Country of origin	ES
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	141 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	64 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	36 kg CO2 eq.
Carbon footprint of the installation phase [A5]	4 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	37 kg CO2 eq.

Use Better



Materials and Substances

Average percentage of recycled plastic content	37 %
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	2afadc3c-d04d-4184-9d1f-3abc2fc1a548
REACH Regulation	REACH Declaration

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	5
End of life manual availability	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

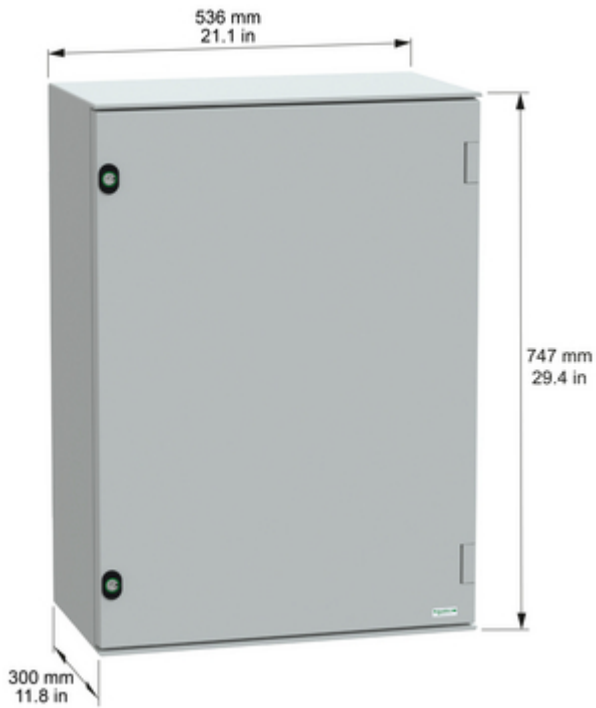


Image of product / Alternate images

Alternative







Image of product in real life situation



Offer Marketing Illustration

Packaging

