

# Product datasheet

Specifications



## FR.PL VIGI NSX.TOG/CVS.ROT -4P 630 HZ 4M

LVS03644

EAN Code: 3606481866127

### Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Installed device</b>	<p>ComPact: fixed NSX400 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX630 without earth leakage protection - control: toggle - horizontal installation</p> <p>EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX400 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX630 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX400 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: plug-in NSX400 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX400 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX400 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: fixed NSX630 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: plug-in NSX630 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX630 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX630 with earth leakage protection - control: motor mechanism - horizontal installation</p>
-------------------------	---

<b>Poles description</b>	<p>1 x 4P: mounting plate support: CVS400 horizontal installation</p> <p>1 x 4P: mounting plate support: CVS630 horizontal installation</p> <p>1 x 4P: mounting plate support: NSX400 horizontal installation</p> <p>1 x 4P: mounting plate support: NSX630 horizontal installation</p>
--------------------------	---

<b>Operating position</b>	Horizontal
---------------------------	------------

## Complementary

<b>Enclosure/cubicle description</b>	Cubicle - width 650 mm depth 400 mm
<b>Connection position</b>	Direct connection
<b>Number of vertical modules [50 mm]</b>	5
<b>Standards</b>	IEC 61439-2 IEC 61439-1
<b>Product certifications</b>	ASTA
<b>Protective treatment</b>	Electrophoresis treatment and hot-polymerised polyester epoxy powder

<b>Surface finish</b>	Textured Matt
<b>Colour</b>	White (RAL 9003)
<b>Height</b>	250 mm
<b>Net weight</b>	0.94 kg
<b>Quantity per set</b>	Set of 1
<b>functional unit</b>	<p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 without fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 without fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without fixed toggle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without fixed motor mechanism horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without plug-in direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without plug-in motor mechanism horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without fixed toggle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without fixed motor mechanism horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in motor mechanism horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 with fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 with fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed toggle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed motor mechanism horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in motor mechanism horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed toggle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in toggle horizontal 4P 1 direct 4</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed motor mechanism horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in direct front rotary handle horizontal 4P 1 direct 5</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in motor mechanism horizontal 4P 1 direct 5</p>

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3.000 cm
<b>Package 1 Width</b>	26.300 cm

Package 1 Length	51.000 cm
Package 1 Weight	946.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	16.500 cm
Package 2 Width	27.000 cm
Package 2 Length	52.500 cm
Package 2 Weight	9.690 kg
Unit Type of Package 3	P12
Number of Units in Package 3	270
Package 3 Height	95.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	269.420 kg

## Logistical informations

Country of origin	FR
-------------------	----

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better



### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

## Use Longer



### Lifetime extension

Repair

No

## Use Again



### Repack and remanufacture

End of life manual availability

No need of specific recycling operations


Take-back

No

Technical Illustration

Dimensions

---

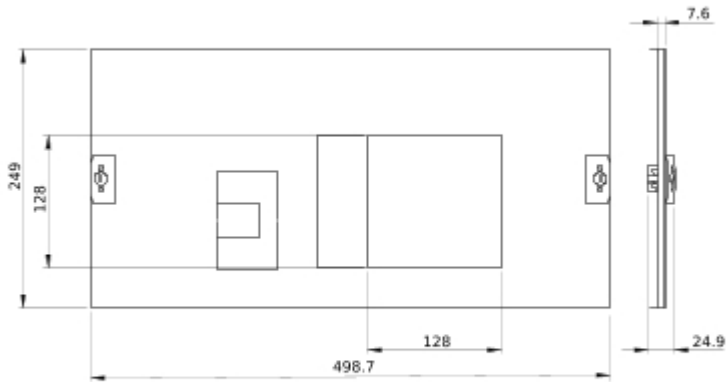

- All dimensions are approximate and are in mm  
- Also see technical documentation.