


E12732



Connecting cable with plug

ASTGH080VAS0010G08

For 8-pole sockets the core colours are not standardised.
Please note the wiring of the sensor and the sockets (see data sheet).

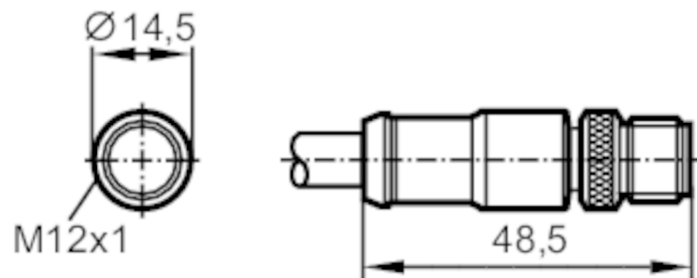

Application	
Special feature	Screened cable
Application	Use in wet areas and in the food industry
Electrical data	
Operating voltage [V]	< 30 AC / < 36 DC
Protection class	III
Operating conditions	
Ambient temperature [°C]	-25...80
Protection	IP 67
Mechanical data	
Weight [g]	678.9
Dimensions [mm]	26.5 x 15 x 38.5
Moulded-body material	PVC
Material nut	stainless steel
Remarks	
Pack quantity	1 pcs.

E12732



Connecting cable with plug


ASTGH080VAS0010G08

Electrical connection


Cable: 10 m, PVC, orange, Ø 6.6 mm, shielded; 8 x 0.25 mm² (14 x Ø 0.15 mm)

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Moulded body: PVC; Locking: stainless steel; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: screen connected



Connection

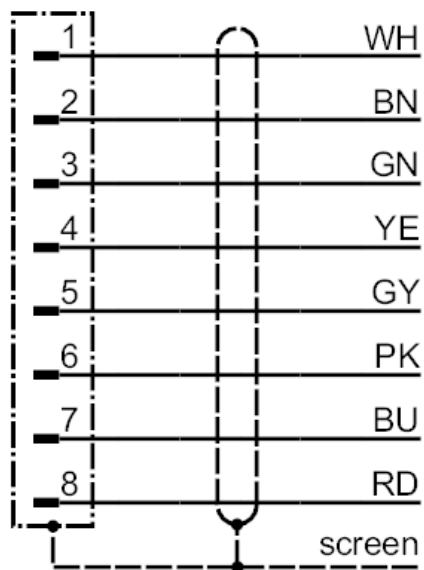

colours to DIN 47100

Core colours :

BN =	brown
BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
WH =	white
YE =	yellow
screen =	screen