

Product datasheet

Specifications

KNX ARGUS Presence, polar white

Local distributor code:

395964437

MTN630819



EAN Code: 3606485099781

Main

Range	SpaceLogic KNX
Product or component type	Presence detector
Bus type	KNX
Colour tint	Polar white
Power supply input current	10 mA

Complementary

Device presentation	Complete product
Number of channels	5
Protection type	Creep zone protection
Type of setting	Light sensitivity adjustable
Duty cycle	15300 minutes
Time delay range	0...1 s (switch-on)
Detection face	Lateral: 7 m
Detection angle	360° horizontal
Device mounting	Flush
Mounting height	2.5 m

Environment

IP degree of protection	IP20
-------------------------	------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.100 cm
Package 1 Width	14.400 cm
Package 1 Length	18.000 cm
Package 1 Weight	186.000 g
Unit Type of Package 2	CAR
Number of Units in Package 2	6
Package 2 Height	20.100 cm
Package 2 Width	30.500 cm

Package 2 Length	40.500 cm
------------------	-----------

Package 2 Weight	1.482 kg
------------------	----------

Logistical informations

Country of origin	LV
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	10 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.2 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	5 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.1 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
SCIP Number	0ff0ee46-a687-403a-8df8-20902e6582a1
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
Halogen-free status	Halogen free product
PVC free	Yes
Silicone-free	Yes

Use Longer




Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	11
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Wiring diagram

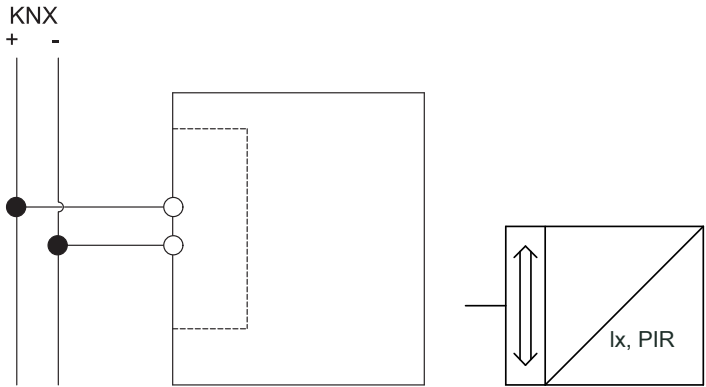

⚠ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH
The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.